UNITED STATES GOVERNMENT MEMORANDUM

May 1, 2018

To: Public Information (MS 5030)

From: Plan Coordinator, FO, Plans Section (MS

5231)

Subject: Public Information copy of plan

Control # - N-10014

Type - Initial Development Operations Coordinations Document

Lease(s) - OCS-G21444 Block - 875 Keathley Canyon Area OCS-G21447 Block - 919 Keathley Canyon Area

OCS-G32654 Block - 918 Keathley Canyon Area

Operator - Anadarko Petroleum Corporation

Description - Well 005 (KC 875), Wells 001 and 003 (KC 918), Wells 008 and

Rig Type - 009 (KC 919)

Not Found

NOC FOUND

Attached is a copy of the subject plan.

It has been deemed submitted as of this date and is under review for approval.

Madonna Montz Plan Coordinator

Site Type/Name	Botm Lse/Area/Blk	Surface Location	Surf Lse/Area/Blk
WELL/001	G32654/KC/918	7706 FSL, 535 FEL	G32654/KC/918
WELL/003	G32654/KC/918	739 FSL, 2469 FWL	G21444/KC/875
WELL/005	G21444/KC/875	739 FSL, 2469 FWL	G21444/KC/875
WELL/008	G21447/KC/919	6840 FSL, 632 FWL	G21447/KC/919
WELL/009	G21447/KC/919	739 FSL, 2469 FWL	G21444/KC/875

INITIAL DEVELOPMENT OPERATIONS COORDINATION DOCUMENT

KEATHLEY CANYON BLOCKS 875, 918, and 919 OCS-G 21444, 32654, and 21447

OFFSHORE, LOUISIANA

Public

Anadarko Petroleum Corporation 1201 Lake Robbins Drive The Woodlands, Texas 77380 Contact: Jill Fowler Jill.fowler@anadarko.com (832) 636-1554

- 1 Hard Copy Confidential
- 1 CD Confidential
- 1 Hard Copy Public Information
- 3 CDs Public Information

April, 2018

ANADARKO PETROLEUM CORPORATION INITIAL DEVELOPMENT OPERATIONS COORDINATION DOCUMENT

KEATHLEY CANYON BLOCKS 875, 918, AND 919 OCS-G 21444, 32654, and 21447

A.	Plan Contents
В.	General Information
C.	Geological, Geophysical
D.	Hydrogen Sulfide Information
Е.	Mineral Resource Conservation Information
F.	Biological, Physical and Socioeconomic Information
G.	Wastes and Discharge Information
Н.	Air Emissions Information
[.	Oil Spill Information
J .	Environmental Monitoring Information
К.	Lease Stipulations
L.	Related Facilities and Operations Information
M.	Support Vessels and Aircraft Information
N.	Onshore Support Facilities Information
О.	Coastal Zone Management Act Information
Ρ.	Environmental Impact Analysis
o	Administrative Information

A PLAN CONTENTS

(a) Plan Information Form

Under this Initial DOCD Anadarko will conduct completion operations on one well, the KC 918 #001 ST02, place five wells on production, the KC 875 #005, KC 918 #001 ST02, KC 918 #003, KC 919 #008, and KC 919 #009, and conduct subsea installation activities for a new umbilical, lease term pipeline, and five well jumpers. Enclosed as **Attachment A-1** is Form BOEM-137, OCS Plan Information Form.

(b) Location

Enclosed as Attachment A-2 is a well location plat at a scale of 1 inch = 2000 feet that depicts the surface location and water depth of the subsea wells.

(c) Safety and Pollution Prevention Features

Safety features on the platform will include well control, pollution prevention, safe welding procedures, and blowout prevention equipment as described in Title 30 CFR Part 250, Subparts C, D, E, G and O; and as further clarified by BOEM Notices to Lessees, and applicable regulations of the Environmental Protection Agency and the U.S. Coast Guard. The appropriate life rafts, life jackets, ring buoys, etc., as prescribed by the U.S. Coast Guard, will be maintained on the facility at all times.

Per NTL 2008-G04, Anadarko proposes additional measures for safety, pollution prevention, and early spill detection beyond those required by 30 CFR 250, as outlined in Anadarko's Regional Oil Spill Response Plan. These additional measures include:

- 1. Shipboard Oil Pollution Emergency Plan
- 2. Operations Manual
- 3. Spill Prevention Control and Countermeasures Plan

Procedures for fuel transfers and well control programs are also detailed in the Regional Oil Spill Response Plan.

(d) Storage Tanks and Production Vessels

The Keathley Canyon Blocks 875, 918, and 919 wells will utilize a contracted ROV Vessel and/or DP Construction Vessel, Reeled Pipe-Lay Vessel, and Umbilical Lay Vessel to conduct the subsea installation operations. The KC 918 #001 ST02 well will utilize a contracted drillship during completion operations only. Another vessel may be utilized during operations, but will have a total storage tank capacity equal to or less than the following:

Type of Facility	Type Of Storage Tank	Tank Capacity	Number Of Tanks	Total Capacity	Fluid Gravity (Api)	Total Capacity of all Tanks for Facility Type
ROV Vessel	ROV Vessel Fuel-Oil Strg Tank		1	4454.4 bbls	No. 2 Diesel	16 tanks total= 17,614.3 bbls
	Fuel Oil Strg Tank	4061.3 bbls	1	4061.3 bbls	No. 2 Diesel	
	Fuel Oil Strg Tank	3173.8 bbls	1	3173.8 bbls	No. 2 Diesel	
	Fuel Oil Strg Tank	3772.6 bbls	1	3772.6 bbls	No. 2 Diesel	
	Fuel Oil Strg Tank	717.7 bbls	1	717.7 bbls	No. 2 Diesel	
	Fuel Oil Day Tank	26.4 bbls	2	52.8 bbls	No. 2 Diesel	
	Settling Tank	183.0 bbls	3	549.0 bbls	No. 2 Diesel	
	Settling Tank	305.7 bbls	1	305.7 bbls	No. 2 Diesel	
	Service Tank	162.9 bbls	2	325.8 bbls	No. 2 Diesel	
	Overflow Tank	44.0 bbls	1	44.0 bbls	No. 2 Diesel	
	Overflow Tank	91.2 bbls	1	91.2 bbls	No. 2 Diesel	
	Drain Tank	66.0 bbls	1	66.0 bbls	No. 2 Diesel	

Type of Facility	Type Of Storage Tank	Tank Capacity	Number Of Tanks	Total Capacity	Fluid Gravity (Api)	Total Capacity of all Tanks for Facility Type
DP Construction Vessel/ Pipe-Lay/ Umbilical-Lay Vessel	Fuel Oil Strg Tank	3458.7 bbls	2	6917.4 bbls	No. 2 Diesel	27 tanks total= 28,583.1 bbls
	Fuel Oil Strg Tank	3483.9 bbls	2	6967.8 bbls	No. 2 Diesel	
	Fuel Oil Strg Tank	1323 bbls	2	2646 bbls	No. 2 Diesel	
	Fuel Oil Strg Tank	907.2 bbls	2	1814.4 bbls	No. 2 Diesel	
	Fuel Oil Strg Tank	2230.2 bbls	2	4460.4 bbls	No. 2 Diesel	
	Overflow Tank	201.6 bbls	2	403.2 bbls	No. 2 Diesel	
	Day Tank and Settling Tank	793.8 bbls	2	1587.6 bbls	No. 2 Diesel	
	Day Tank and Settling Tank	743.4 bbls	2	1486.8 bbls	No. 2 Diesel	
	Drain Tank	182.7 bbls	2	365.4 bbls	No. 2 Diesel	
	Deck Drain Waste Oil	289.8 bbls	1	289.8 bbls		
	Dirty Oil	176.4 bbls	1	176.4 bbls		
	Renovated Oil	132.3 bbls	2	264.6 bbls	Lube Oil	
	Lube Oil Storage	485.1 bbls	2	970.2 bbls	Lube Oil	

	Hydraulic Oil Storage Tank	69.3 bbls	2	138.6 bbls	Hydraulic Oil	
	Dirty Hydraulic Oil Storage Tank	94.5 bbls	1	94.5 bbls	Hydraulic Oil	

Type of Facility Type Of Storage Tank		Tank Capacity	Number Of Tanks	Total Capacity	Fluid Gravity (Api)	Total Capacity of all Tanks for Rig Type
Drillship (KC 918 #001 ST02 Completion Ops Only)	O01 ST02 Oil Storage Tank		2	11,028 bbls	No. 2 Diesel/ varies	12 tanks total= 62,874 bbls
	Hydrocarbons/Fuel Oil Storage Tank	12,458 bbls	2	24,916 bbls	No. 2 Diesel/ varies	
	Hydrocarbons/Fuel Oil Storage Tank	12,065 bbls	2	24,130 bbls	No. 2 Diesel/ varies	
	Fuel Oil Settling Tanks	ttling 640 bbls 2 1,280 bbls		1,280 bbls	No. 2 Diesel	
	Fuel Oil Service Tanks	480 bbls	3	1,440 bbls	No. 2 Diesel	
	Fuel Oil Emergency Generator Tank	80 bbls	1	80 bbls	No. 2 Diesel	

(e) Pollution Prevention Measures

Per NTL 2008-G04, Anadarko proposes additional measures for safety, pollution prevention, and early spill detection beyond those required by 30 CFR 250, as outlined in Anadarko's Regional Oil Spill Response Plan. These additional measures include:

- 1. Shipboard Oil Pollution Emergency Plan
- 2. Operations Manual
- 3. Spill Prevention Control and Countermeasures Plan

Procedures for fuel transfers and well control programs are detailed in the Regional Oil Spill Response Plan.

Production from Keathley Canyon Blocks 875, 918, and 919 will be transported to Anadarko's Lucius Spar in Keathley Canyon Block 875.

The facilities are designed, installed and operated in accordance with current regulations, engineering documents incorporated by reference, and industry practice in order to ensure protection of personnel, environment and the facilities. When necessary, maintenance or repairs that are necessary to prevent pollution of offshore waters shall be undertaken immediately.

The pollution prevention measures for the facility include installation of curbs, gutters, drip pans, and drains on deck areas to collect all contaminants and debris.

The facility is designed to produce oil and gas. All equipment, such as separators, tanks and treaters, utilized for the handling of hydrocarbons are designed, installed and operated to prevent pollution. Necessary maintenance or repair work needed to prevent pollution of offshore waters shall be performed immediately. Curbs, gutters, drip pans and drains are installed in deck areas in a manner necessary to collect all contaminants not authorized for discharge. Any unexpected oil drainage will be piped to an operated and maintained sump system which will automatically maintain the oil at a level sufficient to prevent discharge of oil into offshore waters. All gravity drains are equipped with a water trap or other means to prevent gas in the sump system from escaping through the drains. Sump piles will not be used as processing devices to treat or skim liquids, but may be used to collect treated liquids from drip pans and deck drains and as a final trap for hydrocarbon liquid in the event of equipment upsets. There will be no disposal of equipment, cables, chains, containers or other materials into offshore waters.

Supervisory and certain designated personnel on-board the facility are familiar with the effluent limitations and guidelines for overboard discharges into the receiving waters as outlined in the NPDES General Permit for the EPA Region IV.

Production safety equipment was designed, and is installed, used, maintained, and tested in a manner to assure the safety and protection of the human, marine, and coastal environments in accordance with 30 CFR 250 Subpart H. Anadarko will perform all installation and production operations in a safe and workmanlike manner, and will maintain all equipment in a safe condition, thereby ensuring the protection of lease and associated facilities, the health and safety of all persons, and the preservation and conservation of property and the environment. The appropriate life rafts, life jackets, ring buoys, etc., as prescribed by the U.S. Coast Guard, will be maintained on the facility at all times.

Any platform production facilities shall be protected with a basic and ancillary surface system designed, analyzed, installed, tested, and maintained in operating condition in accordance with the provisions of API RP 14C, Recommended Practice for Analysis, Design, Installation and Testing of Basic Surface Safety Systems for Offshore Production Platforms.

The Lucius Spar is a manned structure, and will be identified and reported in accordance with the requirements of the U.S. Coast Guard and BOEM/BSEE. The unit is a floating production system of the spar design using a conventional mooring system. It is considered a floating facility and is inspected and constructed to the requirements of 46 CFR Parts 107 and 108 as directed by 33 CFR 143.120.

(f) Description of Previously Approved Lease Activities

An Initial Exploration Plan (Plan Control No. N-9428) was approved on September 8, 2009 for KC 875 well locations "A & B".

Plan Control No.	Well Location	Status of Well Location	Potential Future Operations
N-9428	A	Location was used to drill well #SS001 ST01.	The well is currently producing.

N-9428	В	Location was used to drill well #SS002.	The	well	is	currently
			tempo	rarily al	oando	ned.

An Initial Exploration Plan (Plan Control No. N-9593) was approved on November 17, 2011 for KC 875 well locations "D, F, G, & H".

Plan Control No.	Well Location	Status of Well Location	Potential Future Operations
N-9593	D	Location was used to drill well KC 875 #003.	The well is currently producing.
N-9593	F	Approved well location for future utility.	Future drill location.
N-9593	G	Plan to use location for drilling KC 875 #005	Future drill location.
N-9593	Н	Approved well location for future utility.	Future drill location.

A Supplemental Exploration Plan (Plan Control No. S-7570) was approved on October 11, 2012 for KC 875 well location "I":

Plan Control No.	Well Location	Status of Well Location	Potential Future Operations
S-7570	I	Approved well location for future utility.	Future drill location.

A Supplemental Exploration Plan (Plan Control No. S-7757) was approved on September 23, 2015 for KC 875 well locations "DD, DDD, J, & JJ":

Plan	Well	Status of Well Location	Potential Future Operations
Control	Location		
No.			
S-7757	DD	Approved well location for future utility.	Future drill location.
S-7757	DDD	Approved well location for future utility.	Future drill location.
S-7757	J	Approved well location for future utility.	Future drill location.
S-7757	JJ	Location utilized to drill well #SS004.	Place well on production

A Revised Exploration Plan (Plan Control No. R-6450) was approved on March 30, 2016 for KC 875/919 well location "EE".

Plan Control No.	Well Location	Status of Well Location	Potential Future Operations
R-6450	EE	Plan to use location for drilling KC 919 #009	Future drill location.

Anadarko has previously approved well locations in Keathley Canyon Block 918. Approval was granted to drill and complete the following three well locations under the Supplemental Exploration Plan for Keathley Canyon Block 918 (Plan Control No. S-7848) approved on July 14, 2017:

Well	Status of Well Location	Potential Future Operations
Location		_
AA	Plan to use location for drilling KC	Future drill location.
	918 #003	
BB	Approved well location for future	Future drill location.
	utility.	
CC	Approved well location for future	Future drill location.
	utility.	

The following reflects Exxon Mobil Corporation's previously approved activities in Keathley Canyon Block 918:

Plan Control No.	Well Location	Status of Well Location	Potential Future Operations
N-9623	A	Location was drilled in 2013 (KC 918 #002)	Place on production.
N-9623	В	Location was drilled in 2012 (KC 918 #001 ST02)	Complete and place on production
N-9623	С	Approved well location for future utility	The well is currently temporarily abandoned.

Anadarko has previously approved well locations in Keathley Canyon Block 919. Approval was granted to drill and complete the following five well locations under the Supplemental Exploration Plan for Keathley Canyon Block 919 (Plan Control No. S-7570) approved on October 11, 2012:

Well	Status of Well Location	Potential Future
Location		Operations
AA	Location used to drill KC 919 #005 well.	Place on Production
BB	Location used to drill KC 919 #006 well.	Place on Production
CC	Location used to drill KC 919 #007 well.	Place on Production
DD	Approved well location for future utility.	Future drill location.
EE	Approved location for future utility; revised location under	Future drill location.
	R-6450.	

Anadarko has previously approved well locations in Keathley Canyon Block 919. Approval was granted to drill and complete the following four well locations under the Supplemental Exploration Plan for Keathley Canyon Block 919 (Plan Control No. S-7606) approved on June 20, 2013:

Well	Status of Well Location	Potential Future Operations
Location		_
FF	Approved well location for future utility.	Future drill location.
GG	Approved well location for future utility.	Future drill location.
II	Approved well location for future utility.	Future drill location.
JJ	Approved well location for future utility.	Future drill location.

The following reflects Exxon Mobil Corporation's previously approved activities in Keathley Canyon Block 919:

Plan	Well	Status of Well Location	Potential Future Operations
Control	Location		
No.			
N-8115	A	Location was drilled in 2004.	Place on production.
N-8115	В	Approved well location for future utility.	Future drill location.
S-7330	С	Location was drilled in 2010.	Well is P&A'd.
S-7330	D	Approved well location for future utility.	Future drill location.
S-7330	E	Location was drilled in 2012.	Place on production.
S-7330	F	Location was drilled in 2011.	Place on production.

Approval was granted for the following well locations under the Supplemental Exploration Plan for Keathley Canyon Blocks 918 and 919 (Plan Control No. S<u>-7882</u>) approved on March 2, 2018:

Well Location	Status of Well Location	Potential Future
		Operations
KC 918 D	Approved well location for future utility	Future drill location
KC 918 DD	Approved well location for future utility	Future drill location
KC 918 E	Approved well location for future utility	Future drill location
KC 918 EE	Approved well location for future utility	Future drill location
KC 918 F	Approved well location for future utility	Future drill location
KC 918 FF	Approved well location for future utility	Future drill location
KC 919 K	Plan to use location for drilling KC 919 #008	Future drill location
KC 919 KK	Approved well location for future utility	Future drill location
KC 919 L	Approved well location for future utility	Future drill location
KC 919 LL	Approved well location for future utility	Future drill location

OCS PLAN INFORMATION FORM

	General Information													
6000	of OCS Plan:	°		tion Plan (El	28			oordination Docu	ment (I	OOCD)		x	
	any Name: Anadarko	Petrole	eum	Corporation	77 23	BOEM Operator Number: 00981								
Addre	ess:					Contact Per								
	1201 Lak	e Robb	ins [Or.		Phone Nun	Phone Number: 832-636-1554							
	The Woodl	ands, T	X 77	7380		E-Mail Add	dress: jill.fo	wler@anadark	o.com					
If a se	rvice fee is required u	nder 30	CFR	550.125(a),	provide t		mount paid		Dag	eipt N	lo.	7	54593153	300
			J	Project an				(WCD) Infor						
Lease	(s): OCS-G 21444, 326	54, 2144	7 A	Area: KC	Block			f Applicable): _{Lu}		drian l	N.			
	tive(s) X Oil X	Gas		Sulphur	Salt			se(s): Fourchon,	LA					
Platfo	rm/Well Name: _{KC 875}	SS001 ST)1 T	otal Volume					API C		31.0			
Distar	nce to Closest Land (M	files): 2	13 m	iles	Volu	ne from unco	ontrolled b	lowout: 2,660,00	00 bbls	of oil				
Have	you previously provid	ed infor	matic	on to verify tl	ne calcula	ations and ass	sumptions	for your WCD?		х	Yes		No	
If so,	provide the Control N	ımber o	f the	EP or DOCI	with wh	nich this infor	rmation wa	s provided	'A	N-96	64			
Do yo	ou propose to use new	or unusi	ıal te	chnology to	conduct y	our activities	s?				Yes	x	No	
Do yo	ou propose to use a ves	sel with	anch	nors to install	or modif	fy a structure	?				Yes	х	No	
Do you propose any facility that will serve as a host facility for						r deepwater s	deepwater subsea development? Yes X N						No	
Description of Proposed Activities and Tentative Schedule (Mark all that apply)														
	Propos	sed Acti	ivity	8		Start	Date	End 1	Date			N	o. of Days	
KC 91	9 008: jumper install & c	ommenc	e prod	luction		8/15/2018 8/20/2018							5	
KC 91	9 009: jumper install & o	commend	e pro	duction		9/15/2018 9/20/2018			2018				5	
KC 91	8 001 ST02: conduct com	pletion o	perati	ions		10/4/2018 11/28/2018			2018	56			56	
KC 91	8 001 ST02: jumper insta	all & con	menc	e production		11/29	/2018	12/4/2	2018				5	
KC 87	5 005: jumper install & c	ommenc	e prod	luction		1/1/2	2019	1/6/2	019				5	
KC 91	8 003: jumper install & c	ommenc	e proc	duction		2/1/2	2019	2/6/2	019				5	
New p	ipeline & umbilical instal	llation op	S			2/7/2	2019	3/11/2	2019				32	
						7								
		ption	of D	rilling Rig	Ţ				scripti		f Struct			
	Jackup	×		Drillship				isson			Tension l	10000000		
	Gorilla Jackup			Platform r	- T			ked platform			Complian		ver er	
	Semisubmersible			Submersib	9905777		Sp	No. Control of Control			Guyed to			
	DP Semisubmersible			Other (Att		ription)		pating production	L		Other (A	ttach	Description)	
Drilli	ng Rig Name (If Know	'n): DP	Cons	struction Ve	ssel		sys	stem						
					-			n Pipelines						
Fro	m (Facility/Area/Bloo	ck)		To (Facility	/Area/B	lock)		Diameter (Inche	s)			Len	gth (Feet)	
	See attached													
		\perp												

OMB Control Number: 1010-0151 OMB Approval Expires: 12/31/14

BOEM Form 137 Description of Lease Term Pipelines

From (Facility/Area/Block)	To (Facility/Area/Block)	Diameter (Inches)	Length (Feet)
KC 919 #9 (or alternate well KC 875 #5 or KC 918 #3)	KC 875 West Manifold	6"	75
KC 919 #8	KC 919 South Manifold	6"	75
KC 918 #1 ST2	KC 919 PLEM P17B	6"	75
KC 919 South Manifold	KC 875 East Manifold	8"	11,000
KC 919 South Manifold	KC 875 East Manifold	8"	11,000
KC PLEM P17B	KC 919 South Manifold	6"	1500
SUTA IFUSA	SUTA IFUSB	4"	1500


Proposed Well/Structure Location															
Well or Structustructure, refere							eviewed	under an app	roved E	EP or	х	Yes		No N-959	93
Is this an existi or structure?	ng well	Ye	x X		nis is an nplex II			r structure, lis	st the						
Do you plan to	use a subsea	BOP or a	surface BO	OP on a floa	ting fac	ility to	conduct	your propose	ed activ	ities?	Х	Ye	es		No
WCD info	For wells, v blowout (Bl				or struc ipelines			f all storage a	ınd		API Gravity of fluid n/a				
	Surface Lo	cation			Botto	m-Hole	Locatio	on (For Well	s)		enter	pletion separa			le completions,
Lease No.	OCS G-21444				OCS						OCS OCS				
Area Name	KEA	THLEY	CANY	ON											
Block No.		87	5												
Blockline Departures (in feet)	739.10		F	L	N/S D	epartu	re:		F	- 102 103 103 103 103 103 103 103 103 103 103	N/S I	Departu Departu Departu	re:		FL FL F L
	E/W Depart 2469.2		/ L	L	E/W I	Departu	re:		F	L	E/W . E/W .	Departi Departi Departi	ure: ure:		FL FL F L
Lambert X- Y coordinates	x: 19507	789.20)		X:					23	X: X: X:				
	Y: 94730)59.10)		Y:						Y: Y: Y:				
Latitude/ Longitude	Latitude 26.10	41117	7		Latitude						Latitude Latitude Latitude				
	Longitude -92.05	53925	50		Longitude						Longitude Longitude Longitude				
Water Depth (I 6825'	Feet):				MD (I	Feet):		TVD (Feet)	I			Feet): Feet):			(Feet): (Feet):
Anchor Radius	(if applicabl	e) in feet:					N/A	L				Feet):			(Feet):
Anchor Loc	cations for	· Drilling	Rig or	Construc	tion B	arge	(If anch	or radius suj	pplied a	above,	not r	iecessa	ry)		
Anchor Name or No.	Area	Block	X Coord	inate		Y Co	ordinate)]	Lengtl	h of A	nchor	Chai	n on Se	afloor
			X =			Y =									
			X =			Y =			i de						
			X =			Y=									
			X =			Y =									
			X =		Y =										
			X =		Y =										
			X =		Y=										
			X =			Y =			3						

Proposed Well/Structure Location																
Well or Structustructure, refere	Yell or Structure Name/Number (If renaming well or ructure, reference previous name): KC 918 #1 ST02 (Loc. "B", N-9623) OOCD? Yes No N-9623															
Is this an existi or structure?	ng well	Ye			this is an existing well or structure, list the omplex ID or API No.						6080840032-02					
Do you plan to	use a subsea	BOP or a	surface BOP on a	floating fa	cility to	conduct	your proposed acti	vities?	х	Ye	s		No			
WCD info	For wells, ve blowout (Bb			For struc			f all storage and		API Gravity of fluid n/a							
	Surface Loc	cation		Botto	m-Hole	Locatio	on (For Wells)			pletion separa			e completions,			
Lease No.	OCS G-32654			OCS					OCS OCS							
Area Name	KEA	THLEY	CANYON													
Block No.		91	8													
Blockline Departures (in feet)	N/S Departu 7705 .8		FL	N/S I	Departur	e:	F	L	N/S I	Departu Departu Departu	re:		FL FL F L			
(in reet)	E/W Depart	ure:	FL	E/W	Departui	re:	F	L	E/W	Departi Departi Departi	ire:		FL FL			
	534.51	'FEL							E/W	Departi			FL			
Lambert X- Y coordinates	x: 19477	85.49	93	X:					X: X: X:							
	Y: 94641	85.89	95	Y:	Y:						Y: Y: Y:					
Latitude/ Longitude	Latitude 26.079	9752 ⁻	1	Latitu	Latitude						Latitude Latitude Latitude					
	Longitude -92.06	3274	.3	Long	itude				Longitude Longitude Longitude							
Water Depth (I 7381'	Feet):			MD (Feet):		TVD (Feet):		MD ((Feet): (Feet):			(Feet): (Feet):			
Anchor Radius	(if applicable	e) in feet:				N/A				Feet):			(Feet):			
Anchor Loc	cations for	Drilling	Rig or Consti	ruction I	Barge (If anch	or radius supplied	above	, not 1	iecessa	ry)					
Anchor Name or No.	Area	Block	X Coordinate		Y Coo	ordinate		Lengt	th of A	Anchor	Chair	n on Sea	afloor			
			X =		Y =											
			X =		Y =											
			X =		Y =											
			X =		Y =											
			X =		Y =											
			X =		Y = Y =											
			X =		Y =											
			43													

				Propo	osed V	Well/Structu	ire Locat	ion							
Well or Structu structure, refer	ire Name/N ence previo	umber (If re us name): K	enaming well o C 918 #3 (Loc."AA	Γ \", S-7848	Previ DOC	iously reviewe CD?	d under an a	pproved	EP or	X	Yes		No S-784	8	
Is this an exist or structure?	ing well	Y	es N			n existing well D or API No.	or structure,	, list the							
Do you plan to	use a subse	ea BOP or a	surface BOP o	on a floa	ting fac	cility to conduc	t your prope	osed activ	vities?	х	Ye	S		No	
WCD info		volume of Bbls/day): r	incontrolled /a			ctures, volume s (Bbls): n/a	of all storag	e and		API C	ravity (of	n/a		
	Surface L	ocation			Botto	m-Hole Locat	ion (For W	ells)			pletion separa		multiple nes)	e comp	letions,
Lease No.	OCS G-21444				OCS					OCS OCS					
Area Name	KE	ATHLE\	CANYON	١											
Block No.		87	75												
Blockline Departures (in feet)	N/S Depar 739.1	rture: 0' FSL	F	_L	N/S I	Departure:		F	_L	N/S I	Departu Departu Departu	re:		F F F	L L L
	E/W Depa 2469.	rture: 20' FV	_L	E/W I	Departure:		F	L	E/W E/W	Departi Departi Departi	ire: ire:		F F	 L L	
Lambert X- Y coordinates	x: 1950	789.2	0		X:		X: X: X:								
	Y: 9473	059.1	0		Y:			Y: Y: Y:							
Latitude/ Longitude	Latitude 26.10)4111	7		Latitu	ıde		Latitude Latitude Latitude							
	Longitude -92.0	53925	50		Longi	itude				Longitude Longitude Longitude					
Water Depth (I 6825'	Feet):				MD (Feet):	TVD (Fe	et):			(Feet):			(Feet):	
Anchor Radius	(if applical	ole) in feet:			Į.	N/A					(Feet): (Feet):			(Feet):	
Anchor Lo	cations fo	r Drillin	g Rig or Co	nstruc	tion E	Barge (If anc	hor radius	supplied	above	, not	necessa	ry)			
Anchor Name		Block	X Coordina			Y Coordina						- C1-20	in on Sea	floor	
		+	X =			Y =									
			X =			Y =									
			X =			Y =									
			X =			Y =									
			X =		Y =										
			X =			Y =									
			X =		Y =										
			X =		Y =										

	Proposed Well/Structure Location												
	Vell or Structure Name/Number (If renaming well or ructure, reference previous name): KC 919 #8 (Loc. "K", S-7882) Previously reviewed under an approved EP or DOCD? Yes No S-7882												
Is this an existi or structure?	ng well	Ye			s is an existing well or structure, list the plex ID or API No.								
Do you plan to	use a subsea	BOP or a	surface BOP on a f	loating fac	ility to co	onduct	your proposed acti	ivities?	х	Ye	es		No
WCD info	For wells, v blowout (Bl				tures, vol (Bbls):		f all storage and		API Gravity of fluid n/a				
	Surface Lo	cation		Botto	m-Hole I	Locatio	on (For Wells)			pletion separa			e completions,
Lease No.	OCS G-21447			OCS					OCS OCS				
Area Name	KEA	THLEY	CANYON										
Block No.		91	9										
Blockline Departures (in feet)	N/S Departs 6840'		FL	N/S I	eparture:		F	L	N/S I	Departu Departu Departu	re:		FL FL F L
	E/W Depart		FL	E/W I	Departure	:	F	L	E/W E/W	Departi Departi Departi	ure: ure:		FL FL F L
Lambert X- Y coordinates	x: 19489	952.00)	X:					X: X: X:				
	Y: 94633	320.00)	Y:	Y:								
Latitude/ Longitude	Latitude 26.07	7346		Latitu	de				Latitude Latitude Latitude				
	Longitude -92.05	59739		Long	tude				Longitude Longitude Longitude				
Water Depth (I 7393'	Feet):			MD (Feet):		TVD (Feet):		0.7	Feet): Feet):			(Feet): (Feet):
Anchor Radius	(if applicable	e) in feet:			N	I/A	l <u>;</u>			Feet):			(Feet):
Anchor Loc	cations for	Drilling	Rig or Constr	uction E	Barge (I	f anch	or radius supplied	l above	, not r	iecessa	ry)		
Anchor Name or No.	Area	Block	X Coordinate		Y Coor	dinate		Lengt	th of A	nchor	Chai	n on Sea	afloor
			X =		Y =								
			X =		Y =								
			X =		Y =								
			X =		Y =								
			X =		Y =								
u			X =		Y =								
			X =		Y =								
	L		X =		Y =			3					

Proposed Well/Structure Location															
Well or Structure Name/Number (If renaming well or structure, reference previous name): KC 919 #9 (Loc. EE, R-6450) DOCD?					X	Yes		No R-645	0						
Is this an existing well Yes No If this is an existing well or structure, list the or structure? X Complex ID or API No.															
Do you plan to	use a subse	ea BOP or a	surface BOP o	n a floa	ting fac	cility to conduc	t your prop	osed acti	vities?	х	Ye	S		No	
WCD info		volume of a Bbls/day): n	incontrolled /a			ctures, volume s (Bbls): n/a	of all storag	ge and		API C	ravity (of	n/a		
	Surface L	ocation			Bottom-Hole Location (For Wells)				Completion (For multiple completions, enter separate lines)						
Lease No.	OCS G-21444				OCS					OCS OCS					
Area Name	KE	ATHLE	CANYON	1											
Block No.		87	75												
Blockline Departures (in feet)	N/S Depar 739.1	ture: 0' FSL	. F	_L	N/S I	Departure:		F	_L	N/S Departure: F L N/S Departure: F L N/S Departure: F L					
(22.2005)	E/W Departure: F L 2469.20' FWL			E/W I	Departure:		F	L	E/W Departure: F L E/W Departure: F L			L			
Lambert X- Y coordinates	1950789 20			X:			è	X: X: X: X:							
	y: 9473059.10			Y:				Y: Y: Y:							
Latitude/ Longitude				Latitude			58	Latitude Latitude Latitude							
	Longitude -92.0	53925	50		Longitude				Longitude Longitude Longitude						
Water Depth (I 6825'	Feet):				MD (D (Feet): TVD (Feet):				(Feet):			(Feet):		
Anchor Radius	(if applicat	ole) in feet:			N/A			13	(Feet): (Feet):			(Feet):			
Anchor Lo	cations fo	r Drillin	g Rig or Cor	nstruc	tion E	Barge (If and	hor radius	supplied	above	e, not	necessa	ry)			
Anchor Name	7	Block	X Coordinat			Y Coordina						- C1-20	in on Sea	floor	
			X =			Y =									
			X =			Y =									
			X =		Y =										
			X =			Y=									
			X =			Y =									
			X =			Y =									
			X =			Y =									
			X =			Y =			ē.						

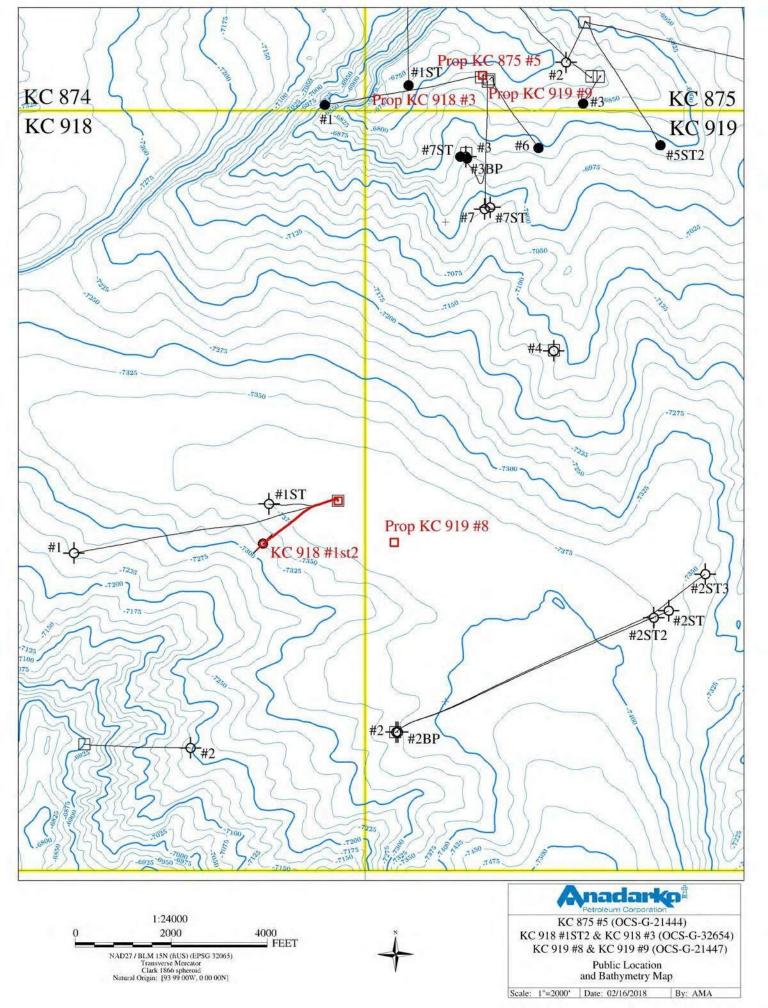

KC 875, KC 918 & KC 919 Public Locations

Well Name	Location	Foot	tages	X (ft)	Y (ft)	Latitude	Longitude	Water Depth
KC 875 #5	SFL KC 875	739.10 FSL	2469.20 FWL	1950789.20	9473059.10	26.1041117	-92.0539250	6825'
KC 918 #1 ST 2	SFL KC 918	7705.89 FSL	534.51 FEL	1947785.493	9464185.895	26.0797521	-92.0632743	7381'
KC 918 #3	SFL KC 875	739.10 FSL	2469.20 FWL	1950789.20	9473059.10	26.1041117	-92.0539250	6825'
KC 919 #8	SFL KC 919	6840 FSL	632 FWL	1948952.00	9463320.00	26.077346	-92.059739	7393'
KC 919 #9	SFL KC 875	739.10 FSL	2469.20 FWL	1950789.20	9473059.10	26.1041117	-92.0539250	6825'

B GENERAL INFORMATION

(a) Applications and Permits

Prior to beginning development operations in Keathley Canyon Blocks 875, 918, and 919, the following applications will be submitted for approval.

Application/Permit	Issuing Agency	Status
Surface Commingling Application	BSEE	To be submitted
Lease Term Pipeline Applications	BSEE	To be submitted
Deepwater Operations Plan	BOEM	To be submitted
Conservation Information Document	BOEM	To be submitted

(b) Drilling Fluids

Not applicable as wells will not be drilled under this plan.

(c) Production

The following table provides information about each type of anticipated production from the wells covered under this plan:

Discussions regarding geologic information are considered proprietary and have been omitted from this section of the public copy DOCD.

(d) Oil Characteristics

A table summarizing the chemical and physical characteristics of the oils that will be produced, handled, transported or stored is required per NTL 2008-G04 when operators propose one of the following activities:

- "(1) Activities for which the State of Florida is an affected State.
- (2) Activities within the Protective Zones of the Flower Garden Banks and Stetson Bank.
- (3) To install a surface facility located in water depths greater than 400 meters (1,312 feet), or a surface facility in any water depth that supports a subsea development in water depths greater than 400 meters (1,312 feet)."

Anadarko does not propose any of these three activities under this plan, therefore the oil characteristics tables required by NTL 2008-G04 are not applicable.

(e) New or Unusual Technology

Anadarko does not propose to use any new or unusual technology to develop the well proposed in this plan. Best available and safest technologies as referenced in 30 CFR 250 will be incorporated as standard operational procedure.

(f) Bonding Statement

The bond requirements for the activities and facilities proposed in this DOCD are satisfied by an area-wide bond furnished and maintained according to 30 CFR part 256, subpart I; NTL No. 2015-N04, "General Financial Assurance," and National NTL No. 2016-N01 "Requiring Additional Security".

(g) Oil Spill Financial Responsibility (OSFR)

Anadarko Petroleum Corporation (Company Number 00981) has demonstrated oil spill financial responsibility for the facilities proposed in this DOCD according to 30 CFR Part 254, and NTL No. 2008-N05, "Guidelines for Oil Spill Financial Responsibility for Covered Facilities".

(h) Deepwater Well Control Statement

Anadarko Petroleum Corporation (Company Number 00981) has the financial capability to drill a relief well and conduct other emergency well control operations if required.

(i) Suspensions of Production

Should a suspension of production become necessary to hold this lease, an application will be submitted to BOEM in accordance with NTL 2000-G17.

(j) Blowout Scenario

The worst-case discharge scenario for this project is defined as an uncontrollable discharge to the seafloor during production operations. The scenario assumes that the wellhead fails mechanically and a blowout occurs at the seafloor, allowing the entire wellbore fluid to flow up the existing production string.

Anadarko prepared a drilling blowout scenario pursuant to guidance provided in NTL No. 2015-N01 under previously approved Exploration Plans (Plan Control No. S-7570 and S-7757) for the subject area. Additionally, a production blowout scenario was previously approved under the Initial Development Plan for the Lucius Project (Plan Control No. N-9664).

The previously approved Keathley Canyon 875 #001 ST01 well (Plan Control No. N-9664) is addressed in this blowout scenario since it is the proposed location with the highest potential production worst case discharge (WCD) in the Lucius project area. A similar approach would be taken in the event of a blowout for the wells requested under this plan. Based on NTL No. 2015-N01 guidance, the maximum hydrocarbon discharge for Keathley Canyon 875 #001 ST01 (KC 875 #1 ST01) well during a production scenario was calculated to be **35,000 BOPD**.

A calculation was made to determine the worst case discharge (WCD) if a producing (completed) well failed at the subsea wellhead. This WCD applies to blocks KC 874, 875, 918,

and 919. The evaluated sand has the highest net pay and permeability, and has been determined as the reservoir with the highest WCD potential for the wells covered by this plan. The reservoir lies on all the blocks, and all existing and proposed wells in the subject area could be completed in the same sand. The WCD calculation was made using the Prosper software. The model was based on the KC 875 #1 ST01 well which has been completed and flow tested. All wells that are expected to penetrate the objective sand are expected to be completed in a manner similar to the KC 875 #1 ST01. The skin for the WCD sand was set to 0 (although this well had much higher skin) and the pressure and temperature at the subsea wellhead were assumed to be seafloor conditions. A WCD of 33,128 BOPD was calculated with **31 deg API gravity**. This WCD will be rounded up to an estimated WCD of 35,000 BOPD.

Should a blowout occur, the formation types present in the GOM tend to bridge over in most cases. Additional well intervention and time requirements to drill a relief well pursuant to guidance provided in NTL No. 2015-N01 were discussed under previously approved Exploration Plans (Plan Control No. S-7570 and S-7757). The following scenario summarizes the time taken to mobilize a rig and drill a relief well as discussed under these previously approved Plans:

An estimate of 7-21 days is required to suspend operations on a deepwater GOM well and begin drilling the relief well. This assumes 0-14 days to suspend current operations on an existing well and 7 days to mobilize and be ready to spud the relief well. The estimated time to drill the relief well is 55 days for an estimated total of 62-76 days from time of blowout to finishing the relief well.

The drilling days were based on actual days required to drill the KC 875 #1, KC875 #1 ST, and KC 875 #2 wells through the objective (interval of WCD) with additional time added for ranging.

The time estimate provided for the plan well is inclusive of 'both' drilling 'and' completion operations. As a completion is not typically part of relief well operations no time has been included for completion operations in the relief well estimate. Therefore the estimated time for a relief well should be less than for the plan well. In addition, information and learning from the drilling of the original well may provide opportunities to optimize drilling performance for relief well operations and thus reduce the required drilling time.

The maximum total volume during a blowout could potentially be **2,660,000 bbls** assuming 76 days for the maximum duration of a blowout, multiplied by the worst case daily uncontrolled blowout volume of 35,000 bbl.

k) Chemical Products

Per NTL No. 2008-G04, information regarding chemical products is not required to accompany this plan.

GEOLOGICAL AND GEOPHYSICAL INFORMATION

(a) Geological Description

Discussions regarding geologic information are considered proprietary and have been omitted from this section of the public copy DOCD.

(b) Structure Contour Maps

Current structure maps drawn to the top of each productive hydrocarbon sand showing the entire lease blocks, the surface location of each well and locations of geological cross-sections, are enclosed as Attachment C-1.

(c) Interpreted 2-D and/or 3-D Seismic Lines

Interpreted 2-D and/or 3-D Seismic Lines were previously included with the EP, and therefore not required per NTL 2008-G04.

(d) Geological Structure Cross-Sections

Interpreted geological structure cross-sections showing the location, depth, and expected productive formations of each proposed well are enclosed as Attachment C-2.

(e) Shallow Hazards Report

A Shallow Hazards Report was previously submitted to BOEM with the EP, and therefore not required per NTL 2008-G04.

(f) Shallow Hazards Assessment

A shallow hazards site clearance letter for the proposed well locations was previously submitted to BOEM under EP's, and therefore not required per NTL 2008-G04.

(g) High-resolution Seismic Lines

High resolution seismic lines are not required per NTL No. 2008-G04.

(h) Stratigraphic Column

A generalized stratigraphic column is not required per NTL No. 2008-G04.

(i) Time Vs. Depth Tables

The proposed activities under this DOCD are not considered to be in areas where there is no well control. Therefore, a seismic travel time versus depth table is not required per NTL No. 2008-G04.

D HYDROGEN SULFIDE INFORMATION

In accordance with Title 30 CFR 250.490(c), Keathley Canyon Blocks 875, 918, and 919 were classified as H2S absent under previously approved initial and supplemental Exploration Plans.

Mineral Resource Conservation Information

(a) Technology & Reservoir Engineering Practices and Procedures

Anadarko does not plan to use enhanced recovery methods for development of these blocks. The reservoirs are pressure supported by natural water drive and standard production will afford efficient reserve recovery.

(b) Technology and Recovery Practices and Procedures

The wells will be completed as conventional completions. As applicable, the wells will be frac packed/gravel packed to maximize recovery.

(c) Reservoir Development

The wells will be monitored for performance and assessed for reservoir depletion to ensure recovery. Additional development drilling will be taken into account to ensure maximum recovery.

BIOLOGICAL, PHYSICAL, AND SOCIOECONOMIC INFORMATION

(a) Chemosynthetic Communities Report

Not applicable as wells have been and/or will be drilled and completed under an approved Exploration Plan. Chemosynthetic information for the proposed lease term pipelines will be submitted with the pipeline application.

Analysis

No drilling will be conducted under this plan. Drilling at the proposed locations was approved under previous Plan Control No.'s N-9593, N-9623, S-7848, S-7882, and R-6450. Drilling was approved because features or areas that could support high-density chemosynthetic communities would not be located within 2,000 feet of the proposed muds and cuttings discharge location.

Features or areas that could support high-density chemosynthetic communities are not located within 250 feet of any seafloor disturbances.

(b) Topographic Features Map

The proposed activities are not within 1,000 feet of a no-activity zone or within the 3-mile radius zone of an identified topographic feature. Therefore, no map is required per NTL No. 2008-G04.

(c) Topographic Features Statement (Shunting)

Anadarko does not plan to drill more than two wells from the same surface location within the Protective Zone of an identified topographic feature. Therefore, the topographic features statement required by NTL No. 2008-G04 is not applicable.

(d) Live Bottoms (Pinnacle Trend) Map

The activities proposed in this plan are not within 200 feet of any pinnacle trend feature with vertical relief equal to or greater than 8 feet. Therefore, no map is required per NTL No. 2008-G04.

(e) Live Bottoms (Low Relief) Map

The activities proposed in this plan are not within 100 feet of any live bottom low relief features. Therefore, no map is required per NTL No. 2008-G04.

(f) Potentially Sensitive Biological Features

The activities proposed in this plan are not within 200 feet of any potentially sensitive biological features. Therefore, no map is required per NTL No. 2008-G04.

(g) Threatened and Endangered Species Information

Under Section 7 of the Endangered Species Act (ESA) all federal agencies must ensure that any actions they authorize, fund, or carry out are not likely to jeopardize the continued existence of a listed species, or destroy or adversely modify its designated critical habitat.

In accordance with the 30 CFR 250, Subpart B, effective May 14, 2007, and further outlined in Notice to Lessees (NTL) 2008-G04, lessees/operators are required to address site-specific information on the presence of federally listed threatened or endangered species and critical habitat designated under the ESA and marine mammals protected under the Marine Mammal Protection Act (MMPA) in the area of proposes activities under this plan.

Currently there are no designated critical habitats for the listed species in the Gulf of Mexico Outer Continental Shelf; however, it is possible that one or more of these species could be seen in the area of our operations.

The following table reflects the Federally-listed endangered and threatened species in the lease area and along the northern Gulf coast:

Si	Caiantic Name	Ctatus	Potential F	resence	Critical Habitat
Species	Scientific Name	Status	Lease Area	Coastal	Designated in Gulf of Mexico
Marine Mammals					
Sperm whale	Physeter macrocephalus	Е	X	(FIRE	None
West Indian manatee	Trichechus manatus ^a	Е	(==)	X	Florida (Peninsular)
Sea Turtles				,,	
Loggerhead turtle	Caretta caretta	T, E ^b	X	X	Nesting beaches and nearshore reproductive habitat in Mississippi, Alabama, and Florida (Panhandle); Sargassum habitat including most of the central and western Gulf of Mexico
Green turtle	Chelonia mydas	T, E ^c	X	X	None
Leatherback turtle	Dermochelys coriacea	Е	X	X	None
Hawksbill turtle	Eretmochelys imbricata	Е	X	X	None
Kemp's ridley turtle	Lepidochelys kempii	Е	X	X	None
Birds					
Piping Plover	Charadrius melodus	Т	-	X	Coastal Texas, Louisiana, Mississippi, Alabama, and Florida (Panhandle)
Whooping Crane	Grus americana	Е	(2 <u>00</u> 0)	X	Coastal Texas (Aransas National Wildlife Refuge)
Fishes					
Gulf sturgeon	Acipenser oxyrinchus desotoi	Т	0220	X	Coastal Louisiana, Mississippi, Alabama, and Florida (Panhandle)
Invertebrates					
Elkhorn coral	Acropora palmata	Т	122	X	The Florida Keys and the Dry Tortugas
Lobed star coral	Orbicella annularis	Т	3==3	X	None
Mountainous star coral	Orbicella faveolata	Т	15 115 0	X	None
Boulder star coral	Orbicella franksi	T	:==:	X	None
Terrestrial Mammals					
Beach mice (subspecies: Alabama, Choctawhatchee, Perdido Key, St. Andrew)	Peromyscus polionotus	Е	(***)	X	Alabama and Florida (Panhandle) beaches

Abbreviations: E = endangered; T = threatened.

The Environmental Impact Analysis in Section P of this plan further discusses potential impacts and mitigation measures related to threatened and endangered species.

^a There are two subspecies of West Indian manatee: the Florida manatee (*T. m. latirostris*), which ranges from the northern Gulf of Mexico to Virginia, and the Antillean manatee (*T. m. manatus*), which ranges from northern Mexico to eastern Brazil. Only the Florida manatee subspecies is likely to be found in the northern Gulf of Mexico.

b The loggerhead turtle is composed of nine distinct population segments (DPSs) that are considered "species." The only DPS that may occur in the project area (Northwest Atlantic DPS) is listed as threatened (76 FR 58868; 22 September 2011).

^c The green sea turtle is threatened, except for the Florida breeding population, which is listed as endangered.

(h) Archaeological Report

Keathley Canyon Blocks 875, 918, & 919 are not located in an area designated as having high archaeological potential, and as such, an Archaeological Report is not required per NTL No. 2011-JOINT-G01. However an Archaeological Report was prepared by Fugro Geoservices, Inc. covering Keathley Canyon Blocks 875 and 919 and was previously submitted to BOEM on December 20, 2011 attached to Plan Control No. N-9593 and N-9428. Additionally, an Archaeological report was submitted by Exxon covering Keathley Canyon Block 918 with Plan Control No. N-9623. The surveys were conducted in accordance with the latest guidelines established by the BOEMRE in 2011.

(i) Air and Water Quality Information

This DOCD does not propose activities for which the State of Florida is an affected State. Therefore, the discussion required per NTL 2008-G04 is not applicable to this DOCD.

(j) Socioeconomic Information

The activities proposed in this plan are not located offshore Florida. Therefore, socioeconomic information required per NTL 2008-G04 is not applicable to this DOCD.

G WASTE AND DISCHARGE INFORMATION

The following estimates were prepared utilizing Anadarko's experience with similar operations. Estimated maximum discharge rates are reflected below. Projected amounts may vary during the course of operations.

(a) Projected Generated Wastes

Type of Waste	Composition	Projected Amount	Treatment/Storage/Disposal
Synthetic-based drilling fluids	Synthetic-based drilling muds	N/A	Re-use and/or transport to shore in DOT approved containers to an approved waste disposal facility, such as in Fourchon, Louisiana, and on to base/transfer station. If recycled, returned to vendor (Bariod or MI).
Cuttings wetted with synthetic-based fluids	Cuttings coated with synthetic drilling muds/fluids, including drilled out cement	N/A	Treated and discharge overboard *Note, an estimated 5-10% of cuttings may be transported to shore in tanks and/or cutting boxes and on to the base/transfer station if oil still remains.
Water-based drilling fluids	Water based drilling muds (NaCl saturated, seawater, freshwater, barite)	N/A	Discharge overboard or at seafloor
Cuttings wetted with water-based fluids	Cuttings coated with water-based drilling muds/fluids	N/A	Discharge overboard
Chemical product waste (well treatment fluids)	Ethylene glycol Methanol Xylene* Diesel*	376.29 bbls total 93.79 bbls total 1,883.7 bbls total 250 bbls total/year	Transport to shore in DOT approved containers to an approved waste disposal facility, such as Fourchon, Louisiana and on to Ecoserv Base. *Note, on average an estimated 5-10% of product total volume used during well treatment ops is sent back to shore for disposal. Volume shown reflects volume to be disposed of
Completion/Recompletion Fluids	Brine, spent acid, prop sand, debris, gelled fluids, dead oil	3,000 bbls/well	Transport to shore in DOT approved containers to an approved waste disposal facility, such as Fourchon, Louisiana and on to Ecosery Base.
Non-pollutant completion fluids	Low density uninhibited completion brines	5,000 bbls/well	Discharge overboard
Workover fluids/ Stim fluids	Brine, spent acid, prop sand, debris, gelled fluids, dead oil	3,000 bbls/well	Transport to shore in DOT approved containers to an approved waste disposal facility, such as Fourchon, Louisiana and on to Ecosery Base.

Trash and debris	Refuse generated during operations	60,000 lbs total	Transport to shore in disposal bags by vessel to shorebase for pickup by municipal operations.
*Sanitary Wastes	Treated human body waste	10,961 bbls total	Chlorinate and discharge overboard
*Domestic Waste	Gray water	20,340 bbls total	Chlorinate and discharge overboard
Deck drainage	Platform washings and rainwater	283 bbls total	Treat for oil and grease and discharge overboard
Subsea production control fluid	Subsea production control fluid for actuating valves	375 bbls/well during commissioning and start-up. 12 bbl/well/year average during normal operations	Discharge at seafloor
Produced water	Formation water	339,000 bbls/well	Treat through flotation unit and discharge overboard
Desalinization Unit	Seawater	11,300 bbls total	Discharge overboard
Wash water	Drill water (fresh)	n/a	Discharge overboard
Blowout preventer fluid	Blend (3% Stack Magic & Filtered Fresh Water)	7,400 gals total	Discharge at seafloor
Ballast water	Seawater	As needed	Discharge overboard
Bilge water	Seawater	1,187 bbls total	Discharge overboard through 15 ppm equipment
Excess cement at the seafloor	Nitrified cement slurry	n/a	Discharge at seafloor
Fire water	Seawater	8,050,958 bbls/month	Discharge overboard
Cooling water	Seawater	8,050,958 bbls/month	Discharge overboard
Produced Sand	Oil-contaminated formation Sand	50 bbls/well/year	Transport to shore in DOT approved containers to an approved waste disposal facility, such as Newpark (injection disposal facility) or USLL (landfarm).
Used oil	Excess oil from engines	300 bbls total	Transport in DOT approved containers to shore for recycling

NOTE: Total amounts assume operations associated with 5 wells will take 113 days total to complete

(b) Projected Ocean Discharges

Type of Waste	Total Amount to be	Discharge Rate	Discharge Method
	Discharged		
*Sanitary Wastes	10,961 bbls total	97 bbls/well/day	Chlorinate and discharge overboard
*Domestic waste	20,340 bbls total	180 bbls/well/day	Chlorinate and discharge overboard
Deck drainage	283 bbls total	2.5 bbls/well/day	Treat for oil and grease and discharge overboard
Desalinization Unit	11,300 bbls total	100 bbls/well/day	Discharge overboard
Wash water	N/A	N/A	Discharge overboard
Blowout preventer fluid	7,400 gals total	925 gals/week/well; Vents on a weekly	Discharge at seafloor

		basis (during completion ops only- total of 56 days)	
Ballast water	As needed	Not continuous	Discharge overboard
Bilge water	1,187 bbls	315 bbls/month	Discharge overboard through 15 ppm equipment
Excess cement at the seafloor	N/A	N/A	Discharge at seafloor
Fire water	30,325,245 bbls/total	8,050,958 bbls/month	Discharge overboard
Cooling water	30,325,245 bbls/total	8,050,958 bbls/month	Discharge overboard
Cuttings wetted with Water-based fluids	N/A	1,000 bbls/hr max	Discharge overboard
Water-based drilling fluids	N/A	1,000 bbls/hr max	Discharge at seafloor or overboard
Cuttings wetted with Synthetic-based fluids	N/A	NA	Treated and discharge overboard *Note, an estimated 5-10% of cuttings may be transported to shore in tanks and/or cutting boxes and on to the base/transfer station if oil still remains.
Subsea production control fluid	375 bbls/well during commissioning and start-up. 12 bbl/well/year average during normal operations	5 bbl/well/day during commissioning and start-up. 1 bbl/well/month average during normal operations	Discharge at seafloor
Produced Water	339,000 bbls	3,000 bbls/well/day	Treat through flotation unit and discharge overboard
Non-pollutant completion fluids	25,000 bbls	100 bbl/hour	Discharge overboard

NOTE: Total amounts assume operations associated with 5 wells will take 113 days total to complete

(c) Modeling Report

The proposed activities under this plan do not meet the U.S. Environmental Protection Agency requirements for an individual NPDES permit. Therefore, modeling report requirements per NTL No. 2008-G04 is not applicable to this DOCD.

H AIR EMISSIONS INFORMATION

(a) Screening Questions

Screen Procedures for DOCD's	Yes	No
Is any calculated Complex Total (CT) Emission amount (tons) associated with your proposed development activities more than 90% of the amounts calculated using the following formulas: $CT = 3400D^{2/3}$ for CO, and $CT = 33.3D$ for the other air pollutants (where $D = distance$ to shore in miles)?		X
Do your emission calculations include any emission reduction measures or modified emission factors?	X	
Does or will the facility complex associated with your proposed development and production activities process production from eight or more wells?	X	
Do you expect to encounter H ₂ S at concentrations greater than 20 parts per million (ppm)?		X
Do you propose to flare or vent natural gas in excess of the criteria set forth under 250.1105(a)(2) and (3)?		X
Do you propose to burn produced hydrocarbon liquids?		X
Are your proposed development and production activities located within 25 miles from shore?		X
Are your proposed development and production activities located within 200 kilometers of the Breton Wilderness Area?		X

(b) Air Emissions Spreadsheets

Air emission worksheets have been prepared utilizing the maximum horsepower rating from an Anadarko contracted DP Vessel. A different vessel may be utilized, but the horsepower rating, average engine load, and air emissions will be equal to, or less than, the calculated plan emission amounts shown on the following pages. Air Emission Spreadsheets have been prepared and are enclosed as **Attachment H-1.** The complex total emission amounts include previously approved production air emissions from Supplemental DOCD Control No. S-7841.

(c) Summary Information

Keathley Canyon Block 875 Surface Location Activities:

Air Pollutant	Plan Emission Amounts ¹ (tons)	Calculated Exemption Amounts ² (tons)	Calculated Complex Total Emission Amounts ³ (tons)
Particulate matter (PM)	10.05	7092.90	34.4
Sulphur dioxide (SO ₂)	46.12	7092.90	139.02
Nitrogen oxides (NO _x)	345.62	7092.90	2845.94
Volatile organic compounds (VOC)	10.37	7092.90	5194.57
Carbon monoxide (CO)	75.41	121264.03	1087.24

Keathley Canyon Block 918 Surface Location Activities:

Air Pollutant	Plan Emission Amounts ¹ (tons)	Calculated Exemption Amounts ² (tons)	Calculated Complex Total Emission Amounts ³ (tons)
Particulate matter (PM)	35.04	7092.90	N/A
Sulphur dioxide (SO ₂)	160.75	7092.90	N/A
Nitrogen oxides (NO _x)	1206.54	7092.90	N/A
Volatile organic compounds (VOC)	37.94	7092.90	N/A
Carbon monoxide (CO)	274.43	121264.03	N/A

Keathley Canyon Block 919 Surface Location Activities:

Air Pollutant	Plan Emission	Calculated Exemption	Calculated Complex Total
	Amounts ¹ (tons)	Amounts ² (tons)	Emission Amounts ³ (tons)
Particulate matter (PM)	0.51	7092.90	N/A
Sulphur dioxide (SO ₂)	2.33	7092.90	N/A
Nitrogen oxides (NO _x)	17.44	7092.90	N/A
Volatile organic compounds (VOC)	0.52	7092.90	N/A
Carbon monoxide (CO)	3.81	121264.03	N/A

The air emission calculations were calculated by:

Jill Fowler Regulatory Analyst (832) 636-1554 jill.fowler@anadarko.com

EXPLORATION PLAN (EP) AIR QUALITY SCREENING CHECKLIST

OMB Control No. 1010-0049

AIR QUALITY SCREENING CHECKLIST	OMB Approval Expires: September 30, 2003
Anadarko Petroleum Corporation	
Keathley Canyon	
875	
OCS-G 21444 (surface)	
Lucius Spar	
KC 875 #005, KC 918 #003, and KC 919 #009 (reflects wells with SL in KC 875 only)	
III Fourier	
832-636-1554	
KC 875 Surface Plan Totals: place five wells on production , install three pipeline jumpers, and a	a new pipeline and umbilical.
	Anadarko Petroleum Corporation Keathley Canyon 875 OCS-G 21444 (surface)

LEASE TE	LEASE TERM PIPELINE CONSTRUCTION INFORMATION:						
YEAR	NUMBER OF	TOTAL NUMBER OF CONSTRUCTION DAYS					
	PIPELINES						
2015							
2016							
2017							
2018							
2019							
2020							
2021							

AIR EMISSIONS CUMPUTATION FACTORS

Fuel Usage Conversion Factors	Natural Gas Turbines		Natural Gas Engines		Diesel Recip. Engine		REF.	DATE
-	SCF/hp-hr	9.524	SCF/hp-hr	7.143	GAL/hp-hr	0.0483	AP42 3.2-1	4/76 & 8/84
Equipment/Emission Factors	units	PM	SOx	NOx	VOC	CO	REF.	DATE
NG Turbines	gms/hp-hr		0.00247	1.3	0.01	0.83	AP42 3.2-1& 3.1-1	10/96
NG 2-cycle lean	gms/hp-hr		0.00185	10.9	0.43	1.5	AP42 3.2-1	10/96
NG 4-cycle lean	gms/hp-hr		0.00185	11.8	0.72	1.6	AP42 3.2-1	10/96
NG 4-cycle rich	gms/hp-hr		0.00185	10	0.14	8.6	AP42 3.2-1	10/96
Diesel Recip. < 600 hp.	gms/hp-hr	1	0.005505	14	1.12	3.03	AP42 3.3-1	10/96
Diesel Recip. > 600 hp.	gms/hp-hr	0.32	1.468	11	0.33	2.4	AP42 3.4-1	10/96
Diesel Boiler	lbs/bbl	0.084	0.009075	0.84	0.008	0.21	AP42 1.3-12,14	9/98
Diesel Marine Tier II	g/kw*hr			9.7				
NG Heaters/Boilers/Burners	lbs/mmscf	7.6	0.593	100	5.5	84	P42 1.4-1, 14-2, & 14	7/98
NG Flares	lbs/mmscf		0.593	71.4	60.3	388.5	AP42 11.5-1	9/91
Liquid Flaring	lbs/bbl	0.42	6.83	2	0.01	0.21	AP42 1.3-1 & 1.3-3	9/98
Tank Vapors	lbs/bbl				0.03		E&P Forum	1/93
Fugitives	lbs/hr/comp.				0.0005		API Study	12/93
Glycol Dehydrator Vent	lbs/mmscf				6.6		La. DEQ	1991
Gas Venting	lbs/scf				0.0034			

Sulphur Content Source	Value	Units
Fuel Gas	3.33	ppm
Diesel Fuel	0.0015	% weight
Produced Gas(Flares)	3.33	ppm
Produced Oil (Liquid Flaring)	1	% weight

COMPANY	AREA	BLOCK	LEASE		PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Anadarko Petroleum Corpo	Keathley Canyon	875	OCS-G 21444 (surf	ace)	Lucius Spar	KC 875 #005	, KC 918 #003	, and KC 919	Jill Fowler		832-636-155	#REF!					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	Average	ACT. FUEL	RUN	TIME		MAXIMUM	POUNDS	PER HOUR			EST	IMATED TO	ONS	
	Diesel Engines	HP	GAL/HR	Engine Load	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	%	SCF/D												T.
	Burners	MMBTU/HR	SCF/HR		SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	CO	PM	SOx	NOx	VOC	СО
PL INSTALLATION	PRIME MOVER>600hp diesel	0	0	40%	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ROV Boat	PRIME MOVER>600hp diesel	12000	579.6	100%	13910.40	24	5	8.46	38.80	290.75	8.72	63.44	0.51	2.33	17.44	0.52	3.81
Section (A) Estate distribution	PRIME MOVER>600hp diesel	0	0	40%	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Production	Pigging Pump	1110	53.613		1286.71			0.78	3.59	26.89	0.81	5.87	0.00	0.00	0.00	0.00	0.00
	Pigging Pump	1110	53.613		1286.71			0.78	3.59	26.89	0.81	5.87	0.00	0.00	0.00	0.00	0.00
	Firewater Pump	1000	48.3		1159.20			0.70	3.23	24.23	0.73	5.29	0.00	0.00	0.00	0.00	0.00
	Firewater Pump	1000	48.3		1159.20			0.70	3.23	24.23	0.73	5.29	0.00	0.00	0.00	0.00	0.00
	Air Compressor	83	4.0089		96.21			0.18	0.27	2.56	0.20	0.55	0.00	0.00	0.00	0.00	0.00
	Crane	746	36.0318		864.76			0.53	2.41	18.07	0.54	3.94	0.00	0.00	0.00	0.00	0.00
	Crane	746	36.0318		864.76			0.53	2.41	18.07	0.54	3.94	0.00	0.00	0.00	0.00	0.00
	Survival Craft	20	0.966		23.18			0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.00	0.00	0.00
I	Survival Craft	20	0.966		23.18			0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.00	0.00	0.00
	Rescue Boat	160	7.728		185.47			0.35	0.52	4.93	0.39	1.07	0.00	0.00	0.00	0.00	0.00
	Amine Reboiler	24	22857.14286		548571.43			0.17	0.01	2.29	0.13	1.92	0.00	0.00	0.00	0.00	0.00
	Emergency Generator	1333	64.3839		1545.21		1	0.94	4.31	32.30	0.97	7.05	0.00	0.00	0.00	0.00	0.00
	Aux Generator	2183	105.4389		2530.53			1.54	7.06	52.89	1.59	11.54	0.00	0.00	0.00	0.00	0.00
	Turbine Gen Nat Gas	10085	96049.54		2305188.96			PACE 8	0.05	28.88	0.22	18.44	(30033)	0.00	0.00	0.00	0.00
	Turbine Gen Nat Gas	10085	96049.54		2305188.96				0.05	28.88	0.22	18.44		0.00	0.00	0.00	0.00
	Turbine Gen Nat Gas	10085	96049.54		2305188.96				0.05	28.88	0.22	18.44		0.00	0.00	0.00	0.00
	Turbine Compressor Nat Gas	10311	98201.964		2356847.14				0.06	29.52	0.23	18.85		0.00	0.00	0.00	0.00
	Turbine Compressor Nat Gas	10311	98201.964		2356847.14				0.06	29.52	0.23	18.85		0.00	0.00	0.00	0.00
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52				0.02	123.07	7.51	16.69		0.00	0.00	0.00	0.00
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52				0.02	123.07	7.51	16.69		0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	Supply Boat	14805	715.0815		17161.96			10.44	47.87	358.71	10.76	78.26	0.00	0.00	0.00	0.00	0.00
Wellwork	100 - 100 B		11154114099994400000000					NAME OF THE OWNER OWNER OF THE OWNER OW	20224230004	Suprement.	0.000000000	90 (300)	10000000	10,01700,0000	10000000000	133341.003	10-10-00-00
(CT/Snubbing	PRIME MOVER>600hp diesel	2000	96.6		2318.40			1.41	6.47	48.46	1.45	10.57	0.00	0.00	0.00	0.00	0.00
Unit/Wireline)								33.1.2		30.41.04.5							
SS SUPPORT								10100101011		20222002							
VESSEL	PRIME MOVER>600hp diesel	27493	1327.9119		31869.89			19.38	88.90	666.13	19.98	145.34	0.00	0.00	0.00	0.00	0.00
	MISC.	BPD	SCF/HR	i i	COUNT						•						
	TANKS-Not Routed to VRU	100					T i				0.13	Ï			Ì	0.00	
I	PROCESS FLARE- Routine		1701						0.00	0.12	0.10	0.66		0.00	0.00	0.00	0.00
I	PROCESS FLARE- Upset 450 MM/D		18750000						11.12	1338.75	1130.63	7284.38		0.00	0.00	0.00	0.00
	PROCESS VENT-Routine		1137								3.87					0.00	
	PROCESS VENT-Upset 450 MM/D		18750000								63750.00					0.00	
	PROCESS VENT-Routine (Amine)*	3	145850								495.89					0.00	
	FUGITIVES-				10000.0						5.00					0.00	
	GLYCOL STILL VENT-450 MM/D		18750000								123.75	9				0.00	
Flowback After	OIL BURN	0				0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Completion	GAS FLARE		1000000				0		0.59	71.40	60.30	388.50		0.00	0.00	0.00	0.00
2018	YEAR TOTAL							47.72	224.89	3410.45	65634.78	8158.29	0.51	2.33	17.44	0.52	3.81
		8															
EXEMPTION	DISTANCE FROM LAND IN MILES						***						Individual Community		620000000000000000000000000000000000000	900900000000000000000000000000000000000	
CALCULATION													7092.90	7092.90	7092.90	7092.90	121264.03
	213.0	3															

COMPANY	AREA	BLOCK	LEASE		PLATFORM	WELL	L	I	CONTACT		PHONE	REMARKS	8				
Anadarko Petroleum	Keathley Canyon	875	OCS-G 21444		Lucius Spar	KC 875 #005	, KC 918 #003	and KC 919	Jill Fowler		832-636-155	#REF!					
Corporation OPERATIONS	EQUIPMENT	DATING	(surface)		8		TIME			DOUNDA	PER HOUR		HO.	F07	MATER T	ONO	
OPERATIONS	Diesel Engines	RATING HP	MAX. FUEL GAL/HR	Average	ACT. FUEL GAL/D	RUN	TIME		MAXIMUM	POUNDS	PER HOUR	(-	ESI	IMATED T	UNS	
	Nat. Gas Engines	HP	SCF/HR	Engine Load	SCF/D							-	-				
PL INSTALLATION:	Burners	MMBTU/HR	SCF/HR	%	SCF/D	HR/D	DAYS	PM	SOx	NOx	Voc	со	РМ	SOx	NOx	voc	co
ROV Boat	PRIME MOVER>600hp diesel	12,000	579.6	100%	13910.4	24	10	8.5	38.8	290.7	8.7	63.4	1.0	4.7	34.9	1.0	7.6
Reeled PipeLay Vsl.	PRIME MOVER>600hp diesel	33480	1617.084	100%	38810.0	24	7	23.6	108.3	811.2	24.3	177.0	2.0	9.1	68.1	2.0	14.9
Umbilical Lay Vsl.	PRIME MOVER>600hp diesel	33480	1617.084	100%	38810.0	24	7	23.6	108.3	811.2	24.3	177.0	2.0	9.1	68.1	2.0	14.9
ROV Boat w. Crane	VESSELS>600hp diesel(crew)	12000	579.6		13910.4	24	32	8.5	38.8	290.7	8.7	63.4	3.2	14.9	111.6	3.3	24.4
Supply Boat 1	VESSELS>600hp diesel(crew)	10800	521.64		12519.4	24	10	7.6	34.9	261.7	7.9	57.1	0.9	4.2	31.4	0.9	6.9
Supply Boat 2	VESSELS>600hp diesel(crew)	10800	521.64		12519.4	24	10	7.6	34.9	261.7	7.9	57.1	0.9	4.2	31.4	0.9	6.9
	VESSELS>600hp diesel(supply)		0		0.0		0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	VESSELS>600hp diesel(supply)		0		0.0		0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0 0.0
Deaduction	VESSELS>600hp diesel(supply)	1110			ALCOHOLD STREET	L.	0							THE RESERVE OF THE PERSON NAMED IN COLUMN 1			0.00
Production	Pigging Pump	1110	53.613		1286.71 1286.71			0.78	3.59 3.59	26.89 26.89	0.81	5.87	0.00	0.00	0.00	0.00	0.00
	Pigging Pump Firewater Pump	1110 1000	53.613 48.3		1159.20			0.78 0.70	3.59	24.23	0.81 0.73	5.87 5.29	0.00	0.00	0.00	0.00	0.00
	Firewater Pump	1000	48.3		1159.20			0.70	3.23	24.23	0.73	5.29	0.00	0.00	0.00	0.00	0.00
I	Air Compressor	83	4 0089		96.21			0.70	0.27	2.56	0.73	0.55	0.00	0.00	0.00	0.00	0.00
I	Crane	746	36.0318		864.76			0.53	2.41	18.07	0.54	3.94	0.00	0.00	0.00	0.00	0.00
	Crane	746	36.0318		864.76			0.53	2.41	18.07	0.54	3.94	0.00	0.00	0.00	0.00	0.00
	Survival Craft	20	0.966		23.18			0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.00	0.00	0.00
	Survival Craft	20	0.966		23.18			0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.00	0.00	0.00
	Rescue Boat	160	7.728		185.47			0.35	0.52	4.93	0.39	1.07	0.00	0.00	0.00	0.00	0.00
	Amine Reboiler	24	22857.14286		548571.43			0.17	0.01	2.29	0.13	1.92	0.00	0.00	0.00	0.00	0.00
l	Emergency Generator	1333	64.3839		1545.21			0.94	4.31	32.30	0.97	7.05	0.00	0.00	0.00	0.00	0.00
	Aux Generator	2183	105.4389		2530.53			1.54	7.06	52.89	1.59	11.54	0.00	0.00	0.00	0.00	0.00
	Turbine Gen Nat Gas	10085	96049.54		2305188.96				0.05	28.88	0.22	18.44		0.00	0.00	0.00	0.00
	Turbine Gen Nat Gas	10085	96049.54		2305188.96				0.05	28.88	0.22	18.44		0.00	0.00	0.00	0.00
	Turbine Gen Nat Gas	10085 10311	96049.54		2305188.96 2356847.14				0.05	28.88 29.52	0.22	18.44		0.00	0.00	0.00	0.00
	Turbine Compressor Nat Gas Turbine Compressor Nat Gas	10311	98201.964 98201.964		2356847.14				0.06	29.52	0.23	18.85 18.85		0.00	0.00	0.00	0.00
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52				0.00	123.07	7.51	16.69		0.00	0.00	0.00	0.00
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52				0.02	123.07	7.51	16.69		0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.02	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
77	WHRU Burner Nat gas	17	16190.47619		388571.43			0.12	0.01	1.62	0.09	1.36	0.00	0.00	0.00	0.00	0.00
	Supply Boat	14805	715.0815		17161.96			10.44	47.87	358.71	10.76	78.26	0.00	0.00	0.00	0.00	0.00
Wellwork (CT/Snubbing					001010							40.57	0.00	0.00		0.00	0.00
Unit/Wireline)	PRIME MOVER>600hp diesel	2000	96.6		2318.40			1.41	6.47	48.46	1.45	10.57	0.00	0.00	0.00	0.00	0.00
SS SUPPORT VESSEL	PRIME MOVER>600hp diesel	27493	1327.9119		31869.89			19.38	88.90	666.13	19.98	145.34	0.00	0.00	0.00	0.00	0.00
	MISC.	BPD	SCF/HR		COUNT												
	TANKS-Not Routed to VRU	100	1701						0.00	0.40	0.13			0.00		0.00	0.00
l	PROCESS FLARE- Routine		1701						0.00	0.12	0.10	0.66		0.00	0.00	0.00	0.00
l	PROCESS FLARE- Upset 450 MM/D		18750000						11.12	1338.75	1130.63	7284.38		0.00	0.00	0.00	0.00
	PROCESS VENT-Routine PROCESS VENT-Upset 450 MM/D		1137 18750000								3.87 63750.00					0.00 0.00	
	PROCESS VENT-Opset 450 MIM/D		145850								495.89					0.00	
	FUGITIVES-		143030		10000.0						5.00					0.00	
	GLYCOL STILL VENT-450 MM/D		18750000		10000.0						123.75					0.00	
Flowback After	OIL BURN	0				0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Completion	GAS FLARE		1000000				0		0.59	71.40	60.30	388.50		0.00	0.00	0.00	0.00
						0											
2019	YEAR TOTAL				-			118.60	550.05	5846.93	65707.88	8689.88	10.05	46.12	345.62	10.37	75.41
EXEMPTION	DISTANCE FROM LAND IN MILES									1			7000.00	7000.00	7000.00	7000.00	404004.00
CALCULATION	213.0												7092.90	7092.90	7092.90	7092.90	121264.03
		•		ļ.	le:												

SUMMARY

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL
Anadarko Petrol	Keathley Canyon	875	OCS-G 21444 (surface	KC 875 #005, KC 918	
		Emitted		Substance	
Year	: :	 	 		
	PM	SOx	NOx	VOC	CO
2018	0.51	2.33	17.44	0.52	3.81
2019	10.05	46.12	345.62	10.37	75.41
Allowable	7092.90	7092.90	7092.90	7092.90	121264.03

EXPLORATION PLAN (EP)	
AIR QUALITY SCREENING CHECKLIS	Т

OMB Control No. 1010-0049

	AIR QUALITY SCREENING CHECKLIST OMB Approval	Expires: September 30, 200
COMPANY	Anadarko Petroleum Corporation	
AREA	Keathley Canyon	
BLOCK	875	
LEASE	OCS-G 21444 (surface)	1
PLATFORM	Lucius Spar	
WELLS	KC 875 #005, KC 918 #003, and KC 919 #009 (reflects wells with SL in KC 875 only)	
COMPANY CONTACT	Jill Fowler	
TELEPHONE NO.	832-636-1554	
	KC 875 Surface Complex Totals: Lucius Spar production (as last approved under S-7841) combined with placing five	e wells on production ,
REMARKS	installation of three pipeline jumpers, and a new pipeline and umbilical.	

LEASE TE	EASE TERM PIPELINE CONSTRUCTION INFORMATION:										
YEAR	NUMBER OF PIPELINES	TOTAL NUMBER OF CONSTRUCTION DAYS									
2015											
2016											
2017											
2018											
2019											
2020											
2021											

AIR EMISSIONS CUMPUTATION FACTORS

Fuel Usage Conversion Factors	Natural Gas ⁻	Γurbines	Natural Gas [Engines	Diesel Reci	ip. Engine	REF.	DATE
-	SCF/hp-hr	9.524	SCF/hp-hr	7.143	GAL/hp-hr	0.0483	AP42 3.2-1	4/76 & 8/84
Equipment/Emission Factors	units	PM	SOx	NOx	VOC	CO	REF.	DATE
NG Turbines	gms/hp-hr		0.00247	1.3	0.01	0.83	AP42 3.2-1& 3.1-1	10/96
NG 2-cycle lean	gms/hp-hr		0.00185	10.9	0.43	1.5	AP42 3.2-1	10/96
NG 4-cycle lean	gms/hp-hr		0.00185	11.8	0.72	1.6	AP42 3.2-1	10/96
NG 4-cycle rich	gms/hp-hr		0.00185	10	0.14	8.6	AP42 3.2-1	10/96
Diesel Recip. < 600 hp.	gms/hp-hr	1	0.005505	14	1.12	3.03	AP42 3.3-1	10/96
Diesel Recip. > 600 hp.	gms/hp-hr	0.32	1.468	11	0.33	2.4	AP42 3.4-1	10/96
Diesel Boiler	lbs/bbl	0.084	0.009075	0.84	0.008	0.21	AP42 1.3-12,14	9/98
Diesel Marine Tier II	g/kw*hr			9.7				
NG Heaters/Boilers/Burners	lbs/mmscf	7.6	0.593	100	5.5	84	P42 1.4-1, 14-2, & 14	7/98
NG Flares	lbs/mmscf		0.593	71.4	60.3	388.5	AP42 11.5-1	9/91
Liquid Flaring	lbs/bbl	0.42	6.83	2	0.01	0.21	AP42 1.3-1 & 1.3-3	9/98
Tank Vapors	lbs/bbl				0.03		E&P Forum	1/93
Fugitives	lbs/hr/comp.				0.0005		API Study	12/93
Glycol Dehydrator Vent	lbs/mmscf				6.6		La. DEQ	1991
Gas Venting	lbs/scf				0.0034			

Sulphur Content Source	Value	Units
Fuel Gas	3.33	ppm
Diesel Fuel	0.0015	% weight
Produced Gas(Flares)	3.33	ppm
Produced Oil (Liquid Flaring)	1	% weight

COMPANY	AREA	BLOCK	LEASE		PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Anadarko Petroleum Corpo	Keathley Canyon	875	OCS-G 21444 (surf	ace)	Lucius Spar	KC 875 #005	, KC 918 #003	, and KC 919	Jill Fowler		832-636-155	#REF!					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	Average	ACT. FUEL	RUN	TIME		MAXIMUM	POUNDS	PER HOUR			EST	IMATED TO	ONS	
	Diesel Engines	HP	GAL/HR	Engine Load	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	%	SCF/D												1
	Burners	MMBTU/HR	SCF/HR	150.000	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	CO	PM	SOx	NOx	VOC	СО
PL INSTALLATION	PRIME MOVER>600hp diesel	0	0	40%	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ROV Boat	PRIME MOVER>600hp diesel	12000	579.6	100%	13910.40	24	5	8.46	38.80	290.75	8.72	63.44	0.51	2.33	17.44	0.52	3.81
CARTILLES SAMPLINGS	PRIME MOVER>600hp diesel	0	0	40%	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Production	Pigging Pump	1110	53.613	8	1286.71	24	365	0.78	3.59	26.89	0.81	5.87	3.43	15.72	117.80	3.53	25.70
	Pigging Pump	1110	53.613		1286.71	24	365	0.78	3.59	26.89	0.81	5.87	3.43	15.72	117.80	3.53	25.70
	Firewater Pump	1000	48.3		1159.20	2.00	52.00	0.70	3.23	24.23	0.73	5.29	0.04	0.17	1.26	0.04	0.27
	Firewater Pump	1000	48.3		1159.20	2.00	52.00	0.70	3.23	24.23	0.73	5.29	0.04	0.17	1.26	0.04	0.27
	Air Compressor	83	4.0089		96.21	24.00	365.00	0.18	0.27	2.56	0.20	0.55	0.80	1.18	11.21	0.90	2.43
	Crane	746	36.0318		864.76	12.00	365.00	0.53	2.41	18.07	0.54	3.94	1.15	5.28	39.58	1.19	8.64
	Crane	746	36.0318		864.76	12.00	365.00	0.53	2.41	18.07	0.54	3.94	1.15	5.28	39.58	1.19	8.64
	Survival Craft	20	0.966		23.18	2.00	52.00	0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.03	0.00	0.01
	Survival Craft	20	0.966		23.18	2.00	52.00	0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.03	0.00	0.01
	Rescue Boat	160	7.728		185.47	2.00	52.00	0.35	0.52	4.93	0.39	1.07	0.02	0.03	0.26	0.02	0.06
	Amine Reboiler	24	22857.14286		548571.43	24.00	365.00	0.17	0.01	2.29	0.13	1.92	0.76	0.06	10.01	0.55	8.41
	Emergency Generator	1333	64.3839		1545.21	8	52	0.94	4.31	32.30	0.97	7.05	0.20	0.90	6.72	0.20	1.47
	Aux Generator	2183	105.4389		2530.53	8	52	1.54	7.06	52.89	1.59	11.54	0.32	1.47	11.00	0.33	2.40
	Turbine Gen Nat Gas	10085	96049.54		2305188.96	24	365	PACE 8	0.05	28.88	0.22	18.44	(30,735)	0.24	126.48	0.97	80.76
	Turbine Gen Nat Gas	10085	96049.54		2305188.96	24	365		0.05	28.88	0.22	18.44		0.24	126.48	0.97	80.76
	Turbine Gen Nat Gas	10085	96049.54		2305188.96	24	365		0.05	28.88	0.22	18.44		0.24	126.48	0.97	80.76
	Turbine Compressor Nat Gas	10311	98201.964		2356847.14	24	365		0.06	29.52	0.23	18.85		0.25	129.32	0.99	82.57
	Turbine Compressor Nat Gas	10311	98201.964		2356847.14	24	365		0.06	29.52	0.23	18.85		0.25	129.32	0.99	82.57
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52	24	365		0.02	123.07	7.51	16.69		0.08	539.04	32.89	73.09
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52	24	365		0.02	123.07	7.51	16.69		0.08	539.04	32.89	73.09
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	Supply Boat	14805	715.0815		17161.96	24	52	10.44	47.87	358.71	10.76	78.26	6.51	29.87	223.84	6.72	48.84
Wellwork			01.05050501.6		India distribution		2000	10.000.000	10.600.000.0	SIGNEARIA.	2/4/37/20	WEATHER.	NEIGHALA.	FOREST N	AMMERICANI	200.00	SAMAGIAN
(CT/Snubbing	PRIME MOVER>600hp diesel	2000	96.6		2318.40	24.00	56.00	1.41	6.47	48.46	1.45	10.57	0.95	4.35	32.56	0.98	7.10
Unit/Wireline)	Traine movery doos	2000	00.0		2010.10	21.00	00.00	3500	0.11	3.10.10	1.10	10.01	0.00	1.00	02.00	0.00	1.10
SS SUPPORT		Water Control of the	\$4000000000000000000000000000000000000		\$60,000,000,000,000,000,000,000,000,000,	0000000000	0.000000000	47989427890077	98/90/2008/00	MODEL CONTRACT	: (***********************************	4/10/00/00/00/00/00	\$05.0919A00.0	38991084300	697253903000011	00 0000	380002002029
VESSEL	PRIME MOVER>600hp diesel	27493	1327.9119		31869.89	24.00	10.00	19.38	88.90	666.13	19.98	145.34	2.33	10.67	79.94	2.40	17.44
	MISC.	BPD	SCF/HR		COUNT												
1	TANKS-Not Routed to VRU	100				24	365				0.13	ľ				0.55	
	PROCESS FLARE- Routine		1701			24	365		0.00	0.12	0.10	0.66		0.00	0.53	0.45	2.89
	PROCESS FLARE- Upset 450 MM/D		18750000			12	6		11.12	1338.75	1130.63	7284.38		0.40	48.20	40.70	262.24
	PROCESS VENT-Routine		1137			24	365				3.87			U-ALAMA		16.93	
	PROCESS VENT-Upset 450 MM/D		18750000			12	6				63750.00					2295.00	
I	PROCESS VENT-Routine (Amine)*	1 1	145850			24	365				495.89					2172.00	
	FUGITIVES-				10000.0		365				5.00					21.90	
	GLYCOL STILL VENT-450 MM/D		18750000	l,		24	365				123.75					542.03	
Flowback After	OIL BURN	0				0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Completion	GAS FLARE		1000000				0		0.59	71.40	60.30	388.50		0.00	0.00	0.00	0.00
								7	3		- 10.100.000						
2018	YEAR TOTAL							47.72	224.89	3410.45	65634.78	8158.29	24.86	95.23	2517.77	5184.72	1015.63
		0															
EXEMPTION	DISTANCE FROM LAND IN MILES																
CALCULATION													7092.90	7092.90	7092.90	7092.90	121264.03
	213.0	3															

COMPANY	AREA	BLOCK	LEASE		PLATFORM	WELL			CONTACT		PHONE	REMARKS	S.				
Anadarko Petroleum Corporation	Keathley Canyon	875	OCS-G 21444 (surface)		Lucius Spar	KC 875 #005	, KC 918 #003	, and KC 919	Jill Fowler		832-636-155	#REF!					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	Average	ACT. FUEL	RUN	TIME		MAXIMUM	POUNDS	PER HOUR		6	EST	IMATED T	ONS	
	Diesel Engines	HP	GAL/HR	Engine Load	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	%	SCF/D												
PL INSTALLATION:	Burners	MMBTU/HR	SCF/HR	4000/	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	co	PM	SOx	NOx	voc	co
ROV Boat Reeled PipeLay Vsl.	PRIME MOVER>600hp diesel PRIME MOVER>600hp diesel	12,000 33480	579.6 1617.084	100% 100%	13910.4 38810.0	24 24	10 7	8.5 23.6	38.8 108.3	290.7 811.2	8.7 24.3	63.4 177.0	1.0 2.0	4.7 9.1	34.9 68.1	1.0 2.0	7.6 14.9
Umbilical Lay Vsl.	PRIME MOVER>600hp diesel	33480	1617.084	100%	38810.0	24	7	23.6	108.3	811.2	24.3	177.0	2.0	9.1	68.1	2.0	14.9
ROV Boat w. Crane	VESSELS>600hp diesel(crew)	12000	579.6	10078	13910.4	24	32	8.5	38.8	290.7	8.7	63.4	3.2	14.9	111.6	3.3	24.4
Supply Boat 1	VESSELS>600hp diesel(crew)	10800	521.64		12519.4	24	10	7.6	34.9	261.7	7.9	57.1	0.9	4.2	31.4	0.9	6.9
Supply Boat 2	VESSELS>600hp diesel(crew)	10800	521.64		12519.4	24	10	7.6	34.9	261.7	7.9	57.1	0.9	4.2	31.4	0.9	6.9
70.10890	VESSELS>600hp diesel(supply)		0		0.0		0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	VESSELS>600hp diesel(supply)		0		0.0		0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	VESSELS>600hp diesel(supply)		0		0.0		0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Production	Pigging Pump	1110	53.613		1286.71	24	365	0.78	3.59	26.89	0.81	5.87	3.43	15.72	117.80	3.53	25.70
	Pigging Pump	1110	53.613		1286.71	24	365	0.78 0.70	3.59	26.89	0.81	5.87	3.43 0.04	15.72	117.80	3.53	25.70
	Firewater Pump Firewater Pump	1000 1000	48.3 48.3		1159.20 1159.20	2.00 2.00	52.00 52.00	0.70	3.23 3.23	24.23 24.23	0.73 0.73	5.29 5.29	0.04	0.17 0.17	1.26 1.26	0.04 0.04	0.27 0.27
	Air Compressor	83	4 0089		96.21	24.00	365.00	0.70	0.27	24.23	0.73	0.55	0.04	1.18	11.20	0.04	2 43
	Crane	746	36.0318		864.76	12.00	365.00	0.10	2.41	18.07	0.20	3.94	1.15	5.28	39.58	1.19	8.64
1	Crane	746	36.0318		864.76	12.00	365.00	0.53	2.41	18.07	0.54	3.94	1.15	5.28	39.58	1.19	8.64
	Survival Craft	20	0.966		23.18	2.00	52.00	0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.03	0.00	0.01
	Survival Craft	20	0.966		23.18	2.00	52.00	0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.03	0.00	0.01
	Rescue Boat	160	7.728		185.47	2.00	52.00	0.35	0.52	4.93	0.39	1.07	0.02	0.03	0.26	0.02	0.06
	Amine Reboiler	24	22857.14286		548571.43	24.00	365.00	0.17	0.01	2.29	0.13	1.92	0.76	0.06	10.01	0.55	8.41
	Emergency Generator	1333	64.3839		1545.21	8	52	0.94	4.31	32.30	0.97	7.05	0.20	0.90	6.72	0.20	1.47
	Aux Generator	2183	105.4389		2530.53	8	52	1.54	7.06	52.89	1.59	11.54	0.32	1.47	11.00	0.33	2.40
2	Turbine Gen Nat Gas	10085	96049.54		2305188.96	24	365		0.05	28.88	0.22	18.44		0.24	126.48	0.97	80.76
	Turbine Gen Nat Gas	10085	96049.54		2305188.96	24	365		0.05	28.88	0.22	18.44		0.24	126.48	0.97	80.76
	Turbine Gen Nat Gas	10085 10311	96049.54 98201.964		2305188.96 2356847.14	24 24	365 365		0.05	28.88 29.52	0.22 0.23	18.44		0.24 0.25	126.48 129.32	0.97 0.99	80.76 82.57
	Turbine Compressor Nat Gas Turbine Compressor Nat Gas	10311	98201.964		2356847.14	24	365		0.06	29.52	0.23	18.85 18.85		0.25	129.32	0.99	82.57
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52	24	365		0.00	123.07	7.51	16.69		0.23	539.04	32.89	73.09
	Flash Gas Comp 4 lean nat gas	4735	33822.105		811730.52	24	365		0.02	123.07	7.51	16.69		0.08	539.04	32.89	73.09
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
9	WHRU Burner Nat gas	17	16190.47619		388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	Supply Boat	14805	715.0815		17161.96	24	52	10.44	47.87	358.71	10.76	78.26	6.51	29.87	223.84	6.72	48.84
Wellwork (CT/Snubbing	PRIME MOVER>600hp diesel	2000	96.6		2318.40	24.00	56.00	1,41	6.47	48.46	1.45	10.57	0.95	4.35	32.56	0.98	7.10
Unit/Wireline)	Trivic Movert Good paleser	2000	30.0		2010.40	24.00	30.00	21,340	0.47	10.10	1.40	10.07	0.55	4.00	02.00	0.00	7.10
SS SUPPORT VESSEL	PRIME MOVER>600hp diesel	27493	1327.9119		31869.89	24.00	10.00	19.38	88.90	666.13	19.98	145.34	2.33	10.67	79.94	2.40	17.44
	MISC.	BPD	SCF/HR		COUNT		100000000	STRANSFERGIST	83/59/33/69	**************************************	649604000000	SHOWERSHIELD	7774574-50	Milesara el	ESSEPHISTON'	OSCILLARISES.	ACCOMPANIES
	TANKS-Not Routed to VRU	100	3CF/FIR		COUNT	24	365				0.13					0.55	
	PROCESS FLARE- Routine	100	1701			24	365		0.00	0.12	0.10	0.66		0.00	0.53	0.45	2.89
	PROCESS FLARE- Upset 450 MM/D		18750000			12	6		11.12	1338.75	1130.63	7284.38		0.40	48.20	40.70	262.24
	PROCESS VENT-Routine		1137			24	365			1000.10	3.87	1201.00		0.10		16.93	Lozizi
	PROCESS VENT-Upset 450 MM/D		18750000			12	6				63750.00					2295.00	
	PROCESS VENT-Routine (Amine)*		145850			24	365				495.89					2172.00	
	FUGITIVES-				10000.0	- 70	365				5.00					21.90	
	GLYCOL STILL VENT-450 MM/D		18750000			24	365				123.75		REVONAN	2011/00/2011 T	NDOWNOUTV	542.03	Charried Assets
Flowback After	OIL BURN	0	4000			0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Completion	GAS FLARE		1000000				0		0.59	71.40	60.30	388.50		0.00	0.00	0.00	0.00
2010	YEAR TOTAL							118.60	550.05	5846.93	65707.88	8689.88	34.40	139.02	2845.94	5194.57	1087.24
2019	LEAN TOTAL							110.00	555.05	0040.93	30101.00	0009.00	04.40	103.02	2040.54	0104.07	1007.24
EXEMPTION CALCULATION	DISTANCE FROM LAND IN MILES		,										7092.90	7092.90	7092.90	7092.90	121264.03
CALCOLATION	213.0																
	1000 000 1 0000			9									•	•			

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Anadarko Petroleum Cor	Keathley Canyon	875	OCS-G 21444 (sur	Lucius Spar	KC 875 #005	KC 918 #00	3, and KC 919	Jill Fowler		832-636-155	#REF!					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	ACT. FUEL	RUN	TIME		MAXIMUM	POUNDS	PER HOUR			EST	IMATED T	ONS	
	Diesel Engines	HP	GAL/HR	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	SCF/D												
	Burners	MMBTU/HR	SCF/HR	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	co	PM	SOx	NOx	VOC	СО
Production	Pigging Pump	1110	53.613	1286.71	24	365	0.78	3.59	26.89	0.81	5.87	3.43	15.72	117.80	3.53	25.70
	Pigging Pump	1110	53.613	1286.71	24	365	0.78	3.59	26.89	0.81	5.87	3.43	15.72	117.80	3.53	25.70
	Firewater Pump	1000	48.3	1159.20	2.00	52.00	0.70	3.23	24.23	0.73	5.29	0.04	0.17	1.26	0.04	0.27
	Firewater Pump	1000	48.3	1159.20	2.00	52.00	0.70	3.23	24.23	0.73	5.29	0.04	0.17	1.26	0.04	0.27
	Air Compressor	83	4.0089	96.21	24.00	365.00	0.18	0.27	2.56	0.20	0.55	0.80	1.18	11.21	0.90	2.43
	Crane	746	36.0318	864.76	12.00	365.00	0.53	2.41	18.07	0.54	3.94	1.15	5.28	39.58	1.19	8.64
	Crane	746	36.0318	864.76	12.00	365.00	0.53	2.41	18.07	0.54	3.94	1.15	5.28	39.58	1.19	8.64
	Survival Craft	20	0.966	23.18	2.00	52.00	0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.03	0.00	0.01
	Survival Craft	20	0.966	23.18	2.00	52.00	0.04	0.06	0.62	0.05	0.13	0.00	0.00	0.03	0.00	0.01
	Rescue Boat	160	7.728	185.47	2.00	52.00	0.35	0.52	4.93	0.39	1.07	0.02	0.03	0.26	0.02	0.06
	Amine Reboiler	24	22857.14286	548571.43	24.00	365.00	0.17	0.01	2.29	0.13	1.92	0.76	0.06	10.01	0.55	8.41
	Emergency Generator	1333	64.3839	1545.21	8	52	0.94	4.31	32.30	0.97	7.05	0.20	0.90	6.72	0.20	1.47
8	Aux Generator	2183 10085	105.4389 96049.54	2530.53 2305188.96	8 24	52 365	1.54	7.06 0.05	52.89	1.59	11.54 18.44	0.32	1.47 0.24	11.00 126.48	0.33 0.97	2.40 80.76
	Turbine Gen Nat Gas								28.88	0.22						
	Turbine Gen Nat Gas	10085	96049.54	2305188.96	24	365		0.05	28.88	0.22	18.44		0.24	126.48	0.97	80.76
	Turbine Gen Nat Gas	10085 10311	96049.54 98201.964	2305188.96 2356847.14	24 24	365 365		0.05 0.06	28.88 29.52	0.22 0.23	18.44 18.85		0.24 0.25	126.48 129.32	0.97	80.76 82.57
	Turbine Compressor Nat Gas			2356847.14	24	45000000		0.06			18.85				0.99	
l	Turbine Compressor Nat Gas	10311 4735	98201.964 33822.105	811730.52	24	365 365		0.06	29.52 123.07	0.23 7.51	16.69		0.25 0.08	129.32 539.04	32.89	82.57 73.09
	Flash Gas Comp 4 lean nat gas Flash Gas Comp 4 lean nat gas	4735 4735	33822.105	811730.52	24	365		0.02	123.07	7.51	16.69		0.08	539.04	32.89	73.09
		17	16190.47619	388571.43	24	365	0.12	0.02	1.62	0.09	1.36	0.54	0.08	7.09	0.39	5.96
	WHRU Burner Nat gas WHRU Burner Nat gas	17	16190.47619	388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619	388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619	388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	WHRU Burner Nat gas	17	16190.47619	388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
l	WHRU Burner Nat gas	17	16190.47619	388571.43	24	365	0.12	0.01	1.62	0.09	1.36	0.54	0.04	7.09	0.39	5.96
	Supply Boat	14805	715.0815	17161.96	24	52	10.44	47.87	358.71	1 10.76	78.26	6.51	29.87	223.84	6.72	48.84
Wellwork	Supply Boat	14000	7 10.0010	17 101.50	27	52	10.44	47.07	330.71	10.70	70.20	0.51	25.07	220.04	0.72	40.04
(CT/Snubbing Unit/Wireline)	PRIME MOVER>600hp diesel	2000	96.6	2318.40	24	56	1.41	6.47	48.46	1.45	10.57	0.95	4.35	32.56	0.98	7.10
SS SUPPORT VESSEL	PRIME MOVER>600hp diesel	27493	1327.9119	31869.89	24	10	19.38	88.90	666.13	19.98	145.34	2.33	10.67	79.94	2.40	17.44
	MISC.	BPD	SCF/HR	COUNT												
ı i	TANKS-Not Routed to VRU	100			24	365				0.13					0.55	
	PROCESS FLARE- Routine		1701		24	365		0.00	0.12	0.10	0.66		0.00	0.53	0.45	2.89
	PROCESS FLARE- Upset 450 MM/D		18750000		12	6		11.12	1338.75	1130.63	7284.38		0.40	48.20	40.70	262.24
	PROCESS VENT-Routine		1137		24	365				3.87					16.93	
	PROCESS VENT-Upset 450 MM/D		18750000		12	6				63750.00					2295.00	
	PROCESS VENT-Routine (Amine)*		145850		24	365				495.89					2172.00	
	FUGITIVES-			10000.0		365				5.00					21.90	
	GLYCOL STILL VENT-450 MM/D		18750000		24	365				123.75		20000000	50.0000	CONTRACTOR	542.03	CHONOMINA
Flowback After	OIL BURN	0			0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Completion	GAS FLARE		0					0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
2020-2034	YEAR TOTAL						39.26	185.50	3048.30	65565.76	7706.35	24.35	92.90	2500.32	5184.20	1011.83
EXEMPTION CALCULATION	DISTANCE FROM LAND IN MILES											7092.90	7092.90	7092.90	7092.90	121264.03
	213.0															

SUMMARY

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL
Anadarko Petrol	Keathley Canyon	875	OCS-G 21444 (surface	Lucius Spar	KC 875 #005, KC 918 a
		Emitted		Substance	
Year					
	PM	SOx	NOx	voc	CO
2018	24.86	95.23	2517.77	5184.72	1015.63
2019	34.40	139.02	2845.94	5194.57	1087.24
2020-2034	24.35	92.90	2500.32	5184.20	1011.83
Allowable	7092.90	7092.90	7092.90	7092.90	121264.03

OMB Control No. 1010-0151 OMB Approval Expires: 03/31/2018

COMPANY	Anadarko Petroleum Corporation
AREA	Keathley Canyon
BLOCK	918
LEASE	OCS-G 32654
PLATFORM	Lucius
WELL	KC 918 #001 ST02
COMPANY CONTACT	Jill Fowler
TELEPHONE NO.	832-636-1554
REMARKS	Conduct completion ops on KC 918 #001 ST02, followed by installing one subsea jumper and placing tje KC 918 #001 ST02 on production

LEASE TE	LEASE TERM PIPELINE CONSTRUCTION INFORMATION:								
YEAR	NUMBER OF PIPELINES	TOTAL NUMBER OF CONSTRUCTION DAYS							
1999									
2000									
2001									
2002									
2003									
2004									
2005									
2006									
2007									
2008									
2009									

AIR EMISSIONS CUMPUTATION FACTORS

Fuel Usage Conversion Factors	Natural Gas ⁻	Γurbines	Natural Gas [Engines	Diesel Reci	ip. Engine	REF.	DATE
-	SCF/hp-hr	9.524	SCF/hp-hr	7.143	GAL/hp-hr	0.0483	AP42 3.2-1	4/76 & 8/84
Equipment/Emission Factors	units	PM	SOx	NOx	VOC	CO	REF.	DATE
NG Turbines	gms/hp-hr		0.00247	1.3	0.01	0.83	AP42 3.2-1& 3.1-1	10/96
NG 2-cycle lean	gms/hp-hr		0.00185	10.9	0.43	1.5	AP42 3.2-1	10/96
NG 4-cycle lean	gms/hp-hr		0.00185	11.8	0.72	1.6	AP42 3.2-1	10/96
NG 4-cycle rich	gms/hp-hr		0.00185	10	0.14	8.6	AP42 3.2-1	10/96
Diesel Recip. < 600 hp.	gms/hp-hr	1	0.005505	14	1.12	3.03	AP42 3.3-1	10/96
Diesel Recip. > 600 hp.	gms/hp-hr	0.32	1.468	11	0.33	2.4	AP42 3.4-1	10/96
Diesel Boiler	lbs/bbl	0.084	0.009075	0.84	0.008	0.21	AP42 1.3-12,14	9/98
Diesel Marine Tier II	g/kw*hr			9.7				
NG Heaters/Boilers/Burners	lbs/mmscf	7.6	0.593	100	5.5	84	P42 1.4-1, 14-2, & 14	7/98
NG Flares	lbs/mmscf		0.593	71.4	60.3	388.5	AP42 11.5-1	9/91
Liquid Flaring	lbs/bbl	0.42	6.83	2	0.01	0.21	AP42 1.3-1 & 1.3-3	9/98
Tank Vapors	lbs/bbl				0.03		E&P Forum	1/93
Fugitives	lbs/hr/comp.				0.0005		API Study	12/93
Glycol Dehydrator Vent	lbs/mmscf				6.6		La. DEQ	1991
Gas Venting	lbs/scf				0.0034			

Sulphur Content Source	Value	Units
Fuel Gas	3.33	ppm
Diesel Fuel	0.0015	% weight
Produced Gas(Flares)	3.33	ppm
Produced Oil (Liquid Flaring)	1	% weight

AIR EMISSIONS CALCULATIONS - FOURTH YEAR

COMPANY	AREA	BLOCK	LEASE		PLATFORM	WELL			CONTACT		PHONE	REMARKS					
	Keathley Canyon	918	OCS-G 32654		Lucius	KC 918 #001 S			Jill Fowler		832-636-1554	#REFI					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	Average	ACT. FUEL	RUN	TIME		MAXIMUI	M POUNDS P	ER HOUR			ES	TIMATED TO	NS	
	Diesel Engines	HP	GAL/HR	Engine	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	Load %	SCF/D												
	Burners	MMBTU/HR	SCF/HR	2000 70	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	co	PM	SOx	NOx	VOC	co
COMPLETION OPS	PRIME MOVER>600hp diesel (DRILLSHIP)	64370	3109 071		74617 70	24	56	45 37	208 14	1559 63	46 79	340 28	30 49	139 87	1048 07	31 44	228 67
3 trips/week	VESSELS>600hp diesel(crew)	9266	447 5478		10741 15	24	24	6 53	29 96	224 51	6 74	48 98	1 88	8 63	64 66	1 94	14 11
2 trips/week	VESSELS>600hp diesel(supply)	10800	521 64		12519 36	24	16	7 61	34 92	261 67	7 85	57 09	1 46	6 70	50 24	1 51	10 96
Support Vessel	PRIME MOVER>600hp diesel	27493	1327 9119		31869 89	24	3	19 38	88 90	666 13	19 98	145 34	0 70	3 20	23 98	0 72	5 23
	BURNER diesel	0				0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	AUXILIARY EQUIP<600hp diesel	0	0		0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	0	0		0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(supply)	0	0		0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(tugs)	0	0		0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
PIPELINE		42000	F70.0		42040.40	24	Е	0.46	20.00	200.75	0.70	62.44	0.54	2.22	47.44	0.50	2.04
INSTALLATION	ROV Boat diesel	12000	579 6		13910 40	24	5	8 46	38 80	290 75	8 72	63 44	0 51	2 33	17 44	0 52	3 81
3 trips/week	VESSELS>600hp diesel(crew)		0		0 00	0	0	0.00	0 00	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00
2 trips/week	VESSELS>600hp diesel(supply)		ŏ		0 00	ő	o l	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
FACILITY	DERRICK BARGE diesel	0	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0 00	0.00	0 00	0 00	0.00
INSTALLATION	MATERIAL TUG diesel	ő	ő		0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INTOTALLATION	VESSELS>600hp diesel(crew)	ő	ŏ		0 00	ő	ő	0 00	0 00	0 00	0.00	0.00	0.00	0.00	0 00	0 00	0 00
	VESSELS>600hp diesel(supply)	ő	ŏ		0 00	ŏ	ő	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
PRODUCTION	REGP <600hp diesel (Fire Pump#1)		0		0 00			0.00	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00	0 00
I KODOCIION	RECIP <600hp diesel (Fire Pump #1)		Ö		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	RECIP <600hp diesel (Crane East)		0		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	RECIP <600hp diesel (Crane west)		Ů.		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	RECIP <600hp diesel (Air Compressor 1)		ň		0 00			0.00	0 00	0.00	0 00	0.00	0.00	0 00	0 00	0 00	0 00
	RECIP <600hp diesel (Air Compressor 2)		Ö		0.00			0.00	0.00	0 00	0 00	0.00	0.00	0 00	0 00	0.00	0 00
	RECIP >600hp diesel (EGEN 1)		ŏ		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	RECIP > 600hp diesel (EGEN 2)		ŏ		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00
	RECIP <600hp diesel (Lifeboat #1)		0		0 00			0 00	0 00	0 00	0 00	0 00	0.00	0.00	0 00	0 00	0 00
	RECIP <600hp diesel (Lifeboat #2)		ň		0 00			0 00	0 00	0 00	0.00	0.00	0.00	0 00	0 00	0 00	0 00
	RECIP <600hp diesel (Lifeboat #3)		ŏ		0 00			0.00	0 00	0 00	0 00	0.00	0.00	0 00	0 00	0.00	0 00
	SUPPORT VESSEL diesel		0 00	30%	0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	TURBINE Dual Fuel-nat gas (Gen #1)		0	00.0	0 00			""	0 00	0 00	0 00	0 00	""	0.00	0 00	0 00	0 00
	TURBINE Dual Fuel-diesel (Gen #1)		ŏ		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	TURBINE Dual Fuel-nat gas (Gen #2)		ň		0 00			000	0 00	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00
	TURBINE Dual Fuel-diesel (Gen #2)		ň		0 00			0 00	0 00	0 00	0.00	0.00	0.00	0 00	0 00	0 00	0 00
	TURBINE Dual Fuel-nat gas (Gen #3)		ň		0 00				0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	TURBINE Dual Fuel-diesel (Gen #3)		ŏ		0 00			0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	TURBINE nat gas (BGC-A)		ŏ		0 00				0 00	0 00	0 00	0 00	I	0 00	0 00	0 00	0 00
	TURBINE nat gas (BGC-B)		ō		0.00				0 00	0 00	0.00	0 00		0.00	0 00	0 00	0 00
	BURNER nat gas		0 00		0.00			0.00	0 00	0 00	0.00	0.00	0.00	0.00	0 00	0 00	0 00
	MISC.	BPD	SCF/HR		COUNT												
	TANK-										0.00					0 00	
	FLARE-						[]		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	PROCESS VENT-										0 00			I		0 00	
	FUGITIVES-										0 00			I		0 00	
	GLYCOL STILL VENT-										0 00			<u> </u>		0 00	
DRILLING	OIL BURN	0	4050000			0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
WELL TEST	GAS FLARE	 	1250000		-	24	2		0 74	89 25	75 38	485 63	 	0 02	2 14	1 81	11 66
2018	YEAR TOTAL	1						87.35	401.46	3091.94	165.46	1140.76	35.04	160.75	1206.54	37.94	274.43
EXEMPTION									1								
CALCULATION	DISTANCE FROM LAND IN MILES												7092.90	7092.90	7092.90	7092.90	121264.03
	213 0	<u> </u>															

AIR EMISSIONS CALCULATIONS

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL
Anadarko Petro	Keathley Canyon	918	OCS-G 32654	Lucius	KC 918 #001 ST02
		Emitted		Substance	
Year					
11					
	РМ	SOx	NOx	voc	со
2018	PM 35.04	SOx 160.75	NOx 1206.54	VOC 37.94	CO 274.43

OMB Control No. 1010-0151 OMB Approval Expires: 03/31/2018

COMPANY	Anadarko Petroleum Corporation
AREA	Keathley Canyon
BLOCK	919
LEASE	OCS-G 21447
PLATFORM	Lucius
WELL	KC 919 #008
COMPANY CONTACT	Jill Fowler
TELEPHONE NO.	832-636-1554
REMARKS	Install subsea jumper and place KC 919 SS008 on production

LEASE TER	LEASE TERM PIPELINE CONSTRUCTION INFORMATION:								
YEAR	NUMBER OF PIPELINES	TOTAL NUMBER OF CONSTRUCTION DAYS							
1999									
2000									
2001									
2002									
2003									
2004									
2005									
2006									
2007									
2008									
2009									

AIR EMISSIONS CUMPUTATION FACTORS

Fuel Usage Conversion Factors	Natural Gas ⁻	Γurbines	Natural Gas [Engines	Diesel Reci	ip. Engine	REF.	DATE
-	SCF/hp-hr	9.524	SCF/hp-hr	7.143	GAL/hp-hr	0.0483	AP42 3.2-1	4/76 & 8/84
Equipment/Emission Factors	units	PM	SOx	NOx	VOC	CO	REF.	DATE
NG Turbines	gms/hp-hr		0.00247	1.3	0.01	0.83	AP42 3.2-1& 3.1-1	10/96
NG 2-cycle lean	gms/hp-hr		0.00185	10.9	0.43	1.5	AP42 3.2-1	10/96
NG 4-cycle lean	gms/hp-hr		0.00185	11.8	0.72	1.6	AP42 3.2-1	10/96
NG 4-cycle rich	gms/hp-hr		0.00185	10	0.14	8.6	AP42 3.2-1	10/96
Diesel Recip. < 600 hp.	gms/hp-hr	1	0.005505	14	1.12	3.03	AP42 3.3-1	10/96
Diesel Recip. > 600 hp.	gms/hp-hr	0.32	1.468	11	0.33	2.4	AP42 3.4-1	10/96
Diesel Boiler	lbs/bbl	0.084	0.009075	0.84	0.008	0.21	AP42 1.3-12,14	9/98
Diesel Marine Tier II	g/kw*hr			9.7				
NG Heaters/Boilers/Burners	lbs/mmscf	7.6	0.593	100	5.5	84	P42 1.4-1, 14-2, & 14	7/98
NG Flares	lbs/mmscf		0.593	71.4	60.3	388.5	AP42 11.5-1	9/91
Liquid Flaring	lbs/bbl	0.42	6.83	2	0.01	0.21	AP42 1.3-1 & 1.3-3	9/98
Tank Vapors	lbs/bbl				0.03		E&P Forum	1/93
Fugitives	lbs/hr/comp.				0.0005		API Study	12/93
Glycol Dehydrator Vent	lbs/mmscf				6.6		La. DEQ	1991
Gas Venting	lbs/scf				0.0034			

Sulphur Content Source	Value	Units
Fuel Gas	3.33	ppm
Diesel Fuel	0.0015	% weight
Produced Gas(Flares)	3.33	ppm
Produced Oil (Liquid Flaring)	1	% weight

AIR EMISSIONS CALCULATIONS - FOURTH YEAR

Apparation Detroiteum Conferentitiesy Carryon	VOC 000	000 00 00 00 00 00 00 00 00 00 00 00 00
OPERATIONS EQUIPMENT RATING MAX. FUEL A verage Diesel Engines HP SCF.HR Net. Gas Engines HP SCF.HR Net. Gas Engines HP SCF.HR SCF.HR SCF.DR	VOC 000	000 00 00 00 00 00 00 00 00 00 00 00 00
DieselEngines HP GALUTE Fighre Nat. Gas Engines HP SCFHR SCFHR	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
Net. Gas Engines	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
Burners	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
PRIME MOVER>600hp diesel	000 00 00 00 00 00 00 00 00 00 00 00 00	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
PRIME MOVER>600hp diesel	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	000 00 00 00 00 00 00 00 00 00 00 00 00
PRIME MOVER>600hp diesel	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
BURNER diesel	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
AUXILIARY EQUIP<600hp diesel	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
VESSELS>600hp diesel(supply)	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
VESSELS>600hp diesel(supply) 0 0 0 0 0 0 0 0 0	000 00 00 00 00 00 00 00 00 00 00 00 00	000 00 00 00 00 00 00 00 00 00 00 00 00
PIPELINE	000 000 000 000 000 000 000 000 000 00	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
VESSELS>600hp diesel(tugs) 0 0 0 0 0 0 0 0 0	052 3 000 0 000 0 000 0 000 0 000 0	0 52 3 0 00 0 0 00 0 0 00 0 0 00 0 0 00 0 0 00 0
INSTALLATION ROV Boat diesel 12000 5/9 6 13910 40 24 5 8 46 38 80 290 75 8 72 63 44 051 2 33 17 44	0 00 0 0 00 0 0 00 0 0 00 0 0 00 0	0 00 0 0 00 0 0 00 0 0 00 0 0 00 0 0 00 0
INSTALLATION ROV Boat diesel	0 00 0 0 00 0 0 00 0 0 00 0 0 00 0	0 00 0 0 00 0 0 00 0 0 00 0 0 00 0 0 00 0
3 trips/week VESSELS>600hp diesel(crew) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 00 0 0 0 00 0 0 00 0 0 00 0 0 00 0	0 00 0 0 00 0 0 00 0 0 00 0 0 00 0
2 trips/week VESSELS>600hp diesel(supply) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 00 0 0 0 00 0 0 00 0 0 00 0 0 00 0	0 00 0 0 00 0 0 00 0 0 00 0 0 00 0
FACILITY DERRICK BARGE diesel 0 0 0 0 0 0 0 0 0	0 00 00 0 00 00 0 00 00	0 00 0 0 00 0 0 00 0 0 00 0
INSTALLATION MATERIAL TUG diesel 0 0 0 0 0 0 0 0 0	0 00 0	0 00 0 0 00 0 0 00 0
VESSELS>600hp diesel(crew)	0 00 0	0 00 0 0 00 0
VESSELS>600hp diesel (supply) 0 0 0 0 0 0 0 0 0	0 00 0	
RECIP <600hp diesel (Fire Pump #1) 0 0 00		
RECIP <600hp diesel (Crane East) 0 0.00	1 000 1	0 0 0 0
RECIP <600hp diesel (Crane west) 0 00 000 000 000 000 000 000 000 000	I 000 I 0	0 0 0 0
	0 00 0	0 0 0
	0 00 0	0 0 0
	0 00 0	0 0 0
RECIP <600hp diesel (Air Compressor 2) 0 000 000 000 000 000 000 000 000 00	0 00 0	0 0 0
RECIP >600hp diesel (EGEN 1) 0 000 000 000 000 000 000 000 000 00	0 00 0	000 0
RECIP >600hp diesel (EGEN 2) 0 000 000 000 000 000 000 000 000 00		
RECIP <600hp diesel (Lifeboat #1) 000 000 000 000 000 000 000 000 000 0		
RECIP <600hp diesel (Lifeboat #2) 0 00 000 000 000 000 000 000 000 000		
RECIP <600hp diesel (Lifeboat #3) 0 000 000 000 000 000 000 000 000 000		
SUPPORT VESSEL diesel 000 30% 000 000 000 000 000 000 000 000 000 000 000		
TURBINE Dual Fuel-nat gas (Gen #1) 0 000 000 000 000 000 000 000 000 000		
TURBINE Dual Fuel-diesel (Gen #1) 0 000 000 000 000 000 000 000 000 000		
TURBINE Dual Fuel-nat gas (Gen #2) 0 000 000 000 000 000 000 000 000 000		
TURBINE Dual Fuel-diesel (Gen #2) 0 000 000 000 000 000 000 000 000 000		
TURBINE Dual Fuel-nat gas (Gen #3) 0 000 000 000 000 000 000 000 000 000		
TURBINE Dual Fuel-diesel (Gen #3) 0 000 000 000 000 000 000 000 000 000		
TURBINE nat gas (BGC-A) 0 000 000 000 000 000 000 000 000 000		
TURBINE nat gas (BGC-B) 0 000 000 000 000 000 000 000 000 000		
BURNER nat gas 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.	000 0	0 00 0
MISC. BPD SCF/HR COUNT		0.00
TANK- 000 000 000 000 000 000 000 000 000 0	0 00	
PROCESS VENT- 000 000 000 000 000 000 000 000	0 000	
FUGITIVES-	0 00	
GLYCOL STILL VENT-	0 00	
DRILLING OIL BURN 0 0 0 000 000 000 000 000 000 000 000		
WELL TEST GAS FLARE 0 0 0 0.00 0.00 0.00 0.00 0.00 0.00		
2018 YEAR TOTAL 8.46 38.80 290.75 8.72 63.44 0.51 2.33 17.44	0.52 3	0.52 3
	0.02	0.02
EXEMPTION DISTANCE FROM LAND IN MILES 7092.90 7092.90 7092.90	7092.90 121	92.90 1212
213 0 213 0	. 552.55	12.12

AIR EMISSIONS CALCULATIONS

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL
Anadarko Petro	Keathley Canyon	919	OCS-G 21447	Lucius	KC 919 #008
		Emitted		Substance	
Year					
	PM	SOx	NOx	voc	CO
2018	0.51	2.33	17.44	0.52	3.81
Allowable	7092.90	7092.90	7092.90	7092.90	121264.03

I OIL SPILL INFORMATION

(a) Oil Spill Response Planning

(i) OSRP Information

All the proposed activities and facilities in this DOCD are covered by the Regional Oil Spill Response Plan (OSRP) approved on August 14, 2015 for Anadarko Petroleum Corporation and its subsidiaries, Anadarko US Offshore Corporation and Anadarko E&P Company L.P. (Company Numbers 00981, 02219 and 00148, respectively) in accordance with 30 CFR Part 254. The June 2017 biennial updates were acknowledged by BSEE July 12, 2017, and October 5, 2017 updates were acknowledged by BSEE November 2, 2017. Per BSEE the OSRP is in compliance with 30 CFR 254.30.

(ii) Spill Response Sites

Primary Response Equipment Location(s)	Preplanned Staging Location(s)
Houma, Louisiana	Fourchon, Louisiana
Harvey, Louisiana	Harvey, Louisiana
Venice, Louisiana	Venice, Louisiana
Lake Charles, Louisiana	Cameron, Louisiana
Galveston, Texas	Galveston, Texas

(iii) OSRO Information

Anadarko maintains a contract with Clean Gulf Associates (CGA) for spill response equipment. Various equipment locations are staged throughout the Gulf of Mexico. CGA equipment can be referenced on their website: http://www.cleangulfassoc.com/. Personnel would be obtained from the Marine Spill Response Corporation's (MSRC) STARS network, including a supervisor to operate the equipment.

In addition Anadarko has a contract with the Marine Spill Response Corporation (MSRC) for spill response equipment. MSRC stages equipment throughout the Gulf of Mexico and has recently completed a large expansion of its resources, with particular focus on deepwater. The expansion is known as "Deep Blue". MSRC capabilities and a complete equipment listing is available on-line at: http://www.msrc.org/.

Anadarko is also a member of the Marine Well Containment Company (MWCC), which provides access to containment response capabilities and includes subsea dispersant injection equipment.

(iv) Worst-Case Scenario Determination

Category	Regional OSRP	DOCD
Type of Activity	Production	Production
Facility Location (area/block)	GC 680	KC 875
Facility Designation	Platform A	Well KC 875 #001 ST01
Distance to Nearest Shoreline	120 Miles	213 miles
Storage Tanks (total)	5,735 bbls	NA
Flowlines (on facility)	1,892 bbls	NA
Lease Term Pipelines	11,682 bbls	1,076 bbls (subsea)
Uncontrolled Blowout	47,380 BOPD	35,000 BOPD
Total Volume	66,689 BOPD	36,076 BOPD
Type of Oil(s)	Oil	Oil
API Gravity	30	31

Anadarko has determined that the worst-case scenario from the activities proposed in this Initial DOCD do not supersede the worst-case scenario for Green Canyon Block 680.

Since Anadarko has the capability to respond to the worst-case spill scenario included in our Regional OSRP approved on August 14, 2015 (and update acknowledged on November 2, 2017), I hereby certify that Anadarko Petroleum Corporation has the capability to respond, to the maximum extent practicable, to a worst-case discharge, or a substantial threat of such a discharge, resulting from the activities proposed in our DOCD.

(b) Oil Spill Response Discussion

For the purpose of NEPA analysis, the largest spill volume originating from the proposed activity would be an uncontrolled blowout of the well during production operations at 35,000 BOPD with an API gravity of 31.0°. A discussion of the blowout scenario from this proposed activity is included within this Initial DOCD under Section B.

Land Segment and Resource Identification Modeling

Trajectory of a spill and the probability of its impacting a land segment have been projected utilizing information in the BOEM Oil Spill Risk Analysis Model (OSRAM) for the Central Gulf of Mexico. Additional information may be referenced in the "Oil-Spill Risk Analysis:

Contingency Planning Statistics for Gulf of Mexico OCS Activities" (OCS Report MMS 2004-026), using the average conditional probability for 3, 10, and 30 day impacts.

Keathley Canyon Blocks 875, 918, and 919 are located within Launch Area 29. According to the BOEM OSRAM, the trajectory indicates a 2% probability of potential impact to the shoreline in Cameron Parish, Louisiana, Matagorda County, Texas, and/or Galveston County, Texas. The results are shown in Table I-2.

Cameron Parish and/or Matagorda County are identified as the most probable potential impacted parish or county within the Gulf of Mexico for this operation. Cameron Parish is located in Louisiana and includes Cameron Prairie National Wildlife Refuge (NWR), East Cove Unit (a part of the Cameron Prairie NWR), Lacassine NWR, and Sabine NWR. Matagorda County is located Texas and includes Big Boggy NWR, a portion of San Bernard NWR, and Mad Island Wildlife Management Area (WMA).

Response

Anadarko will make every effort to respond to the worst-case discharge as effectively as possible. Response equipment available to respond to the worst-case discharge and the estimated time of a spill response from oil spill detection to equipment deployment on-site is included in **Table I-3.** The table estimates individual times needed for procurement, load out, travel time to the site and deployment. In the event of an actual incident equipment and times can vary.

For the purpose of response scenario discussion, an uncontrolled blowout of the well would be considered the largest potential spill volume at 35,000 BOPD. An ADIOS weathering model was run based on a similar type of oil expected to be produced from this well. Based on this information, approximately 33% (11,550 bbls) of the initial volume would be evaporated/dispersed within 24 hours.

If approved and appropriate, 4 sorties (8,000 gallons) from the Basler aircraft and 8 sorties (9,600 gallons) from two DC-3 aircrafts could disperse approximately 7,540 barrels of oil.

If the conditions are appropriate, and the necessary approvals and permits have been obtained, in-situ burning may be utilized. Based on in-situ burn operations during Deepwater Horizon, approximately 5% (1,750 bbls) of the total initial worst case discharge could be burned.

Although unlikely in a spill lasting thirty (30) days, potential shoreline impacts in Cameron Parish, Louisiana, Matagorda County, Texas, and/or Galveston County, Texas could occur depending on environmental conditions (wind, currents and temperature) at the time of an incident. Nearshore response may include the use of shoreline boom on beach areas, or protection/sorbent boom on vegetated areas. Surveillance and real time trajectories would aide in determining the most appropriate strategies to respond to a spill.

Table I.3 provides an example of offshore and nearshore equipment, response times, and personnel to respond to a spill of 23,453 bbls, which is the estimated amount that would remain considering natural evaporation/dispersion at 24 hours. This amount could be further reduced

through the application of aerial and subsea dispersants, and in-situ burning provided such applications/actions were approved.

Anadarko's contingency plan for dealing with this worst-case discharge would be to activate its Spill Management Team and equipment resources as described in its Gulf of Mexico Regional Oil Spill Response Plan (OSRP) and provide continuous support for the duration of the event. Response resources are activated and supplemented according to need. These resources would remain engaged in the response until the incident is deemed complete or until released by Unified Command.

Anadarko is a member of the Marine Well Containment Company (MWCC), which provides access to containment response capabilities and includes subsea dispersant injection equipment.

In the event of a blowout, Anadarko may:

- 1. Evacuate personnel, if necessary. Deploy emergency responders in an effort to preserve human life, if necessary.
- 2. Assess the damage and attempt to stop the flow at the source, if safe to do so, to reduce the amount of oil discharged.
- 3. Notify agencies.
- 4. Assess the amount of oil that has been spilled and calculate additional potential of oil flow. A continuous aerial surveillance program would be used to assess the growth of the slick and the volume of oil on the water. Observations of the size of the slick on the water, combined with observations at the source, would be used to provide a constant update. Additional potential to release fuel from the remaining tanks onboard the drilling rig would be determined by marine surveyors. Operations and Unified Command would continue to assess the adequacy of response equipment capacities based on this continually updated mass balance.
- 5. Convene the Spill Management Team (SMT). Organize Unified Command and establish objectives and priorities.
- 6. Monitor the oil spill with aerial surveillance and obtain trajectories. If oil is seaward bound, going away from land, discuss additional strategies with Unified Command.
- 7. If oil is moving in the direction of a shoreline and weather conditions are favorable, request approval to utilize dispersants.
 - a. Prior to commencing application operations, conduct an on-site survey in consultation with natural resource specialists to determine if any threatened or endangered species are present in the projected application area or otherwise at risk from dispersant application.

- b. Upon approval, mobilize one Basler aircraft and two DC-3 aircrafts from Houma, with surveillance aircraft and spotter. Rotate aircraft, spraying the leading edge of the spill and working back to the source. Monitor/sample for effectiveness (USCG SMART Team). Truck additional dispersants from CGA or MSRC stockpile if necessary.
- c. Dispersants are most effective when applied as soon after discharge as possible, since weathering of the oil decreases dispersant effectiveness. The estimated window of opportunity for most effective use of dispersants is within 48-72 hours post-release. The oil may still be dispersible after 72 hours on the water surface, but the effectiveness of dispersant use would likely be diminished after the oil has been on the water for more than three days. Ultimately, the USCG SMART monitoring protocol will be used to determine whether or not dispersant operations are effective.
- d. Once the CGA HOSS barge is on location and in the skimming mode, dispersants would only be used if required and approved.
- 8. Deploy offshore mechanical oil containment and recovery equipment. Attempt to recover as much oil at sea as possible, utilizing:
 - a. The CGA HOSS barge, will be positioned in a stationary mode, will be situated downwind and down-current from location for long-duration, high-volume skimming. Based on average travel times, the HOSS barge could be on location within approximately 48 hours of the release. The de-rated skimming capacity of the HOSS barge is 43,000 bbls per day. However, only the oil encountered by a skimmer can be recovered. In order to maximize oil encounter rate, boom will be deployed in a V-configuration in front of the HOSS barge to funnel oil to the skimmers. If necessary, temporary barges can be activated to support continuous skimming operations. (These barges arrive on-site at approximately the same time as the HOSS barge.) For an on-going release, multiple barges are deployed to provide for continuous off-loading of skimmer storage vessels and shuttling of recovered oil to an onshore waste handling facility. Sufficient barges are available to provide enough temporary storage for continuous recovery operations.
 - b. CGA's Fast Response Units (FRU) would arrive on-scene between approximately 20-25 hours of the initial release. These skimmers operate downstream of the HOSS barge and are used to recover pockets and streamers of oil that may move past the large stationary skimmer. The FRU's has approximately 200 barrels of on-board storage. Approval will be requested to decant water after gravity separation, through a hose forward of the skimmer, to optimize temporary storage capacity. Auto boom will be utilized to concentrate oil so that it is thick enough to be skimmed.
- 9. Dispersants, Fast Response Units (FRU), Oil Spill Response Vessels (OSRV or R/V) would typically work daylight hours only. The HOSS barge can operate continuously, including night operations. Available technology will be considered such as remote sensing devices that will enable 24 hour surveillance, trajectories, and planning. All response vessels are designed to be able to remain offshore continuously throughout the

response. Even if sea conditions prohibit effective skimming, these resources would remain offshore until skimming operations could be commenced again. Safety would remain the first priority.

- 10. Prepare site-specific Waste Management Plan, Site Safety Plan, Decontamination Plans, Communications and Medical Plans.
- 11. If oil becomes a threat to any shoreline, data from the aerial surveillance, weather reports, and trajectories would be used to direct onshore teams to deploy protection/containment boom with reference to Area Contingency Plans and in coordination with State and Federal On-Scene Coordinators.
 - a. Implement pre-designated strategies.
 - b. Identify resources at risk in spill vicinity.
 - c. Develop/implement appropriate protection tactics.
- 12. Establish site-specific Wildlife Rescue and Rehabilitation Plan.

The following types of additional support may be required for a blowout lasting 120 days.

- Additional Oil Spill Removal Organization (OSRO) personnel to relieve equipment operators
- Vessels for supporting offshore operations
- Field safety personnel
- Continued surveillance and monitoring of oil movement
- Helicopter, video cameras
- Infra-red (night time spill tracking) capabilities, X-band radar
- Barge to transport recovered oil from offshore skimming system, and temporary storage barges to onshore disposal sites that are identified in Area Contingency Plans (ACP)
- Logistics needed to support equipment:
 - Staging areas
 - Parts, trailers, and mechanics to maintain skimmers and boom
 - Fueling facilities
 - Decontamination stations
 - Dispersant stockpile transported from Houston to Houma or other potential command post locations
 - Communications equipment and technicians
- Logistics needed to support responder personnel
 - Medical aid stations
 - Safety personnel
 - Food
 - Berthing
 - Additional clothing/safety supplies
 - Decontamination stations

Louisiana CZM Containment Response Information

Anadarko has the capability to respond and contain, to the maximum extent practicable as defined in 30 CFR 254.6 and 30 CFR 250.26(d)(1), to the estimated worst case discharge (WCD) associated with the proposed activity within 30 days. Deployment time for surface containment equipment is subject to availability and location, weather conditions, potential security zones around the spill site, and site/well specific assessment data. Personnel safety is always first and foremost. Refer to further details on equipment and timing provided in **Section I–Oil Spill Information** and **Table I-3** of the DOCD.

There will be no new or unusual technology deployed that has not been previously deployed for Gulf of Mexico oil spill prevention, control, and/or cleanup.

Table I-1

Worst Case Discharge Calculation
(Based on Blowout during Production Operations)

Calcul	ations for Uncontrolled Blowout> 10 miles from shore:	Block 875
i.	Type of Oil (crude, condensate, diesel)	Crude
ii.	API Gravity	31.0°
iii.	DOCD Location Used for KC 875 WCD	Well #001 ST01
iv.	Largest Anticipated WCD Rate during blowout	35,000 BOPD
V.	WCD Total for Production Operations for KC 875 (> 10 miles from shore):	35,000 BOPD

Table I-2

Trajectory by Land Segment

Following are the average conditional probabilities (expressed as percent chance) that an oil spill starting at a particular launch area will contact a land segment as included in the BOEM Oil Spill Risk Analysis Model (OSRAM) for the Western Gulf of Mexico. This information can be found on the BOEM website using 3/10/30 day potential impact, as applicable. The results are listed below.

		Launch		Conditio	nal Probab	ility (%)
Area/Block	OCS-G	Area	Land Segment and/or Resource	3	10	30
		Titea		days	days	days
Keathley Canyon	G21444,	29	Kennedy County, TX			1
Blocks 875, 918,	G32654,		Kleberg County, TX			1
919	G21447	Western	Aransas County, TX			1
		Planning	Calhoun County, TX			1
Production		Area	Matagorda County, TX			2
(213 miles from			Brazoria County, TX			1
shore)			Galveston County, TX			2
			Jefferson County, TX			1
			Cameron Parish, LA			2
			Vermilion Parish, LA			1

Table I-3

WCD Scenario Production Activities - Based on a single well uncontrolled blowout (213 miles from shore)

Keathley Canyon Blocks 875, 918, and 919 35,000 BOPD (initial volume) 23,453 BOPD (after evaporation/dispersion)

API Gravity 31.0°

Offshore Equipment from Spill Detection to Equipment Deployment Response Time: Keathley Canyon Blocks 875, 918, and 919

		Dispersar	st Sto	rage	Persons	urveillance	Hrs to	Hrs to			Total	1	
Dispersant/Surv	eillance	Capacity (g		acity	Req.	From	Procur		t	to site	Hrs		
					CGA	-,							
Basler 67T		2000		VA	22	Houma]1_	_11_	0	.9	2.9	-	
	,				ASI							_	
DC 3		1200		NA	2	Houma					3.1	-	
Aero Commander		1200 NA		NA	2	Houma				9	3.1	-	
Aero Commander		INA				Houma	J '		1 0	.9	2.9	4	
					fshore Re	sponse							
Offshore Equipment Pre-determined Staging	EDRC	Storage Capacity	VOO		sons eq.	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Spill S		Hrs to Deploy	Total Hrs
	a street and a street				C	GA							
HOSS Barge	43000	4000	3 Tugs		5	Harvey	7	0	5	15.0		1	28.0
Boom Barge (CGA-3000	NA	NA	1 Tug		arge)	Leeville	4	0	6	18.6	7-	1.5	30.1
42" Auto Boom (25000')		10.	50 Crew		r Crew)					,0	1J.	1.0	30.1
				Marine (available th	rough contrac	t with CGA)						
Koseq Skimming Arms (5)	89145	10000	5 Utility		30	Galveston	44	12	4	23.3		_2	45.3
Koseq Skimming Arms (3)	53487	6000	3 Utility		18	Leeville	44	12	10	10.8		2	38.8
Koseq Skimming Arms (1)	17829	2000	1 Utility		6	Fourchon	4	12	9.5	10.8		_2	38.3
Koseq Skimming Arms (2)	35658	4000	2 Utility		12	Venice	4	12	11	11.7	J_	_2	40.7
				ne Servi	ces LLC (a	vailable throug	gh contract v						
CTCo 2604	NA	20000	1 Tug		6	Amelia	4	12	44	18.1		_1	39.13
CTCo 2605	NA	20000	1 Tug		6	Amelia	4	12	4	18.1		_1	39.13
CTCo 2606	NA_	20000	1 Tug		6	Amelia	44	12	4	18.1		_1	39.13
CTCo 2607	NA	23000	1 Tug		6	Amelia	4	12	4	18.1		_1	39.13
CTCo 5001	NA	47000	1 Tug		6	Amelia	4	12	4	18.1	3	_1	39.13
<u></u>				perating	g (available	through contr	act with CG				=		C 5-7-3
Pacific 996165	NA	80000	1 Tug		6	Fourchon	4	12	2	16.2		_1	35.25
DBL 76 1212984	NA	83937	1 Tug		6	Fourchon	4	12	2	16.2		_1	35.25
DBL 101 1119760	NA	107285	1 Tug		6	Fourchon	4	12	2	16.2	5	1	35.25

Spill Team Area Responders (STARS) called out by Marine Spill Response Corporation (MSRC) Vessel of Opportunity=VOO EMS=Enterprise Marine Services K-Sea=K-Sea Operating Partnership

Offshore Equipment Pre-determined Staging	EDRC	Storage Capacity	VOO	Persons Required	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Travel to Spill Site	Hrs to Deploy	Total Hrs
					MSRC				-		
Louisiana Responder Transrec 350 + OSRV 2,640' 44" Sea Sentry II Boom 5,280' 67" LAMOR	10567	4000	NA	14	Fort Jackson	2	0	ī	5.6	1	9.6
MSRC 452 Offshore Barge 1 Crucial Disk 88/30 1,980' 44" Sea Sentry II Boom 660 ' 67" LAMOR	11122	45000	3 Tugs	6	Fort Jackson	2	0	2	20	1	25
Mississippi Responder Transrec 350 + OSRV 5,280' 44" Sea Sentry II Boom 2,640' 67" LAMOR	10567	4000	NA	14	Pascagoula	2	0	1	10	1	14
MSRC 402 Offshore Barge 2 Crucial Disk 88/30 660' 44" Sea Sentry II Boom 1,980' 67" LAMOR	22244	40300	3 Tugs	6	Pascagoula	2	0	2	35.7	1	40.7
Deep Blue Responder LFF 100 Brush + OSRV 6,600' 44" Sea Sentry II Boom 660' 67" LAMOR	18086	4000	NA	14	Fourchon	2	0	1	5.2	1	9.2
PSV – HOS Centerline 1 Crucial Disk 88/30 1,320' EFC (cont inflate)	11122	24300	NA	14	Fourchon	12	12	1	10.8	1	36.8
PSV – HOS Strongline 1 Crucial Disk 88/30 1,320' EFC (cont inflate)	11122	24300	NA	14	Fourchon	12	12	1	10.8	1	36.8
PSV – C-Freedom 1 LFF 100 Brush 1,320' EFC (cont inflate)	18086	11756	NA	14	Fourchon	12	12	1	10.8	1	36.8
MSRC Lightning 2 LORI Brush Pack	5000	50	3 Tugs	6	Tampa	2	0	2	20	1	25
MSRC 360 Offshore Barge 1 Crucial Disk 88/30 1,320' 44" Sea Sentry II Boom	11122	36000	3 Tugs	6	Tampa	2	0	2	71.4	1	76.4

Offshore Equipment Pre-determined Staging	EDRC	Storage Capacity	VOO	Persons Required	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Travel to Spill Site	Hrs to Deploy	Total Hrs
					MSRC						
Gulf Coast Responder Transrec 350 + OSRV 5,280' 44" Sea Sentry II Boom 2,640' 67" LAMOR	10567	4000	NA	14	Lake Charles	2	0	1	9.2	1	13.2
Texas Responder Transrec 350 + OSRV 4,620' 44" Sea Sentry II Boom 3,300' 67" LAMOR	10567	4000	NA	14	Galveston	2	0	1	11.2	1	15.2
MSRC 570 Offshore Barge 2 Crucial Disk 88/30 2,640' 44" Sea Sentry II Boom	22244	56900	3 Tugs	6	Galveston	2	0	2	40	1	45
Southern Responder Transrec 350 + OSRV 4,290' 44" Sea Sentry II Boom 2,970' 67" LAMOR	10567	4000	NA	14	Ingleside	2	0	1	15.2	1	19.2
MSRC 403 Offshore Barge 1 Crucial Disk 88/30 660' 44" Sea Sentry II Boom 660' 67" LAMOR	11122	40300	3 Tugs	6	Ingleside	2	0	2	54.3	1	59.3
MSRC Quick Strike 2 LORI Brush Pack	5000	50	3 Tugs	6	Ingleside	2	0	2	15.2	1	20.2

Offshore Equipment Preferred Staging	EDRC	Storage Capacity	voo	Persons Req.	From	Hrs to Procure	Hrs to Loadout	Travel to Staging	Travel to Site	Hrs to Deploy	Total Hrs
			T&T Marine	(Available	through contract wi	th CGA)					
Aqua Guard Triton RBS (2)	45560	4000	2 Utility	12	Galveston	4	12	6	23.3	1	46.3
					CGA						
FRU (1) + 100 bbl Tank (2)	4251	200	1 Utility	6	Galveston	1	2	6	10.0	1	20.0
FRU (1) + 100 bbl Tank (1)	4251	100	1 Utility	6	Harvey	1	2	1.25	10.0	1	15.3
FRU (1) + 100 bbl Tank (2)	4251	200	1 Utility	6	Ingleside	1	2	9	10.0	1	23.0
FRU (1) + 100 bbl Tank (2)	4251	200	1 Utility	6	Lake Charles	1	2	3	10.0	1	17.0
FRU (2) + 100 bbl Tank (2)	8502	400	2 Utility	12	Leeville	1	2	1.25	10.0	1	15.3
FRU (1) + 100 bbl Tank (2)	4251	200	1 Utility	6	Morgan City	1	2	0.75	10.0	1	14.8
FRU (2) + 100 bbl Tank (4)	8502	400	2 Utility	12	Venice	1	2	3	10.0	1	17.0
				/N	ISRC						
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Ingleside	1	2	9.5	10.8	1	24.3
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Galveston	1	2	7	10.8	1	21.8
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Lake Charles	1	2	4	10.8	1	18.8
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Fourchon	1	2	0	10.8	1	14.8
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Fort Jackson	1	2	3.75	10.8	1	18.55
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Pascagoula	1	2	4	10.8	1	18.8
Stress I (1) + Storage Bladder	15840	500	1 Utility	6	Tampa	1	2	13	10.8	1	27.8
LFF 100 Brush (1) + Storage Bladder	18086	500	1 Utility	6	Lake Charles	1	2	4	10.8	1	18.8
LFF 100 Brush (2) + Storage Bladder	36172	6000	2 Utility	12	Fourchon	1	2	0	10.8	1	14.8
Crucial Disk 88/30 + Storage Bladder	11122	500	1 Utility	6	Fourchon	1	2	0	10.8	1	14.8
GT-185 w Adap + Storage Bladder	1371	500	1 Utility	6	Fourchon	1	2	0	10.8	1	14.8
Desmi Ocean + Storage Bladder	3017	500	1 Utility	6	Fort Jackson	1	2	0	10.8	1	14.8
Foilex 200 + Storage Bladder	1989	500	1 Utility	6	Fort Jackson	1	2	0	10.8	1	14.8

Offshore Equipment Preferred Staging	EDRC	Storage Capacity	voo	Persons Req.	From	Hrs to Procure	Hrs to Loadout	Travel to Staging	Travel to Site	Hrs to Deploy	Total Hrs
				CG	A						
Hydro-Fire Boom	NA	NA	8 Utility	40	Harvey (HFB)	1	4	1.25	10.0	6	22.3
				MSF	RC						
44" Sea Sentry II Boom (2860')	NA	NA	6 Crew	12	Ingleside	1	2	9.5	10.8	1	24.3
44" Sea Sentry II Boom (4290')	NA	NA	10 Crew	20	Galveston	1	2	7	10.8	1	21.8
44" Sea Sentry II Boom (6679')	NA	NA	10 Crew	20	Lake Charles	1	2	4	10.8	1	18.8
44" Sea Sentry II Boom (1980')	NA	NA	6 Crew	12	Fort Jackson	1	2	3.75	10.8	1	18.55
44" Sea Sentry II Boom (3190')	NA	NA	10 Crew	20	Pascagoula	1	2	4	10.8	1	18.8
2000' Hydro-Fire Boom	NA	NA	16 Utility	80	Lake Charles	1	2	4	10.8	1	18.8

Nearshore Equipment from Spill Detection to Equipment Deployment Response Time: Keathley Canyon Blocks 875, 918, and 919

Nearshore Equipment Pre-determined Staging	EDRC	Storage Capacity	voo	Persons Required	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Travel to Site	Hrs to Deploy	Total Hrs
re-determined oldging		oupdony		required	CGA	Trocure	Loudout		to one	Deploy	1113
46' FRV	5000	65	NA	4	Galveston	1	0	0	11.2	0	12.2
46' FRV	5000	65	NA	4	Leeville	1	0	2	5.2	0	8.2
46' FRV	5000	65	NA	4	Lake Charles	1	0	1	9.2	0	11.2
46' FRV	5000	65	NA	4	Venice	1	0	1	5.6	0	7.6
Trinity SWS	21500	249	NA	4	Galveston	1	2	2	11.2	0	16.2
Trinity SWS	21500	249	NA	4	Leeville	1	2	2	5.2	0	10.2
Trinity SWS	21500	249	NA	4	Morgan City	1	2	2	5.2	0	10.2
Trinity SWS	21500	249	NA	4	Venice	1	2	2	5.6	0	10.6
			K-Sea	Operating (av	ailable through cor	ntract with Co	GA)				
DBL 82 1137538	NA	86948	1 Tug	6	Houma	4	12	2	16.88	1	35.88
		Ente	rprise Ma	rine Services	LLC (available thro	ugh contract	with CGA)				
CTCo 2603	NA	25000	1 Tug	6	Amelia	4	12	4	18.13	1	39.13
CTCo 2608	NA	23000	1 Tug	6	Amelia	4	12	4	18.13	1	39.13
CTCo 2609	NA	23000	1 Tug	6	Amelia	4	12	4	18.13	1	39.13

Nearshore Equipment Preferred Staging	EDRC	Storage Capacity	voo	Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs
					CGA						
NS Egmopol	3000	100	NA	3	Galveston	1	2	6.5	2	0	11.5
VS Egmopol	3000	100	NA	3	Morgan City	1	2	1.8	2	0	6.8
VS Marco	3588	20	NA	3	Lake Charles	1	2	4	2	0	9
WS Marco	3588	34	NA	3	Leeville	1	2	.3	2	0	5.3
оре Мор	77	2	0	3	Harvey	1	2	2	2	0	7

Nearshore Equipment Preferred Staging	EDRC	Storage Capacity	VOO	Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs
•				MS	RC						
Foilex 250 Skimmer+ Storage Bladder	3977	500	1 Crew	3	Fort Jackson	2	.5	3	2	.5	8
Foilex 250 Skimmer+ Storage Bladder	3977	500	1 Crew	3	Lake Charles	2	.5	4	2	.5	9
Foilex 250 Skimmer+ Storage Bladder	3977	500	1 Crew	3	Galveston	2	.5	6.5	2	.5	11.5
Foilex 250 Skimmer+ Storage Bladder	3977	500	1 Crew	3	Ingleside	2	.5	9	2	.5	14
WP-1 Skimmer+ Storage Bladder	3017	500	1 Utility	3	Ingleside	2	.5	9	2	.5	14
Aardvac 800 Skimmer+ Storage Bladder	3840	500	NA	3	Pascagoula	2	.5	3.5	2	.5	8.5

Shoreline Protection Boom	VOO	Persons Req.	Storage/Warehouse Location		Hrs to Procure	Hrs to					Total Hrs
				OMI Enviror	nmental (availa	ole through I	MSA)				SP 9195 1-0126 1-01
10,000' 18" Boom	4 Crew	10	New Iberia, LA		1	1	3.5	2	3		10.5
10,000' 18" Boom	4 Crew	10	Hous	ston, TX	1	1	7	2	3	3	
10,000' 18" Boom	4 Crew	10	Port Arthur, TX		1	1	5.75	2	3		12.75
20,000' 18" Boom	8 Crew	20	Belle C	hasse, LA	1	1	3	2	6		13
10,000' 18" Boom	4 Crew	10	Port	Allen, LA	1	1	3.5	2	3		10.5
10,000' 18" Boom	4 Crew	10	Hou	ıma, LA	1	1	2	2	3		9
15,000' 18" Boom	6 Crew	14	Gretna, LA	(Warehouse	e) 2	2	2.75	2	4		12.75
				AMPO	L (available thi	ough MSA)					
42,000' 18" Boom	16 Crew	40	New	beria, LA	2	2	3.5	2	12		21.5
20,000' 18" Boom	8 Crew	20	New O	rleans, LA	2	2	2.75	2	6		14.75
					ES&H						
0,000' 18" Shoreline	20 Crew	50	Hou	ston, TX	.5	.5	7	2	15	5	25
0,000' 18" Shoreline	20 Crew	50	Lake C	harles, LA	.5	.5	5	2	15	;	23
0,000' 18" Shoreline	8 Crew	20	New Iberia, LA		.5	.5	3.5	2	6		12.5
1,000' 18" Shoreline	2 Crew	6	Morgan City, LA		.5	.5	2.5	2	1		6.5
0,000' 18" Shoreline	8 Crew	20	Belle Chasse, LA		.5	.5	3	2	6		12
5,000' 18" Shoreline	6 Crew	14	Mobile, AL		.5	.5	5	2	4		12
5,000' 18" Shoreline	2 Crew	6	Dallas Ft. Worth, TX		.5	.5	9.75	9.75 2			14.75
0,000' 18" Shoreline	20 Crew	50	Hou	ıma, LA	.5	.5	2	2	15		20
Beach Boom	EDR	C Stora		Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs
Beach Boom (2000')	- NA	NA NA	NA	6	CGA Galveston	1		6	,	2	12
Beach Boom (1000')	NA										
Beach Boom (1000')	NA			6	Ingleside Pascagoula		2	9 3	'	2	15 9

Wildlife Response	EDRC	Storage Capacity	VOO	Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs
					CGA						
Wildlife Support Trailer	NA	NA	NA	2	Houma	1	2	0	11	2	6
Bird Scare Guns (24)	NA	NA	NA	2	Belle Chasse	1	2	1.25	1	2	7.25
Bird Scare Guns (12)	NA	NA	NA	2	Galveston	1	2	6	1	2	12
Bird Scare Guns (24)	NA	NA	NA	2	Houma	1	2	0	1	2	6
Bird Scare Guns (12)	NA	NA	NA	2	Ingleside	1	2	9	1	2	15
Bird Scare Guns (24)	NA	NA	NA	2	Lake Charles	1	2	3	1	2	9
Bird Scare Guns (24)	NA	NA	NA	2	Pascagoula	1	2	3	1	2	9
				Response	Asset		Total				
		Offshore EDRC					704,680				
		Offshore Recovered Oil Storage					747,878				
		Nearshore / Shallow Water EDRC					142,018				
		Nearshore / Shallow Water Recovered Oil Storage				ge	162,460				

^{*}Some equipment may be used offshore up to approximately 25 miles from shore

I-3 (continued)

Operational Limitations of Response Equipment

- HOSS Barge-8 foot seas
- Fast Response Unit (FRU)–8 foot seas
- Oil Spill Response Vessel (OSRV and R/V)-4 foot seas
- Boom-3 foot seas, 20 knot winds
- Dispersants—winds more than 25 knots, visibility less than 3 nautical miles or ceiling less than 1,000 feet

Environmental Monitoring Information

(a) Monitoring Systems

Anadarko Petroleum Corporation will monitor loop currents per NTL 2005-G05.

Anadarko subscribes to Wilkens Weather Service which provides real-time weather conditions such as tropical depressions, storms and/or hurricanes entering the Gulf.

(b) Incidental Takes

Although marine mammals may be seen in the area, Anadarko does not believe that its operations proposed under this DOCD will result in the harassment, capture, collection or killing of any mammals covered by the Marine Mammal Protection Act.

Anadarko will operate in accordance with applicable regulations and guidance, including:

*NTL No. 2016-G02 – "Implementation of Seismic Survey Mitigation Measures and Protected Species Observer Program"

*BSEE NTL No. 2015-G03 "Marine Trash and Debris Awareness and Elimination", and

*JOINT NTL No. 2016-G01 "Vessel Strike Avoidance and Injured/Dead Protected Species Reporting"

(c) Environmental Mitigation Measures

The Environmental Impact Analysis in Section P of this plan further discusses potential impacts and mitigation measures related to threatened and endangered species.

This DOCD does not propose activities for which the State of Florida is an affected State. Therefore, the discussion required per NTL 2008-G04 is not applicable to this DOCD.

K LEASE STIPULATIONS INFORMATION

Keathley Canyon Blocks 875 and 919, Lease Sale # 174:

Keathley Canyon Blocks 875 and 919 are not located in a Biologically Sensitive Area, Military Warning Area, or Shipping Fairway.

Marine Protected Species: This stipulation requires operators to collect and remove flotsam resulting from their activities; to post signs detailing why release of debris must be eliminated; watch for protected marine mammals and see turtles (includes speed and distance parameters if mammals or turtles are sited); reports sightings and locations of dead or injured marine mammals or turtles and if the operators activities are responsible remain available to assist in the recovery and comply with applicable mitigation measures when conducting seismic operations. It also requires operators to comply with applicable Notices to Lessees which contain further restrictions regarding protection of marine mammals and turtles.

Keathley Canyon Block 918, Lease Sale # 206:

Protected Species Stipulation: This stipulation requires operators to collect and remove flotsam resulting from their activities; to post signs detailing why release of debris must be eliminated; watch for protected marine mammals and see turtles (includes speed and distance parameters if mammals or turtles are sited); reports sightings and locations of dead or injured marine mammals or turtles and if the operators activities are responsible remain available to assist in the recovery and comply with applicable mitigation measures when conducting seismic operations. It also requires operators to comply with applicable Notices to Lessees which contain further restrictions regarding protection of marine mammals and turtles.

All activities will be conducted in accordance to BSEE NTL 2015-G03 "Marine Trash and Debris Awareness Training and Elimination" and BOEM NTL 2016-G01 "Vessel Strike Avoidance and Injured/Dead Protected Species Reporting".

(a) Related OCS Facilities and Operations

The Keathley Canyon (KC) 919 SS009 (or alternate well KC 875 SS005 or KC 918 SS003) will be equipped with a subsea wellhead and subsea tree rated for 10,000 psi and will be tied back to an existing East subsea manifold located in KC 875 with a 6-in well jumper with an internal pressure rating of 11,460 psi with an expected MAOP of 9300 psi. The well will be controlled with an existing electro-hydraulic umbilical. No other modifications to the approved system are proposed. From the existing subsea manifold, production will be transported via existing flowlines to the existing Lucius Spar in KC Block 875. The existing topside boarding valve is rated for 10,000 psi and will shut-in within 45 seconds. No modifications to the existing host facility are needed to accommodate this production. A pipeline application will be submitted for the well jumper.

The KC 918 SS01 ST02 will be equipped with a subsea wellhead and subsea tree rated for 10,000 psi and will connected to a new PLEM located in KC 919 with a 6-in well jumper with an internal pressure rating of 11,460 psi with an expected MAOP of 9300 psi. A 6-in infield flowline will connect the PLEM to a new manifold to be installed in KC 919. The KC 919 SS008 will be equipped with a subsea wellhead and subsea tree rated for 10,000 psi and connect to the new manifold to be installed in KC 919 via a 6-in well jumper. From the new KC 919 subsea manifold, two 8-in infield pipelines will transport the production to the existing KC 875 east manifold. The production will then be transported via existing pipelines to the existing Lucius Spar in KC Block 875. The design maximum flowrate through the proposed pipelines is 20,000 BOPD. The existing topside boarding valve is rated for 10,000 psi and will shut-in within 45 seconds. No modifications to the existing host facility are needed to accommodate this production. Both of these wells will be controlled with a new infield electro-hydraulic umbilical to be installed in KC 919 and connected back to the existing main umbilical. A pipeline application will be submitted for the proposed pipelines and umbilical.

(b) Transportation System

The five proposed wells in this plan will flow to the Lucius Spar from the East manifold located in KC 875 through existing lease term pipelines, S-18488 and S-18489. The gas will then depart the platform via a 16-inch export riser (S-18664) operated by APC to a PLET located in KC 831 that ties into an existing 20-inch pipeline (S-18711) operated by Discovery Producer Services, LLC. The pipeline goes to an existing junction platform in ST 283. From the junction platform, the gas will travel via an existing 12-inch pipeline (S-18710) to a subsea tie-in located in ST 280 to an existing pipeline operated by Discovery Gas Transmission which will bring the gas to shore. No modifications to the existing gas export pipeline system are needed due to the proposed wells in this plan.

The oil will depart the platform via a 16-inch export riser (S-18663) operated by APC to a PLET located in KC 831 tying into an 18-inch OD pipeline (S-18606) operated by Southeast Keathley Canyon Pipeline Company, LLC. The oil will travel to an existing platform in South Marsh Island Block 205, Platform A. From there, it will tie into existing infrastructure going to shore. No modifications to the existing oil export pipeline system are needed due to the wells proposed in this plan.

(c) Produced Liquid Hydrocarbons Transportation Vessels

No produced liquid hydrocarbons are anticipated to be transported by means other than a pipeline for the activities proposed as a part of this plan.

(d) Decommissioning Information

Subsequent to applicable lease expirations, abandonment activities will be conducted in accordance with all state and federal regulations.

M Support Vessels and Aircraft Information

(a) General

Туре	Max. Total Fuel Tank Storage Capacity	Max. No. in Area at any Time	Trip Frequency or Duration
Supply Vessel	336,227 gallons	2	10 days total each (2019)
Helicopter	735.3 gallons	1	10 trips/week
Crew Vessel	70,000 gallons	1	3 trips/week during completion ops only (2018)
Work/Supply Boat	70,000 gallons	1	2 trips/week during completion ops only (2018)
DP Support Vessel	450,698 gallons	1	3 days total during completion ops only (2018)
ROV Boat/ DP Construction Vessel	241,408 gallons	1	15 days in 2018, 10 days in 2019
Reeled Pipe-Lay Vessel	528,344 gallons	1	7 days (2019)
Umbilical Lay Vessel w. Carrousel	528,344 gallons	1	7 days (2019)
ROV Boat w. Crane	241,408 gallons	1	32 days (2019)

(b) Diesel Oil Supply Vessels

Fuel for the DP Construction Vessel and MODU will be transported via a supply vessel as follows:

a. Size of fuel supply vessel:	230 feet
b. Carrying capacity of fuel supply vessel:	336,227 gallons
c. Frequency that fuel supply vessel will visit the facilities:	twice per week
d. Routes the fuel supply vessel will use to travel between the onshore support base and proposed facility:	Shortest route from shore-base to block

(c) Produced Liquid Hydrocarbons Transportation Vessels

Produced liquid hydrocarbons from a future flow tests on the Keathley Canyon Block 918 #001 ST02 will be transported by 1-2 flowback vessels. Anadarko will flare a max volume during the 48-hour flow test period.

Discussions regarding geologic information are considered proprietary and have been omitted from this section of the public copy DOCD.

(d) Summary of Method to Transfer Liquid Hydrocarbons to the Transporting Vessel

Production from the well will be routed through portable surface well test equipment and safety controls aboard the rig. Gas will be flared and liquids (oil & water) will be collected in US Coast Guard approved tanks and a boat/barge. Each well will be produced / cleaned up and measured using various meters through portable surface well test equipment. A three phase separator will be used to analyze water cut if present. All liquids (hydrocarbons and water) will then be transferred to a coast guard approved barge via tested & approved petroleum transfer hose. We will have a Safe Breakaway Coupling (KLAW) installed between the hoses connecting the barge-end and the rig-end. If this device parts the KLAW is designed to contain all fluids from both hoses.

(e) Solid and Liquid Wastes Transportation

Type of Waste	Composition	Total Projected Amount	Rate	Transport Method	Name/Location of Facility	Disposal Method
Synthetic- based drilling fluid or mud	Synthetic- based drilling muds	N/A	N/A	Re-use and/or transport to shore in DOT approved containers.	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Newpark Fourchon Transfer Station #1 & #2. Newpark Transfer Station Morgan City. Newpark Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station. If recycled, returned to vendor (Bariod or MI).	Re-used and/or recycled; if can't be reused and/or recycled the waste is disposed of at an approved waste disposal facility, such as Newpark (injection disposal facility) or USLL (landfarm).
Cuttings wetted with synthetic- based muds	Cuttings coated with synthetic drilling muds, including drilled out cement	N/A	N/A *An estimated 5-10% of cuttings may be transported to shore	Re-use and/or transport to shore in DOT approved containers.	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Newpark Fourchon Transfer Station #1 & #2. Newpark Transfer Station Morgan City. Newpark Transfer Station Port Arthur. USLL Galveston	Re-used and/or recycled; if can't be reused and/or recycled the waste is disposed of at an approved waste disposal facility, such as Newpark (injection disposal facility) or USLL (landfarm).

					and Fourchon Transfer Station. If recycled, returned to vendor (Bariod or MI).	
Produced Sand	Oil- contaminated formation sand	250 bbls/ year	50 bbls/ well/year	Transport in DOT approved containers by vessel to shorebase for pickup.	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Newpark Fourchon Transfer Station #1 & #2. Newpark Transfer Station Morgan City. Newpark Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station. If recycled, returned to vendor (Bariod or MI).	Disposed of at an approved waste disposal facility, such as Newpark (injection disposal facility) or USLL (landfarm).
Chemical product waste (well treatment fluids)	Ethylene glycol Methanol Xylene* Diesel* *An estimated 5-10% of product total volume used during ops is sent back to shore for disposal. Volume shown reflects volume to be disposed of.	376.29 bbls 93.79 bbls 1883.7 bbls 250 bbls/ year	100 bbls/month 25 bbls/month 50 bbls/well/year 50 bbls/well/year	Transport to shore in DOT approved containers by vessel for pick up	An approved waste disposal facility will be utilized, such as Chemwaste in Sulphur, LA and Veolia Port Arthur, TX or to Ecosery, Port Arthur as non-hazardous waste.	Can be returned to vendor and/or used at another facility; MEG is solidified and disposed of in a landfill. Methanol is incinerated or used for fuels blending.
Completion/ Recompletion fluids	Brine, spent acid, prop sand, debris, gelled fluids, dead oil	15,000 bbls	3,000 bbls/well	Transport to shore in DOT approved containers and/or vessel tanks by vessel for pick up	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Ecoserv Fourchon Transfer Station #1 & #2. Ecoserv Transfer Station Morgan City. Ecoserv Transfer Station Port	Unused brine can be returned to vendor and/or stored for use on another job. Used brine and spent acid is transferred to an approved waste disposal facility, such as Ecoserv's Processing & Transfer facility for injection.

					Arthur. USLL Galveston and Fourchon Transfer Station	
Workover fluids/ Stim fluids	Brine, spent acid, prop sand, debris, gelled fluids, dead oil	15,000 bbls	3,000 bbls/well	Transport to shore in DOT approved containers and/or vessel tanks by vessel for pick up	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Ecoserv Fourchon Transfer Station #1 & #2. Ecoserv Transfer Station Morgan City. Ecoserv Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station	Unused brine can be returned to vendor and/or stored for use on another job. Used brine and spent acid is transferred to an approved waste disposal facility, such as Ecoserv's Processing & Transfer facility for injection.
Trash and debris	Refuse generated during operations	60,000 lbs	12,000 lbs/well	Transport to shore in disposal bags by vessel to shorebase for pickup by municipal operations	An approved waste disposal facility will be utilized, such as Recycled Material in ARC, New Iberia, LA, or trash disposal at SWDI landfill.	Recycled and/or disposed in landfill.
Used oil	Excess oil from engines	300 bbls	60 bbls/ well	Transport in DOT approved containers to shore for pick up	An approved waste disposal facility will be utilized, such as American Recovery Fourchon, LA	Recycled

^{*}Total amounts assume operations associated with 5 wells will take 113 days total to complete

(f) Vicinity Map

A vicinity map is included in this section as Attachment M-1.

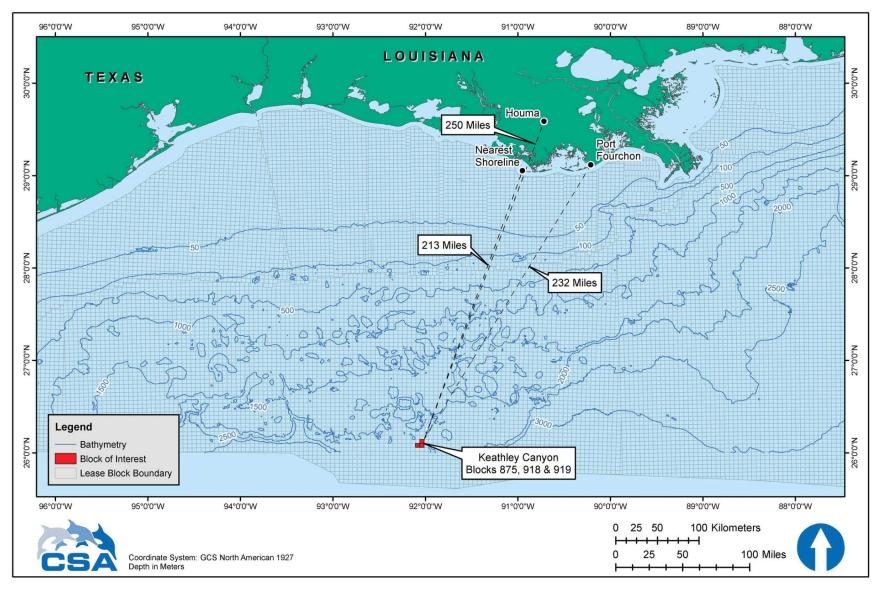


Figure 1. Location of Keathley Canyon Blocks 875, 918, and 919 in the Gulf of Mexico.

N ONSHORE SUPPORT FACILITIES INFORMATION

(a) General

Per NTL No. 2008-G04, the following tables reflect the onshore facilities Anadarko may utilize to provide supplies and service support for the activities proposed in this DOCD.

Name	Primary Location	Existing/New/Modified
Anadarko Service Base	Fourchon, Louisiana	Existing

Name	*Alternate Locations	Existing/New/Modified
Anadarko Service Base	Galveston, TX	Existing
Anadarko Service Base	Cameron, LA	Existing
Anadarko Service Base	Lake Charles, LA	Existing
Anadarko Service Base	Houma, LA	Existing
Anadarko Service Base	Pascagoula, MS**	Existing

^{*}In the unlikely event Anadarko's primary service base cannot be utilized Anadarko will exercise the use of an alternate service base during drilling and/or completion operations.

(b) Support Base

No support base construction or expansion is planned for these activities.

(c) Waste Disposal

Disposed wastes describe those wastes generated by the proposed activity that are disposed of by means other than by release into the water of the GOM at the site where they are generated. These wastes can be disposed of by offsite release, injection, encapsulation, or placement at either onshore or offshore permitted locations for the purposes of returning them back to the environment.

Type of Waste	Composition	Total Projected Amount	Rate	Transport Method	Name/Location of Facility	Disposal Method
Synthetic- based drilling fluid or mud	Synthetic- based drilling muds	N/A	N/A	Re-use and/or transport to shore in DOT approved containers.	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Newpark Fourchon Transfer Station #1 & #2. Newpark Transfer Station Morgan City. Newpark Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer	Re-used and/or recycled; if can't be reused and/or recycled the waste is disposed of at an approved waste disposal facility, such as Newpark (injection disposal facility) or USLL (landfarm).

^{**}Helicopter base only; location is approximately 93 miles from Pascagoula via most direct route

Cuttings wetted with synthetic- based muds	Cuttings coated with synthetic drilling muds, including drilled out cement	N/A	N/A *An estimated 5-10% of cuttings may be transported to shore	Re-use and/or transport to shore in DOT approved containers.	Station. If recycled, returned to vendor (Bariod or MI). An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Newpark Fourchon Transfer Station #1 & #2. Newpark Transfer Station Morgan	Re-used and/or recycled; if can't be reused and/or recycled the waste is disposed of at an approved waste disposal facility, such as Newpark (injection disposal facility) or USLL
Produced	Oil-	250 bbls/	50 bbls/	Transport	City. Newpark Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station. If recycled, returned to vendor (Bariod or MI). An approved waste	(landfarm). Disposed of at an
Sand	contaminated formation sand	year	well/year	in DOT approved containers by vessel to shorebase for pickup.	disposal facility will be utilized, such as Port Fourchon, LA and on to Newpark Fourchon Transfer Station #1 & #2. Newpark Transfer Station Morgan City. Newpark Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station. If recycled, returned to vendor (Bariod or MI).	approved waste disposal facility, such as Newpark (injection disposal facility) or USLL (landfarm).
Chemical product waste (well treatment fluids)	Ethylene glycol Methanol Xylene* Diesel* *An estimated 5-10% of product total volume used during ops is sent back to shore for disposal. Volume shown reflects volume to be disposed of.	376.29 bbls 93.79 bbls 1883.7 bbls 250 bbls/ year	100 bbls/month 25 bbls/month 50 bbls/well/year 50 bbls/well/year	Transport to shore in DOT approved containers by vessel for pick up	An approved waste disposal facility will be utilized, such as Chemwaste in Sulphur, LA and Veolia Port Arthur, TX or to Ecosery, Port Arthur as non-hazardous waste.	Can be returned to vendor and/or used at another facility; MEG is solidified and disposed of in a landfill. Methanol is incinerated or used for fuels blending.

Completion/ Recompletion fluids	Brine, spent acid, prop sand, debris, gelled fluids, dead oil	15,000 bbls	3,000 bbls/well	Transport to shore in DOT approved containers and/or vessel tanks by vessel for pick up	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Ecoserv Fourchon Transfer Station #1 & #2. Ecoserv Transfer Station Morgan City. Ecoserv Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station	Unused brine can be returned to vendor and/or stored for use on another job. Used brine and spent acid is transferred to an approved waste disposal facility, such as Ecoserv's Processing & Transfer facility for injection.
Workover fluids/ Stim fluids	Brine, spent acid, prop sand, debris, gelled fluids, dead oil	15,000 bbls	3,000 bbls/well	Transport to shore in DOT approved containers and/or vessel tanks by vessel for pick up	An approved waste disposal facility will be utilized, such as Port Fourchon, LA and on to Ecoserv Fourchon Transfer Station #1 & #2. Ecoserv Transfer Station Morgan City. Ecoserv Transfer Station Port Arthur. USLL Galveston and Fourchon Transfer Station	Unused brine can be returned to vendor and/or stored for use on another job. Used brine and spent acid is transferred to an approved waste disposal facility, such as Ecoserv's Processing & Transfer facility for injection.
Trash and debris	Refuse generated during operations	60,000 lbs	12,000 lbs/well	Transport to shore in disposal bags by vessel to shorebase for pickup by municipal operations	An approved waste disposal facility will be utilized, such as Recycled Material in ARC, New Iberia, LA, or trash disposal at SWDI landfill.	Recycled and/or disposed in landfill.
Used oil	Excess oil from engines	300 bbls	60 bbls/ well	Transport in DOT approved containers to shore for pick up	An approved waste disposal facility will be utilized, such as American Recovery Fourchon, LA	Recycled

^{*}Total amounts assume operations associated with 5 wells will take 113 days total to complete

O COASTAL ZONE MANAGEMENT ACT INFORMATION

STATE OF LOUISIANA

CONSISTENCY CERTIFICATION FOR

INITIAL DEVELOPMENT OPERATIONS COORDINATION PLAN

KEATHLEY CANYON BLOCKS 875, 918, AND 919 OCS-G21444, 32654, and 21447

The proposed activities described in detail in this OCS Plan comply with Louisiana's approved Coastal Zone Management Program(s) and will be conducted in a manner consistent with such Program(s).

Anadarko Petroleum Corporation

Jill Fower Certifying Official

April, 2018

TEXAS COASTAL MANAGEMENT PROGRAM

The following is an evaluation that includes findings relating the coastal effects of the proposed activities and associated facilities to the relevant enforceable policies of the Texas' Coastal Management Program (TCMP), Title 31, Part 16, Chapter 501, Subchapter B:

(Category 2)

Construction, Operation & Maintenance of Oil & Gas Exploration & Production Facilities

No operations are proposed in or near any critical areas. The proposed activities are explorative in nature, so no facility construction is proposed. The proposed activities are located approximately 260 miles from the Texas shoreline; therefore we expect no adverse impacts to CNRAs or beach access and use rights of the public. All activities shall be conducted in a manner that minimizes significant impacts to coastal resources. No adverse effects to Texas' coastal area are expected in association with the proposed activities.

(Category 3)

Discharges of Wastewater and Disposal of Waste from Oil and Gas Exploration and Production Activities

No discharge of wastewater or disposal of waste from the proposed activities will occur in the Texas' coastal zone; therefore no impact to Texas' coastal waters is expected.

(Category 4)

Construction and Operation of Solid Waste Treatment, Storage, and Disposal Facilities

No construction of solid waste facilities or expansion of existing facilities in the coastal zone are proposed in the attached plan, therefore, no adverse effects on any features of Texas' coastal cone are expected.

(Category 5)

Prevention, Response, and Remediation of Oil Spills

The proposed activities will be covered under an approved Regional Oil Spill Response Plan. The plan is in place, practiced, and updated as necessary. The best practical techniques shall be utilized to prevent the release of pollutants or toxic substances into the environment. All involved vessels and facilities are designed to be capable of prompt response and adequate removal of accidental discharges of oil. In addition, the proposed activities are 260 miles from shore; therefore no damages to natural resources are expected as the result of an unauthorized discharge of oil into coastal waters.

(Category 6)

Discharge of Municipal and Industrial Waste Water to Coastal Waters

No discharges from the proposed activities will occur in coastal waters. The proposed activities are 260 miles from shore; therefore there will be no effect on coastal waters.

(Category 8)

Development in Critical Areas

None of the proposed activities will occur in a critical area; therefore no effects to Texas' coastal zone are expected. The activity will not jeopardize the continued existence of species listed as endangered or threatened, and will not result in likelihood of the destruction or adverse modification of a habitat determined to be a critical habitat under the Endangered Species Act. The activity will not cause or contribute to violation of any applicable surface water quality standards. The activity will not violate any requirement imposed to protect a marine sanctuary.

(Category 9)

Construction of Waterfront Facilities and Other Structures on Submerged lands

No waterfront facilities or other structures are proposed on submerged lands in the Texas coastal zone, therefore the proposed activities are not expected to have any adverse impacts on submerged lands.

(Category 10)

Dredging and Dredged Material Disposal and Placement

No dredging or disposal/placement of dredged material is proposed; therefore no adverse effects to coastal waters, submerged lands, critical areas, coastal shore areas, or Gulf beaches are expected.

(Category 11)

Construction in the Beach / Dune System

The proposed activities do not include any construction projects in critical dune areas or areas adjacent to or on Gulf beaches, therefore, no impact to Texas' beach or dune systems are expected.

(Category 15)

Alteration of Coastal Historic Areas

The proposed activities do not include any alteration or disturbance of a coastal historic area; therefore, no impacts are expected to adversely affect any historical, architectural, or archaeological site in Texas' coastal zone.

(Category 16) Transportation

The proposed activities do not include any transportation construction projects within the coastal zone; therefore, no impacts to Texas' coastal zone are expected.

(Category 17) Emission of Air Pollutants

The proposed activities shall be carried out in conformance with applicable air quality laws, standards, and regulations. Emissions from the proposed activities are not expected to have significant impacts on onshore air quality because of the prevailing atmospheric conditions, emission heights, emission rates, and the distance of these emissions from the coastline. The proposed activities will occur approximately 260 miles from shore and will be within the exemption limits set by BOEM, therefore, no impacts to Texas' coastal zone is expected.

(Category 18) Appropriations of Water

The proposed activities do not include the impoundment or diversion of state water, therefore, no impacts to Texas' coastal zone is expected.

(Category 20) Marine Fishery Management

The proposed activities are located approximately 260 miles from shore and are not expected to have any effect on marine fishery management or fishery migratory patterns within waters in the coastal zone of Texas.

(Category 22) Administrative Policies

The necessary information for applicable agencies to make an informed decision on the proposed activities has been provided In conclusion, all activities shall be consistent with Texas' coastal management program and shall comply with all relevant rules and regulations. No activities are planned within any critical areas. Activities will be carried out avoiding unnecessary conflicts with other uses of the vicinity.

STATE OF TEXAS

CONSISTENCY CERTIFICATION FOR

INITIAL DEVELOPMENT OPERATIONS COORDINATION PLAN

KEATHLEY CANYON BLOCKS 875, 918, AND 919 OCS-G21444, 32654, and 21447

The proposed activities described in detail in this OCS Plan comply with Texas's approved Coastal Zone Management Program(s) and will be conducted in a manner consistent with such Program(s).

Anadarko Petroleum Corporation

Jill Fowler, Certifying Official

April, 2018

MISSISSIPPI COASTAL ZONE MANAGEMENT ACT INFORMATION

As authorized by the Federal Coastal Zone Management Act (CZMA), The State of Mississippi developed a Coastal Management Program (CMP) to allow for the review of proposed Federal license and permit activities affecting any coastal use or resources, in or outside of the Mississippi Coastal Zone.

The OCS related oil and gas exploratory and development activities having potential impact on the Mississippi Coastal Zone are based on the location of the proposed facilities, access to those sites, best practical techniques for drilling locations, drilling equipment guidelines for the prevention of adverse environmental effects, effective environmental protection, emergency plans and contingency plans.

Below are goals identified by the State of Mississippi and our comments and/or corresponding cross references:

<u>Goal 1</u>: To provide for reasonable industrial expansion in the coastal area and to ensure the efficient utilization of waterfront industrial sites so that suitable sites are conserved for water dependent industry.

The activities proposed in this plan are based out of Fourchon, Louisiana. The activities will not provide any industrial expansion on the coastal area of Mississippi. Therefore Mississippi coastal areas will be conserved for water dependent industry.

Goal 2: To favor the preservation of the coastal wetlands and ecosystems, except where a specific alteration of specific coastal wetlands would serve a higher public interest in compliance with the public purposes of the public trust in which the coastal wetlands are held.

Goal 2 is addressed in Section P, Environmental Impact Analysis. The nearest proposed activities will be 310 miles from the Mississippi coast.

Goal 3: To protect, propagate and conserve the state's seafood and aquatic life in connection with the revitalization of the seafood industry of the State of Mississippi.

Goal 3 is addressed in Section P, Environmental Impact Analysis. Little impact to the seafood industry can be expected due to the activities occurring 310 miles from the Mississippi coast.

Goal 4: To conserve the air and waters of the state, and to protect, maintain and improve the quality thereof for public use, for the propagation of wildlife, fish and aquatic life, and for domestic, agricultural, industrial, recreational and other legitimate beneficial uses.

Goal 4 is addressed in Section B, General Information, Section H, Air Emissions Information, and Section P, Environmental Impact Analysis.

Goal 5: To put to beneficial use to the fullest extent of which they are capable the water resources of the state, and to prevent the waste, unreasonable use, or unreasonable method of use of water.

The activities proposed in this plan are based in Fourchon, Louisiana. As such, Mississippi's water resources should not be impacted by the proposed activities. Activities occurring at the sites in the OCS will be conducted in accordance with our Regional Oil Spill Response Plan referenced in Section I of this plan.

Goal 6: To preserve the state's historical and archaeological resources, to prevent their destruction, and to enhance these resources wherever possible.

Goal 6 is addressed in Section F, Biological, Physical and Socioeconomic Information, and Section P, Environmental Impact Analysis.

Goal 7: To encourage the preservation of natural scenic qualities in the coastal area.

Goal 7 is addressed in Section G, Waste Discharges Information, Section I, Oil Spill Information, Section H, Air Emissions Information, and Section P, Environmental Impact Analysis.

Goal 8: To assist local governments in the provision of public facilities services in a manner consistent with the coastal program.

As the proposed activities are located 310 miles from the Mississippi coast and are based out of a shorebase in Fourchon, Louisiana, local governments should not be affected.

STATE OF MISSISSIPPI

CONSISTENCY CERTIFICATION FOR

INITIAL DEVELOPMENT OPERATIONS COORDINATION PLAN

KEATHLEY CANYON BLOCKS 875, 918, AND 919 OCS-G21444, 32654, and 21447

The proposed activities described in detail in this OCS Plan comply with Mississippi's approved Coastal Zone Management Program(s) and will be conducted in a manner consistent with such Program(s).

Anadarko Petroleum Corporation

Jill Fowler, Certifying Official

April, 2018

P ENVIRONMENTAL IMPACT ANALYSIS

Environmental Impact Analysis

For a

INITIAL DEVELEOPMENT OPERATIONS AND COORDINATION DOCUMENT Keathley Canyon Blocks 875, 918, and 919

(OCS-G 21444, OCS-G 32654, and OCS-G 21447)

Offshore Louisiana

March 2018

Prepared for:

Jill Fowler
Regulatory Analyst
Anadarko Petroleum Corporation
1201 Lake Robbins Drive
The Woodlands, Texas 77380
Telephone: (832) 636-1554

Prepared by:

CSA Ocean Sciences Inc. 8502 SW Kansas Avenue Stuart, Florida 34997 Telephone: (772) 219-3000



Environmental Impact Analysis For a DEVELEOPMENT OPERATIONS AND COORDINATION DOCUMENT

for Keathley Canyon Blocks 875, 918, and 919 (OCS-G 21444, OCS-G 32654, and OCS-G 21447)

DOCUMENT NO. CSA-ANADARKO-FL-18-3258-01-REP-01-FIN

VERSION	DATE	DESCRIPTION	PREPARED BY:	REVIEWED BY:	APPROVED BY:
01	3/14/18	Draft for review	J. Tiggelaar	A. Pittman	J. Tiggelaar
FIN	3/21/18	Final	J. Tiggelaar	n/a	J. Tiggelaar

The electronic PDF version of this document is the Controlled Master Copy at all times. A printed copy is considered to be uncontrolled and it is the holder's responsibility to ensure that they have the current version. Controlled copies are available upon request from the Document Production Department.

Contents

			Page						
Lis	t of	Tables	v						
Lis	t of	Figures	v						
		yms and Abbreviations							
		uction							
		mpact-Producing Factors							
Λ.	_	Installation Vessel Presence (Including Noise and Lights)							
		Physical Disturbance to the Seafloor							
		Air Pollutant Emissions							
		Effluent Discharges							
		Water Intake							
		Onshore Waste Disposal							
	A.7	Marine Debris	8						
	A.8	Support Vessel and Helicopter Traffic	9						
	A.9	Accidents	10						
		A.9.1 Small Diesel Fuel Spill	11						
		A.9.2 Large Oil Spill (Worst-Case Discharge)	12						
В.	Aff	ected Environment	18						
C.	lm	mpact Analysis							
	_	Physical/Chemical Environment							
		C.1.1 Air Quality							
		C.1.2 Water Quality	22						
	C.2	Seafloor Habitats and Biota	24						
		C.2.1 Soft Bottom Benthic Communities	24						
		C.2.2 High-Density Deepwater Benthic Communities	27						
		C.2.3 Designated Topographic Features	29						
		C.2.4 Pinnacle Trend Area Live Bottoms							
		C.2.5 Eastern Gulf Live Bottoms							
	C.3	Threatened, Endangered, and Protected Species and Critical Habitat							
		C.3.1 Sperm Whale (Endangered)							
		C.3.2 West Indian Manatee (Threatened)							
		C.3.3 Non-Endangered Marine Mammals (Protected)							
		C.3.4 Sea Turtles (Endangered/Threatened)							
		C.3.5 Piping Plover (Threatened)							
		C.3.6 Whooping Crane (Endangered)							
		C.3.7 Oceanic Whitetip Shark (Threatened)							
		C.3.8 Gulf Sturgeon (Threatened)							
		C.3.9 Beach Mice (Endangered)							
		C.3.10 Threatened Coral Species							

Contents (Continued)

			Pa	age				
	C.4	Coasta	al and Marine Birds	55				
		C.4.1	Marine Birds	55				
		C.4.2	Coastal Birds	57				
	C.5	Fisheri	ies Resources	60				
		C.5.1	Pelagic Communities and Ichthyoplankton	60				
		C.5.2	Essential Fish Habitat	62				
	C.6	Archae	eological Resources	65				
		C.6.1	Shipwreck Sites					
		C.6.2	Prehistoric Archaeological Sites					
	C.7	Coasta	ll Habitats and Protected Areas	67				
	C.8	Socioe	conomic and Other Resources	70				
		C.8.1	Recreational and Commercial Fishing	70				
		C.8.2	Public Health and Safety	71				
		C.8.3	Employment and Infrastructure	72				
		C.8.4	Recreation and Tourism	73				
		C.8.5	Land Use					
		C.8.6	Other Marine Uses					
	C.9	Cumul	ative Impacts	75				
D.	Environmental Hazards76							
	D.1 Geologic Hazards							
	D.2 Severe Weather							
	D.3	Currer	nts and Waves	76				
Ε.	. Alternatives							
_								
۲.	Wiit	igatio	n Measures	//				
G.	Consultation							
н.	Pre	parers	· · · · · · · · · · · · · · · · · · ·	77				
I.	Ref	erence	es	78				

List of Tables

Гable	Page
1	Bureau of Ocean Energy Management (BOEM) and Bureau of Safety and Environmental Enforcement (BSEE) Notices to Lessees and Operators (NTLs) applicable to this Environmental Impact Analysis (EIA)
2	Matrix of impact-producing factors and environmental resources (Modified from: Form BOEM-0142)6
3	Conditional probabilities of a spill in the lease area contacting shoreline segments. From: Ji et al. (2004)14
4	Shoreline segments with a 1% or greater conditional probability of contact from a spill starting at Launch Point 3 based on the 60-day Oil Spill Risk Analysis15
5	Baseline benthic community data from stations near the lease area and in similar water depths sampled during the Northern Gulf of Mexico Continental Slope Habitats and Benthic Ecology Study25
6	Federally listed endangered and threatened species that could potentially occur in the lease area and along the northern Gulf Coast31
7	Wildlife refuges, wilderness areas, and state and national parks and preserves within the geographic range of 1% or greater conditional probability of shoreline contacts within 30 days based on the 30-day Oil Spill Risk Analysis model
	List of Figures
igure	Page
1	Location of Keathley Canyon Blocks 875, 918, and 919 in the Gulf of Mexico2
2	Bathymetric profile of the lease area showing the surface hole locations of the wellsites where the proposed activities will occur in Keathley Canyon Blocks 875, 918, and 919
3	Location of loggerhead turtle designated critical habitat in relation to the lease area44
4	Location of selected environmental features in relation to the lease area50

Acronyms and Abbreviations

ac	acre	MARPOL	International Convention for the
ADIOS2	Automated Data Inquiry for Oil Spills 2		Prevention of Pollution from Ships
Anadarko	Anadarko Petroleum Corporation	MMC	Marine Mammal Commission
bbl	barrel	MMPA	Marine Mammal Protection Act
BOEM	Bureau of Ocean Energy	MMS	Minerals Management Service
	Management	MSRC	Marine Spill Response Corporation
BOEMRE	Bureau of Ocean Energy	MWCC	Marine Well Containment Company
	Management, Regulation and	NAAQS	National Ambient Air Quality
	Enforcement		Standards
BSEE	Bureau of Safety and Environmental	NMFS	National Marine Fisheries Service
	Enforcement	NOAA	National Oceanic and Atmospheric
CFR	Code of Federal Regulations		Administration
CO	carbon monoxide	NO_x	nitrogen oxides
CGA	Clean Gulf Associates	NPDES	National Pollutant Discharge
DP	dynamically positioned		Elimination System
DPS	distinct population segment	NTL	Notice to Lessees and Operators
EFH	Essential Fish Habitat	NWR	National Wildlife Refuge
EIA	Environmental Impact Analysis	OCS	Outer Continental Shelf
EIS	Environmental Impact Statement	OSRA	Oil Spill Risk Analysis
ESA	Endangered Species Act	OSRP	Oil Spill Response Plan
FAD	fish aggregating device	PAH	polycyclic aromatic hydrocarbon
GMFMC	Gulf of Mexico Fishery Management	PM	particulate matter
	Council	SO_x	sulfur oxides
H_2S	hydrogen sulfide	UME	Unusual Mortality Event
HAPC	Habitat Area of Particular Concern	USCG	U.S. Coast Guard
ha	hectare	USEPA	U.S. Environmental Protection
HOSS	high-volume open sea skimmer		Agency
IPF	impact-producing factor	USFWS	U.S. Fish and Wildlife Service
KC	Keathley Canyon	VOC	volatile organic compound
LARS	launch and recovery system	WCD	worst-case discharge

Introduction

Anadarko Petroleum Corporation (Anadarko) is submitting an Initial Development Operations and Coordination Document (DOCD) for Keathley Canyon Blocks 875 (KC 875), 918 (KC 918), and 919 (KC 919). Under this DOCD, Anadarko proposes to install subsea infrastructure including a new umbilical, pipeline, and five well jumpers, complete the KC 918 #001 ST02 well, and place KC 875 #005, KC 918 #001 ST02, KC 918 #003, KC 919 #008, and KC 919 #009 wells on production. The Environmental Impact Analysis (EIA) provides information on potential environmental impacts of Anadarko's proposed activities.

The lease area is approximately 213 miles (343 km) from the nearest shoreline (Louisiana), 232 miles (373 km) from the onshore support base at Port Fourchon, Louisiana, and 250 miles (402 km) from the helicopter base at Houma, Louisiana (**Figure 1**). The water depth at the location of the proposed activities ranges from approximately 6,828 to 7,393 ft (2,081 to 2,253 m). The proposed activities are expected to occur in 2018 (three wells) and 2019 (two wells).

The EIA for this DOCD was prepared for submittal to the Bureau of Ocean Energy Management (BOEM) in accordance with applicable regulations, including 30 Code of Federal Regulations (CFR) 550.242(s) and 550.261. The EIA is a project- and site-specific analysis of Anadarko's planned activities under this DOCD. The EIA complies with guidance provided in existing Notices to Lessees and Operators (NTLs) issued by BOEM and its predecessors, Minerals Management Service (MMS) and Bureau of Ocean Energy Management, Regulation and Enforcement (BOEMRE), including NTL 2008-G04 (extended by 2015-N02) and NTL 2015-N01. Potential impacts have been analyzed at a broader level in the 2017 to 2022 Programmatic Environmental Impact Statement (EIS) for the Outer Continental Shelf (OCS) Oil and Gas Leasing Program (BOEM, 2016a) and in lease sale EISs for the Western and Central Gulf of Mexico Planning Areas (BOEM, 2012a, b, 2013a, 2014a, 2015, 2016b, 2017a, b). The most recent lease sale EISs update environmental baseline information in light of the Macondo (*Deepwater Horizon*) incident and address potential impacts of a catastrophic spill (BOEM, 2012a, b, 2013a, 2014a, 2015, 2016b, 2017a, b). The analyses from those documents are incorporated here by reference.

All the proposed activities and facilities discussed in this DOCD are covered by Anadarko's Gulf of Mexico Regional Oil Spill Response Plan (OSRP) last approved on 14 August 2015 for Anadarko and its subsidiary, Anadarko US Offshore LLC (Company Numbers 00981 and 02219, respectively), in accordance with 30 CFR Part 254. The June 2017 biennial updates were acknowledged by the Bureau of Safety and Environmental Envorcement (BSEE) on July 12, 2017; 5 October 2017 updates were acknowledged by BSEE on 2 November 2017. Per BSEE, the OSRP is in compliance with 30 CFR 254.30. The OSRP details Anadarko's plan to rapidly and effectively manage oil spills that may result from drilling and production operations. Anadarko has designed its spill response program based on a regional capability of response to spills ranging from small operational spills to a worst-case discharge (WCD) from a well blowout. Anadarko's spill response program meets the response planning requirements of the relevant coastal states and applicable federal oil spill planning regulations. The OSRP also includes information regarding Anadarko's regional oil spill organization and dedicated response assets, potential spill risks, and local environmental sensitivities. It describes personnel and equipment mobilization. incident management team organization, and an overview of actions to be taken and notifications necessary in the event of a spill.

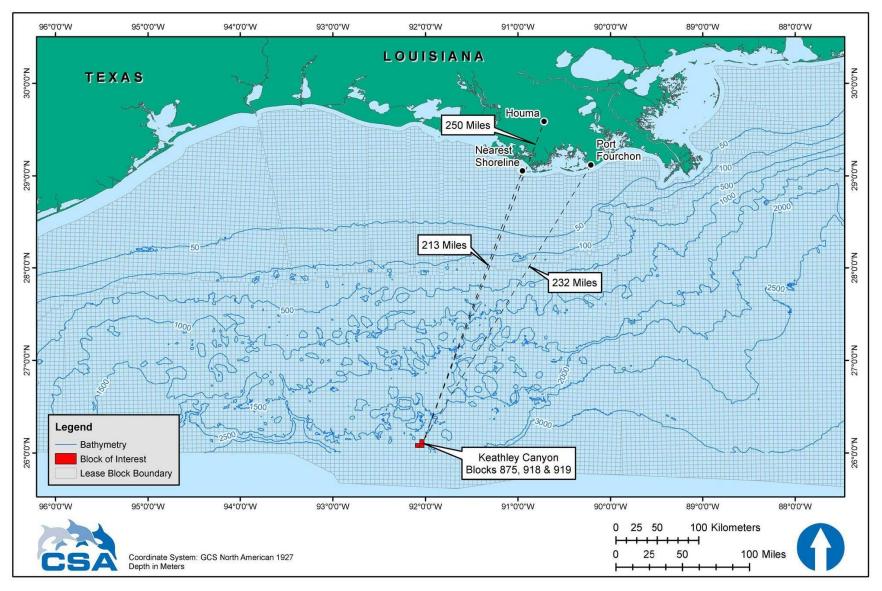


Figure 1. Location of Keathley Canyon Blocks 875, 918, and 919 in the Gulf of Mexico.

The EIA is organized into **Sections A** through **I**, corresponding to the information required by NTLs 2008-G04 (extended by NTL 2015-N02) and 2015-N01. The main impact-related discussions are in **Section A** (Impact-Producing Factors) and **Section C** (Impact Analysis). **Table 1** lists and summarizes the NTLs applicable to the EIA.

Table 1. Bureau of Ocean Energy Management (BOEM) and Bureau of Safety and Environmental Enforcement (BSEE) Notices to Lessees and Operators (NTLs) applicable to this Environmental Impact Analysis (EIA).

NTL	Title	Summary					
BOEM-2016-G01	Vessel Strike Avoidance and Injured/Dead Protected Species Reporting	Recommends protected species identification training recommends that vessel operators and crews maintain a vigilant watch for marine mammals and slow down or stop their vessel movement to avoid striking protected species; and requires operators to report sightings of any injured or dead protected species.					
BSEE-2015-G03	Marine Trash and Debris Awareness and Elimination	Instructs operators to exercise caution in the handling and disposal of small items and packaging materials; requires the posting of instructional placards at prominent locations on offshore vessels and structures; and mandates a yearly marine trash and debris awareness training and certification process.					
BOEM 2015-N02	Elimination of Expiration Dates on Certain Notices to Lessees and Operators Pending Review and Reissuance	Eliminates expiration dates (past or upcoming) of all NTLs currently posted on the BOEM website.					
BOEM 2015-N01	Information Requirements for Exploration Plans, Development and Production Plans, and Development Operations Coordination Documents on the OCS for Worst-Case Discharge (WCD) and Blowout Scenarios	Provides guidance regarding information required in WCD descriptions and blowout scenarios.					
BOEM 2014-G04	Military Warning and Water Test Areas	Provides contact links to individual command headquarters for the military warning and water test areas in the Gulf of Mexico.					
BSEE-2012-N06	Guidance to Owners and Operators of Offshore Facilities Seaward of the Coast Line Concerning Regional Oil Spill Response Plans (OSRP)	Provides clarification, guidance, and information for preparation of regional OSRP; and recommends description of response strategy for WCD scenarios to ensure capability to respond to oil spills is both efficient and effective.					
2011-JOINT-G01	Revisions to the List of Outer Continental Shelf (OCS) Blocks Requiring Archaeological Resource Surveys and Reports	Provides new information of which OCS blocks require archaeological surveys and reports; and identifies required survey line spacing in each block. This NTL augments NTL 2005-G07.					

Table 1. (Continued).

NTL Title		Summary					
2010-N10	Statement of Compliance with Applicable Regulations and Evaluation of Information Demonstrating Adequate Spill Response and Well Containment Resources	Informs operators using subsea or surface blowout preventers (BOPs) on floating facilities that applications for well permits must include a statement signed by an authorized company official stating that the operator will conduct all activities in compliance with all applicable regulations, including the increased safety measures regulations (75 FR 63346). Informs operators that BOEM will be evaluating whether each operator has submitted adequate information demonstrating that it has access to and can deploy containment resources promptly to respond to a blowout or other loss of well control.					
2009-G40	Deepwater Benthic Communities	Provides guidance for avoiding and protecting high-density deepwater benthic communities (including chemosynthetic and deepwater coral communities) from damage caused by OCS oil and gas activities in water depths greater than 984 ft (300 m). Prescribes separation distances of 2,000 ft (610 m) from each mud and cuttings discharge location and 250 ft (76 m) from all other seafloor disturbances.					
2009-G39	Biologically Sensitive Underwater Features and Areas	Provides guidance for avoiding and protecting biologically sensitive features and areas (i.e., topographic features, pinnacles, low relief live bottom areas, other potentially sensitive biological features) when conducting OCS operations in water depths less than 984 ft (300 m) in the Gulf of Mexico.					
2008-G04	Information Requirements for Exploration Plans and Development Operations Coordination Documents	Provides guidance on information requirements for OCS plans, including EIA requirements and information regarding compliance with the provisions of the Endangered Species Act and Marine Mammal Protection Act.					
2005-G07	Archaeological Resource Surveys and Reports	Provides guidance on regulations regarding archaeological discoveries, specifies requirements for archaeological resource surveys and reports, and outlines options for protecting archaeological resources.					

A. Impact-Producing Factors

Based on the description of Anadarko's proposed activities, a series of impact-producing factors (IPFs) have been identified. **Table 2** identifies the environmental resources that may be affected in the left column, and identifies sources of impacts associated with the proposed project across the top. **Table 2**, adapted from Form BOEM-0142, has been developed *a priori* to focus the impact analysis on those environmental resources that may be impacted as a result of one or more IPFs. The tabular matrix indicates which of the routine activities and accidental events could affect specific resources. An "X" indicates that an IPF could reasonably be expected to

affect a certain resource, and a dash (--) indicates no impact or negligible impact. Where there may be an effect, an analysis is provided in **Section C**. Potential IPFs for the proposed activities are listed below and briefly discussed in the following sections.

- Installation vessel presence (including noise and lights)
- Physical disturbance to the seafloor
- Air pollutant emissions
- Effluent discharges

- Water intake
- Onshore waste disposal
- Marine debris
- Support vessel and helicopter traffic
- Accidents

A.1 Installation Vessel Presence (Including Noise and Lights)

The activities proposed in this DOCD will be completed using an ROV boat/dynamically positioned (DP) construction vessel, a reeled pipe-lay vessel, and an umbilical lay vessel. A DP drillship will be used for well completions, but no drilling will occur. The proposed activities are expected to occur in 2018 and 2019. All vessels will maintain exterior lighting in accordance with applicable federal navigation and aviation safety regulations (International Regulations for Preventing Collisions at Sea, 1972 [72 COLREGS], Part C).

Vessel operations and equipment can be expected to produce noise associated with propulsion machinery that transmits directly to the water during station-keeping, wellhead installation, and maintenance operations. Additional sound and vibration will be transmitted through the hull to the water from auxiliary machinery, such as generators, pumps, and compressors (Richardson et al., 1995). The noise levels produced by DP vessels for station-keeping are largely dependent on the level of thruster activity required to keep position and, therefore, vary based on local ocean currents, sea and weather conditions, and operational requirements. Representative source levels for vessels in DP mode range from 184 to 190 dB re 1 μ Pa, with a primary amplitude frequency below 600 Hz (Blackwell and Greene Jr., 2003, Kyhn et al., 2011, McKenna et al., 2012). Sound pressure levels associated with offshore operations have a broadband (10 Hz to 10 kHz) energy of up to 190 dB re 1 μ Pa m (Hildebrand, 2005).

A.2 Physical Disturbance to the Seafloor

There will be minimal disturbance to the seafloor and soft bottom communities during installation of subsea infrastructure including the flowline and umbilical. Physical disturbance of the seafloor will be limited to the proximal area immediately adjacent to the infrastructure installation.

Table 2. Matrix of impact-producing factors and environmental resources (Modified from: Form BOEM-0142).

	Impact-Producing Factors									
	Installation	Installation Physical				Onshere Support			Accidents	
Environmental Resources	Vessel Presence (including noise and lights)	Disturbance to Seafloor	Air Pollutant Emissions	Effluent Discharges	Water Intake	Waste Disposal	Marine Debris	Vessel/Helicopter Traffic	Small Diesel Fuel Spill	Large Oil Spill
Physical/Chemical Environment						30			*	
Air quality	===		X(9)	(See)	1221	(22)	222	22	X(6)	X(6)
Water quality			(***)	Х		(TEST			X(6)	X(6)
Seafloor Habitats and Biota							Letter .			
Soft bottom benthic communities		Х			(**)					X(6)
High-density deepwater benthic communities		(4)	1	(4)				-		X(6)
Designated topographic features		(1)	1 414 11	(1)	(##)	(1 111)	(S ==)		22	
Pinnacle trend area live bottoms		(2)		(2)		()	1			==
Eastern Gulf live bottoms		(3)	3220	(3)	10220	1922	222	20		100
Threatened, Endangered, and Protected Specie	s, and Critical Habita	it	***			**************************************		•	₹	
Sperm whale (endangered)	X(8)	22	7 22 54	324W	1240	24 <u>6</u> 0 <u>0</u> 0	1922	X(8)	X(6,8)	X(6,8)
West Indian manatee (endangered)					::			X(8)		X(6,8)
Non-endangered marine mammals (protected)	Х	2000 2000	1881	(430)	144	1981		X	X(6)	X(6)
Sea turtles (endangered/threatened)	X(8)		1==1		0 == 0	3==1	(S24)	X(8)	X(6,8)	X(6,8)
Piping Plover (threatened)	==	5.71		1554	17.5	\$ \$	1000	350	==	X(6)
Whooping Crane (endangered)	===	==	N240	(Sept)	3223	(22)	3922	22)	2020	X(6)
Oceanic whitetip shark (threatened)	Х		-	L ate li) () (300	550	===	X(6)
Gulf sturgeon (threatened)	22	22	0295	12 6 77	0 <u>24</u> 0	14 <u>22</u> 1	19220	22	22.25	X(6)
Beach mouse (endangered)			:==:			2882	10-41			X(6)
Threatened coral species										X(6)
Coastal and Marine Birds	50	3	.,			#D		1		1 3.0
Marine birds	Х	571		1554	5 7.5 8)		Х	X(6)	X(6)
Shorebirds and coastal nesting birds	==	==	1421	(EE)	(22)	9 22 1	(San)	Х	==	X(6)
Fisheries Resources	₩.		l							50 100 100 100 100 100 100 100 100 100 1
Pelagic communities and ichthyoplankton	Х		322	Х	Х	(24)	200	2-7	X(6)	X(6)
Essential Fish Habitat	Х		; == :	Х	х	i n am i	10 -10 1		X(6)	X(6)
Archaeological Resources	Fr #793								L	I
Shipwreck sites		(7)	·	(44)	11					X(6)
Prehistoric archaeological sites	-	(7)	1=1	22				224		X(6)
Coastal Habitats and Protected Areas	16	* ***					e de la companya della companya dell			
Barrier beaches and dunes			Name of the second	1560	15 1,3 2	14 -1 4		X	200 975	X(6)
Wetlands and seagrass beds	**	22	1241			(<u>***</u> (х	22	X(6)
Coastal wildlife refuges and wilderness areas				1551	9 7.5 0	(355)	1	х		X(6)
Socioeconomic and Other Resources	Lv.	•	Mr. and							
Recreational and commercial fishing	Х		(44)			2000			X(6)	X(6)
Public health and safety			j				-			X(5,6)
Employment and infrastructure	=	==		(##)				==	**	X(6)
Recreation and tourism	===	571	U 0754	1 55 7.		14772				X(6)
Land use			12401	(Sept.)	1222	1922		227		X(6)
Other marine uses				1						X(6)

X indicates potential impact; dash (--) indicates no impact or negligible impact; numbers refer to table footnotes.

Table 2 Footnotes and Applicability to this Program:

Footnotes are numbered to correspond to entries in **Table 2**; applicability to this case is noted by a bullet point following the footnote.

- (1) Activities that may affect a marine sanctuary or topographic feature. Specifically, if the well, rig site, or any anchors will be on the seafloor within the following:
 - (a) 4-mile zone of the Flower Garden Banks or the 3-mile zone of Stetson Bank;
 - (b) 1,000 m, 1-mile, or 3-mile zone of any topographic feature (submarine bank) protected by the Topographic Features Stipulation attached to an Outer Continental Shelf (OCS) lease;
 - (c) Essential Fish Habitat (EFH) criteria of 500 ft from any no-activity zone; or
 - (d) Proximity of any submarine bank (500-ft buffer zone) with relief greater than 2 m that is not protected by the Topographic Features Stipulation attached to an OCS lease.
 - None of these conditions (a through d) are applicable. The lease is not within or near any marine sanctuary, topographic feature, submarine bank, or no-activity zone.
- (2) Activities with any bottom disturbance within an OCS lease block protected through the Live Bottom (Pinnacle Trend) Stipulation attached to an OCS lease.
 - The Live Bottom (Pinnacle Trend) Stipulation is not applicable to the lease area.
- (3) Activities within any Eastern Gulf OCS block where seafloor habitats are protected by the Live Bottom (Low-Relief) Stipulation attached to an OCS lease.
 - The Live Bottom (Low-Relief) Stipulation is not applicable to the lease area.
- (4) Activities on blocks designated by the Bureau of Ocean Energy Management (BOEM) as being in water depths 1,312 ft (400 m) or greater.
 - No impacts to high-density deepwater benthic communities are anticipated. No high or low positive seafloor amplitude anomalies representing potential benthic communities were noted within 2,000 ft (610 m) of the location of the proposed activities (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017).
- (5) Exploration or production activities where hydrogen sulfide (H_2S) concentrations greater than 500 parts per million (ppm) might be encountered.
 - Mississippi Canyon Blocks 128 and 129 were classified as H₂S absent under a previously approval Initial Exploration Plan.
- (6) All activities that could result in an accidental spill of produced liquid hydrocarbons or diesel fuel that would potentially impact these environmental resources. If the proposed action is located a sufficient distance from a resource that no impact would occur, the EIA can note that in a sentence or two.
 - Accidental hydrocarbon spills could affect the resources marked (X) in the matrix, and potential impacts are analyzed in **Section C**.
- (7) All activities that involve seafloor disturbances, including anchor emplacements, in any OCS block designated by the BOEM as having high probability for the occurrence of shipwrecks or prehistoric sites, including such blocks that will be affected that are adjacent to the lease block in which your planned activity will occur. If the proposed activities are located a sufficient distance from a shipwreck or prehistoric site that no impact would occur, the EIA can note that in a sentence or two.
 - No impacts on archaeological resources are expected. Although the lease area is on BOEM's list of archaeology survey blocks (BOEM, 2011), the locations of the proposed activities are well beyond the 197 ft (60 m) depth contour used by BOEM as the seaward extent for prehistoric archaeological site potential in the Gulf of Mexico. DP installation vessels will be used; therefore, seafloor disturbances due to anchoring will not occur. No unidentified side-scan sonar targets were noted within 2,000 ft (610 m) of the location of the proposed activities (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017).
- (8) All activities that you determine might have an adverse effect on endangered or threatened marine mammals or sea turtles or their critical habitats.
 - Impact-producing factors that may affect marine mammals, sea turtles, or their critical habitats include
 installation vessel presence, support vessel and helicopter traffic, and accidents. See Section C.
- (9) Production activities that involve transportation of produced fluids to shore using shuttle tankers or barges.
 - Not applicable.

A.3 Air Pollutant Emissions

Offshore air pollutant emissions will result from installation vessel operations as well as support vessel (both supply and crew vessels) and helicopter transits. These emissions occur mainly from combustion of diesel and aviation fuel (Jet-A). The combustion of fuels occurs in diesel-powered generators, pumps, or motors and from lighter fuel motors. Primary air pollutants typically associated with emissions from internal combustion engines are suspended particulate matter (PM), sulfur oxides (SO_x), nitrogen oxides (NO_x), volatile organic compounds (VOCs), and carbon monoxide (CO).

The Air Quality Emissions Report (see DOCD Section H) prepared in accordance with BOEM requirements demonstrates that the projected emissions are below exemption levels set by the applicable regulations in 30 CFR 550.303. Based on this and the distance from shore, it can be concluded that the emissions will not significantly affect the air quality of the onshore area for any of the criteria pollutants. No further analysis or control measures are required.

A.4 Effluent Discharges

Effluent discharges are summarized in DOCD Section G. The discharges will include treated sanitary and domestic wastes, deck drainage, desalination unit brine, wash water, blowout preventer fluid, non-pollutant completion fluids, produced water, uncontaminated ballast and bilge water, non-contact cooling water, and fire water. All offshore discharges will be in accordance with requirements of the National Pollutant Discharge Elimination System (NPDES) General Permit No. GMG290006 issued by the U.S. Environmental Protection Agency (USEPA), including permit compliance terms, discharge volumes, discharge rates, and associated monitoring requirements.

A.5 Water Intake

Seawater will be drawn from the ocean for once-through, non-contact cooling of machinery on the installation vessels. Section 316(b) of the Clean Water Act requires NPDES permits to ensure that the location, design, construction, and capacity of cooling water intake structures reflect the best technology available to minimize adverse environmental impact from impingement and entrainment of aquatic organisms. The installation vessels used in this project will be in compliance with all cooling water intake structure requirements.

A.6 Onshore Waste Disposal

Wastes generated during the proposed activities are tabulated in DOCD Section G. A total of approximately 60,000 lbs (27,216 kg) of trash and debris will be generated over the life of the project. Trash will be transported to shore in disposal bags for final disposal by municipal operators in accordance with applicable regulations. Other wastes transported to shore for re-use, recycling, or disposal include chemical product waste (well treatment fluids), completion fluids, workover fluids, used oil, and produced sand. All wastes will be transported to shore in containers approved by the U.S. Department of Transportation for re-use, recycling, or disposal in accordance with applicable regulations.

A.7 Marine Debris

Anadarko will comply with all regulations relating to solid waste handling, transporation and disposal, including the International Convention for the Prevention of Pollution from Ships

(MARPOL 73/78) Annex V requirements as well as USEPA, U.S. Coast Guard (USCG), and BOEM regulations. These regulations include prohibitions and compliance requirements regarding the deliberate discharging of containers and other similar materials (i.e., trash and debris) into the marine environment as well as the protective measures to be implemented to prevent the accidental loss of solid materials into the marine environment. For example, the BSEE regulations 30 CFR 250.300(a) and (b)(6) prohibit operators from deliberately discharging containers and other similar materials (i.e., trash and debris) into the marine environment, and 30 CFR 250.300(c) requires durable identification markings on equipment, tools, containers (especially drums), and other materials. The USEPA and USCG regulations require operators to be proactive in avoiding accidental loss of solid materials by developing waste management plans, posting informational placards, manifesting trash sent to shore, and using special precautions such as covering outside trash bins to prevent accidental loss of solid waste. In addition to the regulations in 30 CFR 250, BSEE issued NTL BSEE-2015-G03, which instructs operators to exercise caution in the handling and disposal of small items and packaging materials, requires the posting of placards at prominent locations on offshore vessels and structures, and mandates a yearly training and certification process for marine trash and debris awareness.

A.8 Support Vessel and Helicopter Traffic

The project will be supported by two supply vessels, one crew vessel, and one work boat in addition to the ROV boat/DP construction vessel, reeled pipe-lay vessel, and an umbilical lay vessel. All vessels will be based out of Port Fourchon, Louisiana. The supply vessels are expected to be in the project location for a total of 10 days each. The crew vessel will make an estimated three round trips per week during completion operations, and the work boat will make an estimated two round trips per week during completion operations.

The vessels typically will transit to and from the project area via the most direct route from the shorebase. Anadarko will use existing shorebase facilities at Port Fourchon, Louisiana for the onshore support of crew and supply vessel activities. No port terminal expansion or construction is planned.

Offshore support vessels associated with the proposed project will contribute to the overall acoustic environment by transmitting noise through both air and water. The support vessels will use conventional diesel-powered screw propulsion. Vessel noise is a combination of narrow-band (tonal) and broadband sound (Richardson et al., 1995, Hildebrand, 2009, McKenna et al., 2012). Tones typically dominate up to approximately 50 Hz, whereas broadband sounds may extend to 100 kHz. The primary sources of vessel noise are propeller cavitation, propeller singing, and propulsion; other sources include auxiliary engine noise, flow noise from water dragging along the hull, and bubbles breaking in the vessel's wake (Richardson et al., 1995). The intensity of noise from support vessels is roughly related to ship size, weight, and speed. Broadband source levels for smaller boats (a category that includes supply and other service vessels) are in the range of 150 to 180 dB re 1 μ Pa m (Richardson et al., 1995, Hildebrand, 2009, McKenna et al., 2012).

The project will be supported by one helicopter that will make an estimated 10 round trips per week between the project area and the heliport in Houma, Louisiana. The helicopter will be used to transport personnel as well as small supplies and will take the most direct route of travel between the heliport and the lease area when air traffic and weather conditions permit.

Helicopters typically maintain a minimum altitude of 700 ft (213 m) while in transit offshore, 1,000 ft (305 m) over unpopulated areas or across coastlines, and 2,000 ft (610 m) over populated areas and sensitive habitats such as wildlife refuges and park properties (BOEM, 2012a). Additional guidelines and regulations specify that helicopters maintain an altitude of 1,000 ft (305 m) within 300 ft (91 m) of marine mammals (BOEM, 2017a). Anadarko will use existing air transportation (helicopter) facilities in Houma, Louisiana. No terminal expansion or construction is planned.

Dominant tones in noise spectra from helicopters are below 500 Hz with a source level of approximately 149 to 151 dB re 1 Pa m (for a Bell 212 helicopter) (Richardson et al., 1995). Levels of noise received underwater from passing aircraft depend on the aircraft's altitude, the aspect (direction and angle) of the aircraft relative to the receiver, receiver depth, water depth, and seafloor type (Richardson et al., 1995). Received level diminishes with increasing receiver depth when an aircraft is directly overhead, but may be stronger at mid-water than at shallow depths when an aircraft is not directly overhead (Richardson et al., 1995). Because of the relatively high expected airspeeds during transits and these physical variables, aircraft-related noise (including both airborne and underwater noise) is expected to be very brief in duration.

A.9 Accidents

The EIA focuses on two potential accidents:

- a small diesel fuel spill, which is the most likely type of spill during OCS activities (discussed in Section A.9.1); and
- a large oil spill, up to and including the WCD for this DOCD (as detailed in DOCD Section I).

The following subsections summarize details regarding the sizes and fates of these spill scenarios. Impacts are analyzed in **Section C**.

Recent EISs (BOEM, 2014b, 2015, 2016b, 2017a, b) analyzed other types of accidents relevant to offshore operations that could lead to potential impacts to the marine environment: loss of well control, vessel collision, and chemical spills. These types of accidents, along with a hydrogen sulfide (H_2S) release, are discussed briefly below.

Loss of Well Control. A loss of well control is the uncontrolled flow of a reservoir fluid that may result in the release of gas, condensate, oil, drilling fluids, sand, or water. Loss of well control is a broad term that includes very minor up to the most serious well control incidents, while blowouts are considered to be a subset of more serious incidents with greater risk of oil spill or human injury (BOEM, 2016a, 2017a). Loss of well control may result in the release of drilling fluid or loss of oil. Not all loss of well control events result in blowouts (BOEM, 2017c). In addition to the potential release of gas, condensate, oil, sand, or water, the loss of well control can also resuspend and disperse bottom sediments (BOEM, 2012a, 2017a, b). BOEM (2016a) noted that most OCS blowouts have resulted in the release of gas.

Anadarko has a robust system in place to prevent loss of well control. Measures to prevent a blowout, reduce the likelihood of a blowout, and conduct effective and early intervention in the event of a blowout are described in the NTL 2015-N01 package submitted with this DOCD, as required by BOEM. The potential for a loss of well control event will be minimized by adhering to the requirements of applicable regulations such as the Well Control Rule (75 *FR* 63365) and NTL 2010-N10, which specify additional safety measures for OCS activities.

<u>Vessel Collisions</u>. BSEE data show that there were 119 OCS-related collisions between 2009 and 2016 (BSEE, 2016). Most collision mishaps are the result of support vessels colliding with platforms or vessel collisions with pipeline risers. Approximately 10% of vessel collisions with platforms in the OCS resulted in diesel spills, and in several collision incidents, fires resulted from hydrocarbon releases. To date, the largest diesel spill associated with a collision occurred in 1979 when an anchor-handling vessel collided with a drilling platform in the Main Pass lease area, spilling 1,500 bbl of diesel fuel. Diesel fuel is the product most frequently spilled, but oil, natural gas, corrosion inhibitor, hydraulic fluid, and lube oil also have been released as a result of vessel collisions. Human error accounted for approximately half of all reported vessel collisions from 2006 to 2010. As summarized by BOEM (2017c), vessel collisions occasionally occur during routine operations. Some of these collisions have caused spills of diesel fuel or chemicals. Anadarko will comply with all USCG- and BOEM-mandated safety requirements to minimize the potential for vessel collisions.

<u>Chemical Spills</u>. Chemicals are stored and used for pipeline hydrostatic testing and during drilling and in well completion operations. The relative quantities of their use is reflected in the largest volumes spilled (BOEM, 2017c). Completion, workover, and treatment fluids are the largest quantity used and comprise the largest releases. Between 2007 and 2014, an average of two chemical spills <50 bbl in volume and three checmical spills >50 bbl in volume occurred each year (BOEM, 2017a).

 $\underline{\text{H}_2\text{S}}$ Release. KC 875, 918, and 919 were classified as H_2S absent under a previously approved Initial Exploration Plan.

A.9.1 Small Diesel Fuel Spill

<u>Spill Size</u>. According to the analysis by BOEM (2017a), the most likely type of small spill (<1,000 bbl) resulting from OCS activities is a failure related to the storage of oil or diesel fuel. Historically, most diesel spills have been ≤1 bbl, and this is predicted to be the most common spill volume in ongoing and future OCS activities in the Western and Central Gulf of Mexico Planning Areas (Anderson et al., 2012). As the spill volume increases, the incident rate declines dramatically (BOEM, 2017a). The median size for spills ≤1 bbl is 0.024 bbl, and the median volume for spills of 1 to 10 bbl is 3 bbl (Anderson et al., 2012). For the EIA, a small diesel fuel spill of 3 bbl is used. Operational experience suggests that the most likely cause of such a spill would be a rupture of the fuel transfer hose resulting in a loss of contents (<3 bbl of fuel) (BOEM, 2012a).

<u>Spill Fate</u>. The fate of a small diesel fuel spill in the lease area would depend on meteorological and oceanographic conditions at the time of the spill as well as the effectiveness of spill response activities. However, given the open ocean location of the lease area and response actions required to be implemented by the responsible party, it is expected that impacts from a small spill would be minimal (BOEM, 2016a).

The water-soluble fractions of diesel are dominated by two- and three-ringed polycyclic aromatic hydrocarbons (PAHs), which are moderately volatile (National Research Council, 2003a). The constituents of these oils are light to intermediate in molecular weight and can be readily degraded by aerobic microbial oxidation. Due to its low density, diesel will not sink to the seafloor. Diesel dispersed in the water column can adhere to suspended sediments, but this generally occurs only in coastal areas with high suspended solids loads (National Research

Council, 2003a) and would not be expected to occur to any appreciable degree in offshore waters of the Gulf of Mexico. The National Oceanic and Atmospheric Administration (NOAA) has reported that diesel oil is readily and completely degraded by naturally occurring microbes (NOAA, 2006).

Oil slicks from diesel spills within the marine environment are expected to persist for relatively short periods of time, ranging from minutes (for a <1 bbl spill), to hours (for a 1 to 10 bbl spill), to a few days (for a 10 to 1,000 bbl spill), and will rapidly spread out, evaporate, and disperse into the water column (BOEM, 2012a).

For the purposes of the EIA, the fate of a small diesel fuel spill was estimated using NOAA's Automated Data Inquiry for Oil Spills 2 (ADIOS2) model (NOAA, 2016a). This model uses the physical properties of various oil types in its database to predict the rate of evaporation and dispersion over time as well as changes in the density, viscosity, and water content of the spilled product. Based on model results, it is estimated that more than 90% of a small diesel spill would evaporate or disperse within 24 hours. The area of sea surface exhibiting floating diesel fuel during this 24-hour period would range from 0.5 to 5 ha (1.2 to 12 ac), depending on sea state and weather conditions.

The ADIOS2 results, coupled with spill trajectory information for a large spill from Oil Spill Risk Analysis (OSRA) modeling, indicate that a small diesel fuel spill would not impact coastal or shoreline resources because of the distance of the lease area to the nearest shoreline (213 miles [343 km]). OSRA modeling results indicate that a spill in the lease area would have <0.5% conditional probability of reaching coastal Louisiana within 10 days of a spill. By that time, essentially 100% of a small diesel fuel spill is expected to have dispersed or evaporated through natural processes, without taking into account Anadarko's spill response measures. Because of the lack of persistence of small oil spills in the environment and the project's distance from shore, it is unlikely that a small spill within the project area would make landfall prior to dissipating (BOEM, 2012a, 2017a).

<u>Spill Response</u>. In the unlikely event that shipboard prevention procedures fail to circumvent a fuel spill, response equipment and trained personnel will be activated so that spill effects will be localized and will result only in short-term environmental consequences. DOCD Section I provides a detailed discussion of Anadarko's response to a spill.

A.9.2 Large Oil Spill (Worst-Case Discharge)

<u>Spill Size</u>. The WCD scenario for this project is defined as an uncontrollable oil discharge from the subsea wellbore resulting from a blowout incident. The scenario assumes that the wellhead fails mechanically and a blowout occurs at the seafloor, allowing the entire wellbore fluid to flow up the existing production string. The maximum total volume during a blowout could potentially be 2,660,000 bbl.

<u>Blowout Scenario</u>. In accordance with NTL 2015-N01 and as required by 30 CFR 550.213g, a scenario for a potential blowout of a well, and the highest volume of liquid hydrocarbons potentially released, has been detailed and is provided within this DOCD. An estimated 76 days will be required to mobilize equipment and drill a relief well under the blowout scenario. The maximum total volume of liquid hydrocarblons released during a blowout is potentially

2,660,000 bbl, assuming 76 days for the duration of a blowout, multiplied by the worst-case daily uncontrolled volume (35,000 bbl per day).

The detailed analysis of the WCD calculations can be found in DOCD Section I, as required by NTL 2015-N01 and 30 CFR 550.219(a)(2)(iv). Descriptions of the measures to be undertaken by Anadarko to prevent a blowout, reduce the likelihood of a blowout, and conduct effective and early intervention in the event of a blowout are included in the analysis. Anadarko will also comply with NTL 2010-N10 and the Well Control Rule (75 FR 63365) which specify additional safety measures for OCS activities.

Spill Probability. Holand (1997) estimated a probability of 0.0021 for a deep drilling blowout during exploration drilling based on U.S. Gulf of Mexico data. The International Association of Oil & Gas Producers (2010) conducted an analysis using the SINTEF¹ database and estimated a blowout frequency of 0.0017 per exploratory well for non-North Sea locations. BOEM updated OCS spill frequencies (barrels spilled per barrels produced) to include the Macondo incident. Spill rates for OCS platforms have decreased in recent years as the volume of oil handled has increased with no large spills since the Macondo spill. According to ABS Consulting Inc. (2016), the spill rate for spills >1,000 bbl dropped to 0.22 spills per billion barrels. According to BSEE's Well Control Rule (75 FR 63365), issued following the Macondo spill, the baseline risk of a catastrophic blowout is estimated to be once every 26 years.

<u>Spill Trajectory</u>. The fate of a large oil spill in the lease area would depend on meteorological and oceanographic conditions at the time of the spill. The OSRA model is a computer simulation of oil spill transport that uses realistic data for winds and currents to estimate spill trajectory. The OSRA report by Ji et al. (2004) provides conditional contact probabilities for shoreline segments along the Gulf of Mexico.

The results for the 30-day OSRA model for Launch Area 29 (where KC 875, 918, and 919 are located) are presented in **Table 3**. The model predicts <0.5% chance of contact within 3 or 10 days. Within 30 days, the model predicts 1% to 2% chance of shoreline contact. Matagorda and Galveston Counties in Texas and Cameron Parish, Louisiana have the highest probability of shoreline contact within 30 days (2% conditional probability) (**Table 3**). It should be noted that counties whose conditional probability for shoreline contact is <0.5% for 3, 10, and 30 days are not shown in **Table 3**.

EIA, Mississippi Canyon Blocks 128 and 129 CSA-Anadarko-FL-18-3258-01-REP-01-FIN

¹ Stiftelsen for Industriell og Teknisk Forskning (Foundation for Scientific and Industrial Research, Norwegian Institute of Technology).

Table 3. Conditional probabilities of a spill in the lease area contacting shoreline segments. From: Ji et al. (2004).

Shoreline Segment	Carreto an Banish and State	Conditional Probability of Contact ^a (%)						
	County or Parish and State	3 Days	10 Days	30 Days				
C03	Kenedy County, Texas	LEET)	V					
C04	Kleberg County, Texas	ENTS.	मिल	1				
C06	Aransas County, Texas			1				
C07	Calhoun County, Texas	L=T	==	1				
C08	Matagorda County, Texas	e st	स्थान	2				
C09	Brazoria County, Texas			1				
C10	Galveston County, Texas	LEET)		2				
C12	Jefferson County, Texas	e -	লবিল -	1				
C13	Cameron Parish, Louisiana			2				
C14	Vermilion Parish, Louisiana	:==		1				

^a Conditional probability refers to the probability of contact within the stated time period, assuming that a spill has occurred (-- indicates <0.5%).

The 30-day OSRA modeling results reported reported by Ji et al. (2004) did not evaluate the fate of a spill over time periods exceeding 30 days, nor did they estimate the fate of a release that continues over a period of weeks or months. As noted by Ji et al. (2004), the OSRA model does not consider the chemical composition or biological weathering of oil spills, the spreading and splitting of oil spills, or spill response activities. The model does not specify a particular spill size but has been used by BOEM to evaluate contact probabilities for spills of more than 1,000 bbl.

BOEM (2017c) presents additional OSRA modeling to simulate a spill that continues for 90 consecutive days, with each trajectory tracked for 60 days during four seasons. In this updated OSRA model, 60 days was chosen as a conservative estimate of the maximum duration that spilled oil would persist on the sea surface following a spill (BOEM, 2017c). The spatial resolution is limited, with seven launch points in the entire Western, Central, and Eastern Planning Areas of the Gulf of Mexico. These launch points were deliberately located in areas identified as having a high possibility of containing large oil reserves. The launch point most appropriate for modeling a spill in the lease area is Launch Point 3. The 60-day OSRA results for Launch Point 3 are presented in **Table 4**. It should be noted that counties whose conditional probability for shoreline contact is <0.5% for 3, 10, 30, or 60 days are not shown in **Table 4**.

Table 4. Shoreline segments with a 1% or greater conditional probability of contact from a spill starting at Launch Point 3 based on the 60-day Oil Spill Risk Analysis. Values are conditional probabilities that a hypothetical spill in the lease area could contact shoreline segments within 60 days.

Season	Spring			Summer			Fall			Winter						
Day	3	10	30	60	3	10	30	60	3	10	30	60	3	10	30	60
County or Parish	Conditional Probability of Contact ¹ (%)															
Cameron, Texas	1975	1999	1000	1000			1000	2		1000	1000	1	0.55	0.5550	0.5750	1
Willacy, Texas	1975	1999	1000	1975	(455)	1999	1000	1	(1000)	(1999)	155	1	(555)	0550	(1707)	2
Kenedy, Texas							1	5				2				3
Kleberg, Texas	-			146	146		1	3		146	1	2				2
Nueces, Texas								2			1	2				3
Aransas, Texas								2			1	2				3
Calhoun, Texas	-							3			1	2			1	4
Matagorda, Texas	-		3	5			1	4			2	5			3	10
Brazoria, Texas	-		3	3			2	5			1	2			3	8
Galveston, Texas	-		3	5			2	3			1	2			2	5
Jefferson, Texas	-	100	4	5	190	160	1	1	180	J#G	166			-	1	2
Cameron, Louisiana	-	146	9	11	166	-	1	3	144	160		2	-	-	1	3
Vermilion, Louisiana		1	5	6			1	1	144	-					1	2
Iberia, Louisiana	(202)	1	3	3	122	(222)	3222	122	122	222	122	122	(22)	(22)	(22)	1
St. Mary, Louisiana		3224	1	1	-22	122	1221	-22	-22	-	22	122	122	(22)	122	100
Terrebonne, Louisiana		5	12	13			1	2			1	1	-22	1	2	2
Lafourche, Louisiana	122	2	5	6	122	122	1	2	-22	122	18221	122	122	(22)	1	2
Jefferson, Louisiana	142	122	1	1	1442	122	122	1	22	200	1822	122	122	(22)	10021	122
Plaquemines, Louisiana		3	10	10			2	3				-22	-22	-22	2	2
St. Bernard, Louisiana			1	1	-22			1221			1221	1221	1221	122	122	1221
Baldwin, Alabama	122	92/20	1	1	122	1822	12.21	122	122	1822	122	122	122	122	-	(222)
Escambia, Florida	22	122	1	1	-22	-	-22	122	22		122	122	122	(22)	1221	122
Okaloosa, Florida				1							122					1221
Bay, Florida			1	1			1221				922					1441
Miami-Dade, Florida								1								
State Coastline	Conditional Probability of Contact ¹ (%)															
Texas			13	19			7	30			7	21			11	44
Louisiana		12	46	52		2	6	12		1	2	4		2	8	12
Mississippi	_	-	1	1			1000	1			-					
Alabama			1	1			1									
Florida			2	5				2				3	1441			1

Conditional probability refers to the probability of contact within the stated time period assuming that a spill has occurred (-- indicates <0.5%). Values are conditional probabilities that a hypothetical spill in the lease area could contact shoreline segments within 60 days. Modified from BOEM (2017c).</p>

From Launch Point 3, potential shoreline contacts within 60 days range from Cameron County, Texas (at the Texas-Mexico border), to Miami-Dade County in southeastern Florida. Based on statewide contact probabilities within 60 days, Texas and Louisiana have the highest likelihood of contact during all four seasons, with Louisiana having higher probabilities in spring (52%) and Texas having higher probabilities during summer, fall, and winter (ranging from 21% to 44% within 60 days). The model predicts a 1% probability of a spill contacting Mississippi shorelines during spring and summer, and a 1% probability of a spill contacting Alabama shorelines during spring. Florida shorelines are predicted to be contacted in any season with a probability up to 5% in spring. Based on the 60-day trajectories, counties or parishes with 10% or greater contact

probability during any season include Matagorda County, Texas; and Cameron, Terrebonne, and Plaquemines Parishes in Louisiana (**Table 4**).

<u>Weathering</u>. Following an oil spill, several physical, chemical, and biological processes, collectively called weathering, interact to change the physical and chemical properties of the oil, influencing potential effects to marine organisms and ecosystems. The most important weathering processes include spreading, evaporation, dissolution, dispersion into the water column, formation of water-in-oil emulsions, photo-oxidation, microbial degradation, adsorption to suspended particulate matter, stranding on shore, and deposition to the seafloor (National Research Council, 2003a).

Weathering decreases the concentration of oil and produces changes in its chemical composition, physical properties, and toxicity (Tarr et al., 2016). The more toxic, light aromatic and aliphatic hydrocarbons are lost rapidly by evaporation and dissolution from a slick on the water surface. For example, the light, paraffinic crude oil spilled during the *Deepwater Horizon* incident lost approximately 55 weight percent to evaporation during the first 3 to 5 days while floating on the sea surface (Daling et al., 2014). Several studies in the aftermath of the Macondo spill concluded that approximately 25% of mass below n- C_8 was lost during the oil's ascent to the surface, before an increased rate of weathering occurred once on the surface due to photo-oxidation (Lewan et al., 2014, Faksness et al., 2015, Stout and Payne, 2016, Stout et al., 2016).

Evaporated hydrocarbons are degraded rapidly by sunlight. Biodegradation of oil on the water surface and in the water column by marine bacteria is a dynamic process; microbes have been shown to first degrade the n-alkanes and then the light aromatics from the oil. Other petroleum components are biodegraded more slowly (Hazen et al., 2016). Photo-oxidation affects mainly the medium and high molecular weight PAHs in the oil on the water surface.

<u>Spill Response</u>. Anadarko's Regional OSRP was last approved on 14 August 2015. The June 2017 biennial updates were acknowledged by BSEE on 12 July 2017; updates submitted on 5 October 5 were acknowledged by BSEE on 2 November 2017. Per BSEE, the OSRP is in compliance with 30 CFR 254.30(a). The OSRP provides a detailed plan that enables Anadarko to respond rapidly and effectively manage response efforts for oil spills that may result from drilling and production operations. The OSRP contains detailed information on "Quick Response" procedures, including:

- responsibilities of all Anadarko and contract personnel to report any observed discharge from known or unknown sources;
- procedures to locate and determine the size of a discharge; and
- contact information for alerting the spill management team, complete with names, phone numbers, and locations.

In the event of a large oil spill up to and including a WCD, Anadarko has access to surface and subsea response/containment capabilities that could be implemented through various organizations under contract. Anadarko's primary spill response equipment provider is Clean Gulf Associates (CGA).

CGA has skimming vessels capable of operating in shallow waters, nearshore areas, and offshore areas. These vessels have oleophilic brush pack skimming systems operating in troughs built into the hulls; below-deck storage; and marine electronics packages including marine, aircraft, and

company-frequency radios, radar, moving map plotters, global positioning system, satellite phones, and depth finders. CGA also offers Fast Response Systems staged throughout the Gulf of Mexico available for offshore use.

The CGA high-volume open sea skimmer (HOSS) barge consists of a skimming system built into an oil recovery barge. There are 1,000-bbl recovered oil storage tanks built into the hull where oil can be separated and offloaded. Skimming operations are conducted from the control room overlooking the skimmer deck. The estimated daily recovery capacity for the HOSS barge is approximately 43,000 bbl of surface oil.

CGA has recently acquired Koseq skimming arms and Aqua Guard skimmers to enhance its readiness. In addition, an x-band radar/infrared tracking system has been installed on the HOSS barge. Additional CGA equipment can be referenced online at http://www.cleangulfassoc.com/equipment.

Anadarko also has a contract with the Marine Spill Response Corporation (MSRC) for additional spill response equipment. MSRC has a dedicated fleet for the Atlantic/Gulf of Mexico region and additional available equipment staged throughout the U.S. MSRC equipment staged throughout the Gulf of Mexico includes oil spill response vessels, fast response vessels, oil spill response barges, platform supply vessels, and shallow water barges. Various equipment is outfitted with x-band radar and infrared technology for detecting surface oil. Additional MSRC capabilities and a complete equipment listing are available online at http://www.msrc.org/.

Anadarko is a member of the Marine Well Containment Company (MWCC). In the event of an incident, MWCC can provide a 15,000 psi single ram capping stack and dispersant injection capability. MWCC can install and operate the interim containment system, including subsea flowlines, manifolds, and risers. The interim system is engineered to be used in depths up to 10,000 ft (3,048 m) and has the capacity to contain 60,000 bbl of liquid per day (and 120 million standard cubic feet per day of gas) with potential for expansion.

Additionally, MWCC offers its members access to equipment, instruments, and supplies for marine environmental sampling and monitoring in the event of an oil spill in the Gulf of Mexico. Members have access to a mobile Laboratory Container, Operations Container, and Launch and Recovery System (LARS) that enable water sampling and monitoring to water depths of 9,843 ft (3,000 m). The two 8 ft \times 20 ft (2.4 m \times 6.1 m) containers have been certified for offshore use by Det Norske Veritas and the American Bureau of Shipping. The LARS is a combined winch, A-frame, and 9,843 ft (3,000 m) long cable, customized for the instruments in the containers.

The containers are designed to enable rapid mobilization of necessary equipment to an incident site, including redundant systems to avoid downtime and supplies for sample handling and storage. Once deployed on a suitable vessel, the mobile containers then act as work spaces for scientists and operations personnel.

See DOCD Section I for a detailed description of Anadarko's site-specific spill response measures for the plan.

B. Affected Environment

The lease area is approximately 213 miles (343 km) from the nearest shoreline (Louisiana), 232 miles (373 km) from the onshore support base at Port Fourchon, Louisiana, and 250 miles (402 km) from the helicopter base at Houma, Louisiana (**Figure 1**). The water depth at the location of the proposed activities ranges between 6,828 and 7,393 ft (2,081 to 2,253 m) (**Figure 2**).

The seafloor location where the proposed activities will occur is smooth and featureless. No high-density deepwater benthic or chemosynthetic communities, or archaeological avoidance zones were noted within 2,000 ft (610 m) (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017)

A detailed description of the regionally affected environment, including meteorology, oceanography, geology, air and water quality, benthic communities, threatened and endangered species, biologically sensitive resources, archaeological resources, socioeconomic conditions, and other marine uses is provided by BOEM (2012a, 2013a, 2014a, 2015, 2016b, 2017a, b). These regional descriptions remain valid and are incorporated by reference. Brief descriptions of each potentially affected resource, including site-specific or new information if available, are presented in **Section C**.

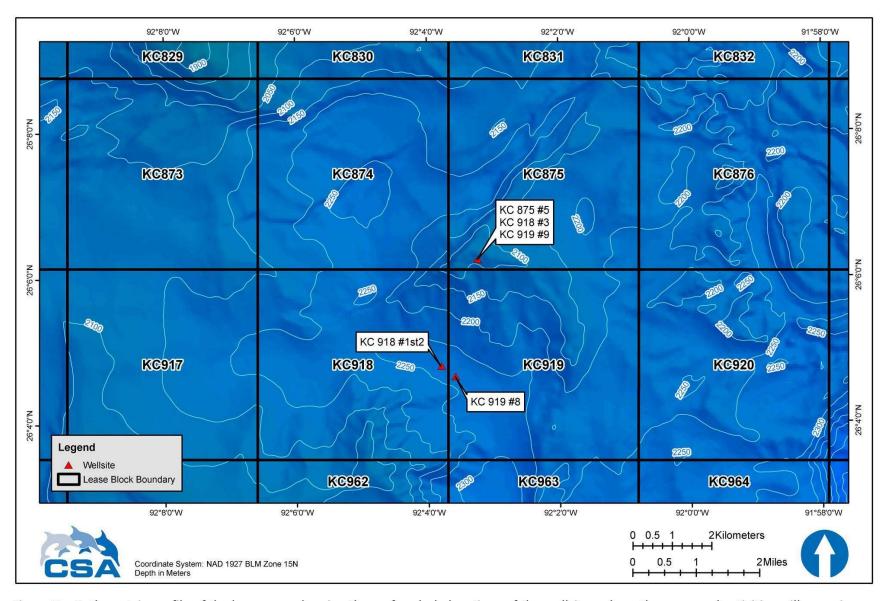


Figure 2. Bathymetric profile of the lease area showing the surface hole locations of the wellsites where the proposed activities will occur in Keathley Canyon Blocks 875, 918, and 919. Naming convention of the wellsites is based on the bottom hole locations.

C. Impact Analysis

This section analyzes the potential direct and indirect impacts of routine activities and accidents. Impacts have been analyzed extensively in multisale EISs for the Western and Central Gulf of Mexico Planning Areas (BOEM, 2012a, 2013b, 2014a, 2015, 2017a, b). The information in these documents is incorporated by reference. The following sections are organized by the environmental resources identified in **Table 2**, and address each potential IPF. Potential site-specific issues are addressed in this section.

C.1 Physical/Chemical Environment

C.1.1 Air Quality

There are no site-specific air quality data for the project area due to the distance from shore. However, because of the distance from shore-based sources of pollution and the lack of sources of pollutants offshore, air quality at the wellsites is expected to be good. The attainment status of federal OCS waters is unclassified because there is no provision in the Clean Air Act for classification of areas outside state waters (BOEM, 2012a).

In general, the ambient air quality of coastal counties along the Gulf of Mexico is relatively good (BOEM, 2012a). As of February 2018, Mississippi, Alabama, and Florida Panhandle coastal counties are in attainment of the National Ambient Air Quality Standards (NAAQS) for all criteria pollutants. St. Bernard Parish in Louisiana is a nonattainment area for sulfur dioxide based on the 2010 standard. Houston-Galveston-Brazoria in Texas is a nonattainment area for 8-hr ozone based on the 1997 and 2008 standards, and one coastal metropolitan area in Florida (Tampa) is a nonattainment area for lead based on the 2008 standard (USEPA, 2018).

As noted earlier, based on calculations made pursuant to applicable regulations, emissions from installation activities are not expected to be significant because they are below exemption levels. Therefore, the only potential effects to air quality would be from air pollutant emissions associated with routine operations, and accidental spills (a small diesel fuel spill or a large oil spill). These IPFs with potential impacts listed in **Table 2** are discussed below.

Impacts of Air Pollutant Emissions

Offshore air pollutant emissions are the only routine IPF likely to affect air quality. Offshore air pollutant emissions will result from installation vessels, helicopter, and support vessel operations. These emissions occur mainly from combustion or burning of diesel fuel and Jet-A aircraft fuel. The combustion of fuels occurs primarily in diesel-powered generators, pumps, or motors as well as from lighter fuel motors. Primary air pollutants typically associated with OCS activities are suspended PM, SO_x, NO_x, VOCs, and CO. As noted by BOEM (2017b), air pollutant emissions from routine activities are projected to have minimal impacts to onshore air quality because of the prevailing atmospheric conditions, anticipated emission rates, anticipated heights of emission sources, and the distance from shore of the proposed activities and associated pollutant concentrations. The Air Quality Emissions Report (see DOCD Section H) prepared in accordance with BOEM requirements shows that the projected emissions are below exemption levels. Given the levels of expected emissions and the distance of the project from shore, emissions from the proposed activities described in this DOCD are not likely to contribute to violations of any NAAQS on shore. Therefore, according to 30 CFR 550.303, the emissions

would not significantly affect the air quality of the onshore area for any of the criteria pollutants.

Greenhouse gas emissions contribute to climate change, with important impacts on temperature, rainfall, frequency of severe weather, ocean acidification, and sea level rise (Intergovernmental Panel on Climate Change, 2014). Carbon dioxide and methane emissions from the project would constitute a small incremental contribution to greenhouse gas emissions from all OCS activities. According to Programmatic and OCS lease sale EISs (BOEM, 2012a, 2016a), estimated carbon dioxide emissions from OCS oil and gas sources represent 0.4% of the U.S. total. Greenhouse gas emissions from the proposed project represent a negligible contribution to the total greenhouse gas emissions from reasonably foreseeable activities in the Gulf of Mexico area and would not significantly alter any climate change impacts evaluated in the Programmatic EIS (BOEM, 2016a).

The Breton Wilderness Area, in coastal Louisiana, which is part of the Breton National Wildlife Refuge (NWR), is designated under the Clean Air Act as a Prevention of Significant Deterioration Class I air quality area. BOEM is required to notify the National Park Service and U.S. Fish and Wildlife Service (USFWS) if emissions from proposed projects may affect the Breton Class I area. Additional review and mitigation measures may be required for sources that exceed emission limits agreed upon by the administering agencies within 186 miles (300 km) of the Breton Class I area (National Park Service, 2010). The lease area is approximately 285 miles (459 km) from the Breton Wilderness Area. Based on Anadarko's Air Quality Emissions report (DOCD Section H), no significant impacts on coastal air quality are expected, including in the Breton Wilderness Area. Anadarko will comply with all BOEM requirements regarding air emissions.

Impacts of a Small Diesel Fuel Spill

Potential impacts of a small diesel spill on air quality are expected to be consistent with those analyzed and discussed by BOEM (2012a, 2015, 2016b, 2017a, b). **Section A.9.1** discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I includes a detailed discussion of the spill response measures that would be employed. Given the open ocean location of the lease area, the extent and duration of air quality impacts from a small spill are not likely to be significant.

A small diesel fuel spill would affect air quality near the spill site by introducing VOCs into the atmosphere through evaporation. The ADIOS2 model (**Section A.9.1**) indicates that more than 90% of a small diesel spill would evaporate or disperse within 24 hours. The sea surface area covered with small diesel fuel would range from 0.5 to 5 ha (1.2 to 12.4 ac), depending on sea state and weather conditions.

A small diesel fuel spill would not likely affect coastal air quality because the spill would not be expected to make landfall or reach coastal waters prior to natural dispersion (**Section A.9.1**).

Impacts of a Large Oil Spill

Potential impacts of a large oil spill on air quality are expected to be consistent with those analyzed and discussed by BOEM (2012a, 2015, 2016b, 2017a, b).

A large oil spill could affect air quality by introducing VOCs into the atmosphere through evaporation from the slick. The extent and persistence of impacts would depend on the meteorological and oceanographic conditions at the time and the effectiveness of spill response

measures. Real-time wind and current data from the project area would be available at the time of a spill and would be used to assess the fate and effects of VOCs released. Additional air quality impacts could occur if response measures included *in situ* burning of the floating oil. Burning would generate a plume of black smoke and result in emissions of NO_x , SO_x , CO, and PM as well as other greenhouse gases. However, *in situ* burning would occur as a response measure only if authorized by the USEPA.

Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability; **Table 3**). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida. However, due to the lease area's distance from the nearest shoreline, most adverse impacts to air quality are likely to occur in offshore waters, and substantial impacts to onshore air quality are not expected.

C.1.2 Water Quality

There are no site-specific baseline water quality data for the lease area. Due to the lease location being in deep, offshore waters, water quality is expected to be good, with low levels of contaminants. Deepwater areas in the northern Gulf of Mexico are relatively homogeneous with respect to temperature, salinity, and oxygen (BOEM, 2017a). Kennicutt (2000) noted that the deepwater region has little evidence of contaminants in the dissolved or particulate phases of the water column. However, there are localized occurrences of natural seepage of oil, gas, and brines in near-surface sediments and up through the water column. Based on the site clearance letters for the wellsites where the proposed activities will occur, no natural seeps were noted (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017). IPFs that could affect water quality are effluent discharges associated with routine operations and two types of accidents (a small diesel fuel spill and a large oil spill). These IPFs with potential impacts listed in **Table 2** are discussed below.

Impacts of Effluent Discharges

Treated sanitary and domestic wastes, including those from support vessels, may have a slight transient effect on water quality in the immediate vicinity of these discharges. Treated sanitary and domestic wastes may have elevated levels of nutrients, organic matter, and chlorine but should dilute rapidly to undetectable levels within tens to hundreds of meters from the source. All NPDES permit limitations and requirements, as well as USCG regulations (as applicable), will be met; therefore, little or no impact on water quality from the overboard release of treated sanitary and domestic wastes is anticipated.

Deck drainage includes all effluents resulting from rain, deck washings, and runoff from gutters, and drains, including drip pans in work areas. Rainwater that falls on uncontaminated areas will flow overboard without treatment. However, rainwater that falls on the other areas such as chemical storage areas and places where equipment is exposed will be collected and oil and water separated prior to discharge to meet NPDES permit requirements. Based on adherence to permit limits and applicable regulations, little or no impact on water quality from deck drainage is anticipated.

Other discharges in accordance with the NPDES permit, such as non-pollutant completion fluids, uncontaminated wash, ballast and bilge water, and non-contact cooling and fire water are expected to dilute rapidly, resulting in little or no impact on water quality.

Impacts of a Small Diesel Fuel Spill

Potential impacts of a small diesel spill on water quality are expected to be consistent with those analyzed and discussed by BOEM (2012a, 2015, 2016b, 2017a, b). **Section A.9.1** discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures in addition to the summary information provided in the EIA.

The water-soluble fractions of diesel are dominated by two- and three-ringed PAHs, which are moderately volatile (National Research Council, 2003a). The molecular weight of diesel oil constituents are light to intermediate and can be readily degraded by aerobic microbial oxidation. Diesel oil is much lighter than water (specific gravity is between 0.83 and 0.88, compared to 1.03 for seawater). When spilled on water, diesel oil spreads very quickly to a thin film of rainbow and silver sheens, except for marine diesel, which may form a thicker film of dull or dark colors. However, because diesel oil has a very low viscosity, it is readily dispersed into the water column when winds reach 5 to 7 knots or with breaking waves (NOAA, 2017a). It is possible for the diesel oil that is dispersed by wave action to form droplets that are small enough be kept in suspension and moved by the currents.

Diesel dispersed in the water column can adhere to suspended sediments, but this generally occurs only in coastal areas with high suspended solid loads (National Research Council, 2003a) and would not be expected to occur to any appreciable degree in offshore waters of the Gulf of Mexico.

It is estimated that more than 90% of a small diesel spill would evaporate or disperse within 24 hours (Section A.9.1). The sea surface area covered with a very thin layer of diesel fuel would range from 0.5 to 5 ha (1.2 to 12.4 ac), depending on sea state and weather conditions. In addition to removal by evaporation, constiuents of diesel oil are readily and completely degraded by naturally occurring microbes (NOAA, 2006). Given the open ocean location of the lease area, the extent and duration of water quality impacts from a small spill are not expected to be significant.

Impacts of a Large Oil Spill

Potential impacts of a large oil spill on water quality are expected to be consistent with those analyzed and discussed by BOEM (2012a, 2015, 2016b, 2017a, b). Most of the spilled oil would be expected to form a slick at the surface, though small droplets in the water may adhere to suspended sediments and be removed from the water column (Operational Science Advisory Team, 2010). Information from the Macondo spill indicates that plumes of submerged oil droplets can be produced when subsea dispersants are applied at the wellhead (Camilli et al., 2010, Hazen et al., 2010, NOAA, 2011a, b, c). Subsea dispersants would be applied only after approval from the USEPA.

Analyses of the full set of samples associated with the Macondo spill have confirmed that the application of subsurface dispersants resulted in subsurface hydrocarbon plumes (Spier et al., 2013). A report by Kujawinski et al. (2011) indicates that chemical components of subsea dispersants used during the Macondo spill persisted for up to 2 months and were detected up to

186 miles (300 km) from the wellsite in water depths of 3,280 to 3,937 ft (1,000 to 1,200 m). Although dispersants were detected by laboratory analysis in 353 of the 4,114 water samples, concentrations were significantly below the chronic screening level for dispersants (BOEM, 2012a).

Hazen et al. (2010) studied the impacts and fate of deepwater oil. Initial studies suggested that the potential exists for rapid intrinsic bioremediation (bacterial degradation) of subsea dispersed oil in the water column by deep-sea indigenous microbial activity without significant oxygen depletion (Hazen et al., 2010), although other studies showed that oil bioremediation caused oxygen drawdown in deep waters (Kessler et al., 2011, Dubinsky et al., 2013). Additional studies investigated the effects of deepwater dissolved hydrocarbon gases (e.g., methane, ethane, propane) and the microbial response to a deepwater oil spill. Results suggest deepwater dissolved hydrocarbon gases may promote rapid hydrocarbon respiration by low-diversity bacterial blooms, thus priming indigenous bacterial populations for rapid hydrocarbon degradation of subsea oil (Kessler et al., 2011, Du and Kessler, 2012, Valentine et al., 2014). A 2017 study identified water temperature, taxonomic composition of the initial bacterial community, and dissolved nutrient levels as factors that may regulate oil degradation rates by deep-sea indigenous microbes (Liu et al., 2017).

The extent and persistence of impacts would depend on the meteorological and oceanographic conditions at the time and the effectiveness of spill response measures. Weathering processes that affect spilled oil on the sea include adsorption (sedimentation), biodegradation, dispersion, dissolution, emulsification, evaporation, and photo-oxidation. Most crude oil blends will emulsify quickly when spilled, creating a stable mousse that presents a more persistent cleanup and removal challenge (NOAA, 2017b).

Because of the lease area's distance from the nearest shoreline, it is expected that most water quality impacts would occur in offshore waters. Depending on the spill trajectory and the effectiveness of spill response measures, coastal water quality could be affected. Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability; **Table 3**). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida.

C.2 Seafloor Habitats and Biota

According to BOEM (2016a), existing information for the deepwater Gulf of Mexico indicates that the seafloor is composed primarily of soft sediments; exposed hard substrate habitats and associated biological communities are rare. The water depth at the location of the proposed activities ranges from approximately 6,828 to 7,393 ft (2,081 to 2,253 m) (Figure 2). Based on the site clearance letters for wellsites where the proposed activities will occur, no high-density deepwater benthic or chemosynthetic communities are located within 2,000 ft (610 m) of the location of the proposed activities (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017).

C.2.1 Soft Bottom Benthic Communities

There are no site-specific benthic community data from the lease area. However, data from the Northern Gulf of Mexico Continental Slope Habitats and Benthic Ecology Study (Wei, 2006, Rowe and Kennicutt, 2009, Wei et al., 2010, Carvalho et al., 2013) can be used to describe

typical baseline benthic communities that occur at similar water depths elsewhere in the region. **Table 5** summarizes data collected at nearby stations in water depths similar to the proposed activities area.

Table 5. Baseline benthic community data from stations near the lease area and in similar water depths sampled during the Northern Gulf of Mexico Continental Slope Habitats and Benthic Ecology Study. Adapted from: Wei (2006) and Rowe and Kennicutt (2009).

	Faunal	Water	Density						
Station	Faunal Zone	Depth (m)	Meiofauna (individuals m ⁻²)	Macroinfauna (individuals m ⁻²)	Megafauna (individuals ha ⁻¹)				
NB4	3W	2,042	148,409	1,443					
В3	3W	2,618	155,817	814	362				

Meiofaunal and megafaunal densities from Rowe and Kennicutt (2009); macroinfaunal abundance from Wei (2006). -- = Data not available.

Densities of meiofauna (animals passing through a 0.5-mm sieve but retained on a 0.062-mm sieve) at sampling stations in the vicinity of the lease area ranged from approximately 148,000 to 156,000 individuals m⁻² (Rowe and Kennicutt, 2009) (**Table 5**). Nematodes, nauplii (crustacean larvae), and harpacticoid copepods were the three dominant meiofaunal groups, accounting for approximately 90% of total abundance.

The benthic macroinfauna is characterized by small mean individual sizes and low densities, both of which reflect the intrinsically low primary production in surface waters of the Gulf of Mexico continental slope (Wei, 2006). Based on an equation presented by Wei (2006) in which densities decrease exponentially with water depth, the macroinfaunal density at the water depths in the project area (approxaimtely 6,828 to 7,393 ft [2,081 to 2,253 m]) is expected to range from approximately 1,281 to 1,455 individuals m⁻²; however, actual densities at the proposed project location are unknown. Macroinfauna densities at stations in the vicinity of the proposed wellsites ranged from 814 to 1,443 individuals m⁻² (**Table 5**).

Polychaetes typically are the most abundant macroinfaunal group on the northern Gulf of Mexico continental slope, followed by amphipods, tanaids, bivalves, and isopods. Carvalho et al. (2013) found polychaete abundance to be higher in the central region compared to the eastern and western regions. Wei (2006) recognized four depth-dependent faunal zones (1 through 4), two of which are divided horizontally. The lease area is in Zone 3W, which consists of stations on the mid Texas-Louisiana Slope ranging in depth from 6,152 to 9,869 ft (1,875 to 3,008 m). The most abundant species in this zone were the polychaetes *Levinsenia uncinata*, *Paraonella monilaris*, and *Tachytrypane* sp. A; the bivalve *Heterodonta* sp. B; and the isopod *Macrostylis* sp.

Megafaunal density from a nearby station was 362 individuals ha⁻¹ (**Table 5**). Common megafauna included motile groups such as decapods, ophiuroids, holothurians, and demersal fishes, as well as sessile groups such as sponges and anemones.

Bacteria also are an important component in terms of biomass and cycling of organic carbon (Cruz-Kaegi, 1998). For example, in deep-sea sediments, Main et al. (2015) observed that microbial oxygen consumption rates increased and bacterial biomass decreased with hydrocarbon contamination. Bacterial biomass at the depth range of the lease area typically is 1 to 2 g C m⁻² in the top 6 in. (15 cm) of sediments (Rowe and Kennicutt, 2009).

The only IPFs that may affect benthic communities from this project are the physical disturbance to the seafloor in the immediate vicinity of installation activities, effluent discharges, and potential effects from a large oil spill resulting from a well blowout at the seafloor. Effluent discharges at the surface and a small diesel fuel spill would not affect benthic communities because both would float and dissipate on the sea surface. The IPFs with potential impacts to soft bottom benthic communities listed in **Table 2** are discussed below.

Impacts of Physical Disturbance to the Seafloor

There will be minimal disturbance to the seafloor and soft bottom communities during installation of subsea infrastructure including the flowline and umbilical. Physical disturbance of the seafloor will be limited to the proximal area immediately adjacent to the infrastructure installation.

Soft bottom communities are ubiquitous along the northern Gulf of Mexico continental slope (Gallaway, 1988, Gallaway et al., 2003, Rowe and Kennicutt, 2009), and impacts from the physical disturbance of the seafloor during this project will be localized and likely will have no significant impact on soft bottom benthic communities in the region due to distance of the wellsites from these communities.

Impacts of a Large Oil Spill

The most likely effects on benthic communities of a subsea blowout of oil would be within a few hundred meters of the wellsite. BOEM (2012b) estimated that a severe subsurface blowout could resuspend and disperse sediments within a 984 ft (300 m) radius. While coarse sediments (sands) would probably settle at a rapid rate within 1,312 ft (400 m) of the blowout site, fine sediments (silts and clays) could be resuspended for more than 30 days and dispersed over a much wider area. Based on previous studies, surface sediments at the project area are assumed to largely be silt and clay (Rowe and Kennicutt, 2009).

Oil contact could result in smothering or toxicity to benthic organisms. Any affected area would be recolonized by benthic organisms over a period of months to years (National Research Council, 1983). While impacts on benthic communities from large oil spills are anticipated to be confined to the immediate vicinity of the wellhead, depending on the specific circumstances of the incident, additional benthic community impacts could extend beyond the immediate vicinity of the wellhead (BOEM, 2016b). During the Macondo spill, the use of subsea dispersants at the wellhead caused the formation of subsurface plumes (NOAA, 2011c, Spier et al., 2013). The subsurface plumes were reported in water depths of approximately 3,600 ft (1,097 m), extending at least 22 miles (35 km) from the wellsite and persisting for more than a month (Camilli et al., 2010). Montagna et al. (2013) mapped the benthic footprint of the Macondo spill and estimated that the most severe impacts to soft bottom benthic communities (e.g., reduction of faunal abundance and diversity) extended 4.8 miles (7.7 km) from the wellhead in all directions, covering an area of approximately 9.3 miles² (24 km²). Moderate impacts were observed up to 10.6 miles (17 km) to the southwest and 5.3 miles (8.5 km) to the northeast of the wellhead, covering an area of 57 miles2 (148 km2). NOAA (2016b) documented a footprint of over 772 miles² (2,000 km²) of impacts to benthic habitats surrounding the Macondo spill site. The analysis also identified a larger area of approximately 3,552 miles² (9,200 km²) of potential exposure and uncertain impacts to benthic communities (NOAA, 2016b).

While the behavior and impacts of subsurface oil plumes are not well known, the Macondo findings indicate that benthic impacts could extend beyond the immediate vicinity of the wellsite, depending on the extent, trajectory, and persistence of the plume. Baguley et al. (2015) studied the meiofaunal benthic community response to the Macondo spill and noted that while nematode abundance increased with proximity to the Macondo wellhead, copepod abundance, relative species abundance, and diversity decreased. Baguley et al. (2015) hypothesized that the increase in nematode abundance with the proximity to the spill location could potentially represent a balance between organic enrichment and toxicity. Similarly, Reuscher et al. (2017) sampled soft-bottom infauna in both impacted and non-impacted areas from the Macondo spill and found that while meiofauna and macrofauna abundance did not differ between the two areas, community diversity was significantly lower in areas that were impacted by Macondo oil. Demopoulos et al. (2016) reported abnormally high variability in meiofaunal and macrofaunal density in areas near the Macondo wellhead, which supports the Valentine et al. (2014) supposition that hydrocarbon deposition and impacts in the vicinity of the Macondo wellhead were patchy.

C.2.2 High-Density Deepwater Benthic Communities

As defined by NTL 2009-G40, high-density deepwater benthic communities are features or areas that could support chemosynthetic communities, deepwater corals, and other associated hard bottom communities. Chemosynthetic communities were discovered in the central Gulf of Mexico in 1984 and have been studied extensively (e.g., Volkes, 1963, Boland, 1986, Callender et al., 1990, MacDonald, 2002). Deepwater coral communities are also known from numerous locations in the Gulf of Mexico (Brooke and Schroeder, 2007, CSA International, 2007, Brooks et al., 2012). These communities occur almost exclusively on exposed authigenic carbonate rock created by a biogeochemical (microbial) process.

The installation vessels will disturb the seafloor only in the immediate vicinity of the infrastructure installation locations. Based on the site clearance letters (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017), there is no evidence of the presence of high-density deepwater benthic or chemosynthetic communities within 2,000 ft (610 m) of the project area. The nearest known high-density deepwater benthic community is located in Garden Banks Block 476, approximately 95 miles (153 km) north of the project area (MacDonald et al., 1995, U.S. Geological Survey, 2011, BOEM, nd).

The only IPF identified for this project that could affect high-density deepwater benthic communities is a large oil spill from a well blowout at the seafloor. A small diesel fuel spill would not affect benthic communities because the diesel fuel would float and dissipate on the sea surface. Physical disturbance and effluent discharge are not considered to be IPFs for deepwater benthic communities, because these communities are not known to be present within in the immediate vicinity of the proposed activities.

Impacts of a Large Oil Spill

A large oil spill caused by a seafloor blowout could cause direct physical alteration of the seafloor (e.g., formation of a caldera) within approximately 984 ft (300 m) of the wellhead (BOEM, 2012a). Based on the site clearance letters for the wellsites where the proposed activities will occur there is no evidence of the presence of high-density deepwater benthic or chemosynthetic communities within 2,000 ft (610 m) (AOA Geophysics Inc, 2010a, b, Fugro

Marine Geoservices, 2017). Therefore, a caldera, if formed would not be expected to impact any high-density deepwater benthic or chemosynthetic communities.

Additional benthic community impacts could extend beyond the immediate vicinity of the blowout location, depending on the specific circumstances (BOEM, 2016b). During the Macondo spill, subsurface plumes were reported at a water depth of approximately 3,600 ft (1,097 m), extending at least 22 miles (35 km) from the wellsite and persisting for more than a month (Camilli et al., 2010). While the behavior and impacts of subsurface plumes are not well known, a subsurface plume could have the potential to contact high-density deepwater benthic communities beyond the 984 ft (300 m) radius estimated by BOEM (2012a), depending on its extent, trajectory, and persistence (Spier et al., 2013). Oil plumes that contact sensitive benthic communities before degrading could potentially impact the resource (BOEM, 2017a). Potential impacts on sensitive resources would be an integral part of the decision and approval process for the use of dispersants, and such approval would be obtained from the USEPA prior to the use of dispersants.

Potential impacts of oil on high-density deepwater benthic communities are discussed in recent EISs (BOEM, 2012a, 2015, 2016b, 2017a, b). Although chemosynthetic communities live among hydrocarbon seeps, natural seepage is consistent and occurs at low rates compared to the potential rates of oil release from a blowout. In addition, seep organisms also require unrestricted access to oxygenated water at the same time as exposure to hydrocarbon energy sources (MacDonald, 2002). Oil droplets or oiled sediment particles could come into contact with chemosynthetic organisms or deepwater corals. As discussed by BOEM (2012a, 2017a, b), impacts could include losses of habitat, biodiversity, and live coral coverage; destruction of hard substrate; change in sediment characteristics; and reduction or loss of one or more commercial and recreational fishery habitats. Sublethal effects could be long-lasting and affect the resilience of coral colonies to natural disturbances (e.g., elevated water temperature, diseases) (BOEM, 2012a, 2015, 2016b, 2017a, b). Based on information learned from the Macondo spill, a few patches of live bottom habitats may be affected by a large oil spill, but the Gulf-wide ecosystem of live bottom communities would not be expected to suffer significant effects (BOEM, 2016b).

The potential for a large spill to affect deepwater corals can also be inferred based on the impacts of the Macondo spill during an October 2010 survey of deepwater coral habitats near the Macondo spill site (BOEMRE, 2010). Government and academic researchers were working at a site 4,600 ft (1,400 m) deep and approximately 7 miles (11 km) southwest of the Macondo wellhead when they observed dead and dying corals with sloughing tissue and discoloration. Much of the soft coral observed in an area measuring approximately 50 ft \times 130 ft (15 m \times 40 m) was covered by what appeared to be a brown flocculent substance. Of 40 large corals, 90% were heavily affected, showing dead or dying parts and discoloration. Another site 1,312 ft (400 m) farther away had a colony of stony corals similarly affected and partially covered with a similar brown substance. Based on hopanoid petroleum biomarkers from the brown flocculent substance, researchers concluded that the colony contained oil from the Macondo spill. The injured and dead corals were in an area where a subsea plume of oil had been documented during the spill in June 2010. Corals elsewhere in the Gulf of Mexico outside the area affected by the plume did not appear to be experiencing higher mortality. The research team concluded that the observed coral injuries likely resulted from exposure to the subsurface oil plume (White et al., 2012). Apparent recovery of some affected areas by March 2012 correlated negatively with the proportion of the coral covered with flocculent in late 2010 (Hsing et al., 2013), Fisher et al. (2014b) reported two additional coral areas affected by the Macondo spill, one 4 miles

(6 km) south of the Macondo wellsite and the other 14 miles (23 km) to the southeast; the authors also hypothesized that other hard bottom sites probably were exposed to deepwater plumes, sinking oil residues from surface burning, or oil and dispersant contained in marine snow. In addition to direct impacts on corals and other sessile epifauna, the spill also affected macroinfauna associated with these hard bottom communities (Fisher et al., 2014a).

C.2.3 Designated Topographic Features

The lease area is not within or near any designated topographic features or no-activity zones as identified in NTL 2009-G39. The nearest designated Topographic Feature Stipulation Block is located approximately 117 miles (188 km) north of the lease area. There are no IPFs associated with routine operations that could cause impacts to designated topographic features.

Due to the distance from the lease area, it is unlikely that designated topographic features would be affected by accidental spills. A small diesel fuel spill would float and dissipate on the surface and would not reach these seafloor features. In the event of an oil spill from a well blowout, a surface slick would not contact these seafloor features. If a subsurface plume were to occur, impacts on these features would be unlikely due to the distance and the difference in water depth. Near-bottom currents in the region are predicted to flow along the isobaths (Nowlin et al., 2001) and typically would not be expected to carry a plume up onto the continental shelf edge. This assumption is consistent with the deposition patterns inferred by Valentine et al. (2014) for the subsurface plume from the Macondo spill. Felder et al. (2014) hypothesized that the Macondo spill may have affected two topographic features located 96 miles (155 km) and 168 miles (270 km) west of the Macondo site (Sackett Bank and Ewing Bank, respectively), but there was no definitive evidence of Macondo oil from either bank. Although a large oil spill could theoretically result in oil contacting topographic features, it is expected that most of the oil would rise to the surface and that the most heavily oiled sediments would likely be deposited before reaching these features (BOEM, 2012a). In the unlikely event that oil does contact topographic features, any contact with spilled oil would be unlikely to cause lethal effects to benthic organisms because the distance between the spill source and topographic features would likely prevent concentrated oil from contacting any designated feature.

C.2.4 Pinnacle Trend Area Live Bottoms

The lease area is not covered by the Live Bottom (Pinnacle Trend) Stipulation. As defined by NTL 2009-G39, the nearest Pinnacle Stipulation Block is located approximately 302 miles (486 km) northeast of the lease area. There are no IPFs associated with routine operations that could cause impacts to pinnacle trend area live bottoms due to the distance from the lease area.

Due to their distance from the lease area, it is unlikely that pinnacle trend live bottom areas would be affected by an accidental spill. A small diesel fuel spill would float on the surface and would not reach these seafloor features. In the event of an oil spill from a well blowout, a surface slick would be unlikely to contact these seafloor features. If a subsurface plume were to occur, impacts on these features would be unlikely due to the difference in water depth. Near-bottom currents in the region are predicted to flow along the isobaths (Nowlin et al., 2001) and would not be expected to carry a plume up onto the continental shelf edge. This assumption is consistent with the deposition patterns inferred by Valentine et al. (2014) for the subsurface plume from the Macondo spill. Although there are mechanisms that could result in

oil contacting these features, it is expected that most of the oil would rise to the surface and thereby reducing potential impacts to these features.

C.2.5 Eastern Gulf Live Bottoms

The lease area is not covered by the Live Bottom (Low-Relief) Stipulation, which pertains to seagrass communities and low-relief hard bottom reefs within the Eastern Gulf of Mexico Planning Area blocks in water depths of 328 ft (100 m) or less and portions of Pensacola and Destin Dome Area blocks in the Central Gulf of Mexico Planning Area. The nearest block covered by the Live Bottom Stipulation, as defined by NTL 2009-G39, is located approximately 341 miles (549 km) northeast of the lease area. There are no IPFs associated with routine operations that could cause impacts to eastern Gulf live bottom areas due to the distance from the lease area.

Because of their distance from the lease area, it is unlikely that Eastern Gulf live bottom areas would be affected by an accidental spill. A small diesel fuel spill would float and dissipate on the surface and would not reach these seafloor features. In the event of an oil spill from a well blowout, a surface slick would not likely contact these seafloor features. If a subsurface plume were to occur, impacts on these features would be unlikely due the difference in water depth. Near-bottom currents in the region are predicted to flow along the isobaths (Nowlin et al., 2001) and typically would not be expected to carry a plume up onto the continental shelf. This assumption is consistent with the deposition patterns inferred by Valentine et al. (2014) for the subsurface plume from the Macondo spill. Although there are mechanisms that could result in oil contacting these features, it is expected that most of the oil would rise to the surface thereby reducing potential impacts to benthic communities.

C.3 Threatened, Endangered, and Protected Species and Critical Habitat

This section discusses species listed as endangered or threatened under the Endangered Species Act (ESA). In addition, it includes all marine mammal species in the region, which are protected under the Marine Mammal Protection Act (MMPA).

Endangered or threatened species that may occur in the project area and along the northern Gulf Coast are listed in **Table 6**. The table also indicates the location of corresponding critical habitats in the Gulf of Mexico. Critical habitat is defined as (1) specific areas within the geographical area occupied by the species at the time of listing, if they contain physical or biological features essential to conservation which may require special management considerations or protection; and (2) specific areas outside the geographical area occupied by the species if the agency determines that the area itself is essential for conservation. The National Marine Fisheries Service (NMFS) has jurisdiction for ESA-listed marine mamamls (cetaceans), sea turtles in the marine environment, and fishes in the Gulf of Mexico. The USFWS has jurisdiction for ESA-listed birds, the West Indian manatee, and sea turtles on their nesting beaches.

Table 6. Federally listed endangered and threatened species that could potentially occur in the lease area and along the northern Gulf Coast.

Cuasias	Caiautifia Nama	Chatura	Potential P	resence	Critical Habitat			
Species	Scientific Name	Status	Lease Area Coastal		Designated in Gulf of Mexico			
Marine Mammals								
Sperm whale	Physeter macrocephalus	E	Х	3	None			
Bryde's whale	Balaenoptera edeni ^a	Р	Х	19-00	None			
West Indian manatee	Trichechus manatus ^b	Т	=	Х	Florida (Peninsular)			
Sea Turtles								
Loggerhead turtle	Caretta caretta	T, E ^c	х	Х	Nesting beaches and nearshore reproductive habitat in Mississippi, Alabama, and Florida; Sargassum habitat including most of the central and western Gulf of Mexico			
Green turtle	Chelonia mydas	T	Х	Х	None			
Leatherback turtle	Dermochelys coriacea	E	Х	Х	None			
Hawksbill turtle	Eretmochelys imbricata	Е	Х	Х	None			
Kemp's ridley turtle	Lepidochelys kempii	E	Х	Х	None			
Birds			*					
Piping Plover	Charadrius melodus	т		х	Coastal Texas, Louisiana, Mississippi, Alabama, and Florida			
Whooping Crane	Grus americana	Е		Х	Coastal Texas (Aransas National Wildlife Refuge)			
Fishes								
Oceanic whitetip shark	Carcharhinus Iongimanus	Т	х	1 	None			
Gulf sturgeon	Acipenser oxyrinchus desotoi	Т	##	х	Coastal Louisiana, Mississippi, Alabama, and Florida			
Invertebrates								
Elkhorn coral	Acropora palmata	Т	<u></u>	х	The Florida Keys and the Dry Tortugas			
Lobed star coral	Orbicella annularis	Т		Х	None			
Mountainous star coral	Orbicella faveolata	Т		Х	None			
Boulder star coral	Orbicella franksi	Т	22	Х	None			
Terrestrial Mammals								
Beach mice (subspecies: Alabama, Choctawhatchee, Perdido Key, St. Andrew)	Peromyscus polionotus	E	- L	х	Alabama and Florida (Panhandle) beaches			

E = endangered; P = proposed; T = threatened; X = potentially present; -- = not present.

In 2007, NMFS and the USFWS issued a Biological Opinion in response to ESA consultations with MMS for previous EISs (NMFS, 2007). Following the Macondo spill, on 30 July 2010, BOEM reinitiated ESA consultation with NMFS and the USFWS. Currently, BOEM, NMFS, and USFWS

^a Gulf of Mexico Bryde's whales are protected by the Marine Mammal Protection Act. There is currently a proposed rule to list this stock as 'endangered' under the Endangered Species Act.

There are two subspecies of West Indian manatee: the Florida manatee (*T. m. latirostris*), which ranges from the northern Gulf of Mexico to Virginia, and the Antillean manatee (*T. m. manatus*), which ranges from northern Mexico to eastern Brazil. Only the Florida manatee subspecies is likely to be found in the northern Gulf of Mexico.

^c The loggerhead turtle is composed of nine distinct population segments (DPSs). The only DPS that may occur in the project area (Northwest Atlantic DPS) is listed as threatened (76 FR 58868; 22 September 2011).

are in the process of collecting and awaiting additional information that is being gathered as part of the Natural Resource Damage Assessment process in order to update the environmental baseline information as needed for this reinitiated Section 7 consultation. Consultation is ongoing at this time, and BOEM is acting as lead agency in the reinitiated consultation with BSEE involvement (BOEM, 2016b). BOEM and BSEE have developed an interim coordination and review process with NMFS and the USFWS for specific activities leading up to or resulting from upcoming lease sales. This interim coordination program remains in place while formal consultation and the development of a Biological Opinion are ongoing (BOEM, 2016b).

Coastal endangered or threatened species that may occur along the northern Gulf Coast include the West Indian manatee, Piping Plover, Whooping Crane, Gulf sturgeon, and four subspecies of beach mouse. Critical habitat has been designated for all of these species as indicated in **Table 6**, and is discussed for each species in individual sections. The Bald Eagle and Brown Pelican, which are no longer federally listed as endangered or threatened, are discussed in **Section C.4.2**.

The sperm whale, five species of sea turtles, and the oceanic whitetip shark are the only endangered or threatened species likely to occur in or near the lease area. The listed sea turtles are the leatherback turtle, Kemp's ridley turtle, hawksbill turtle, loggerhead turtle, and green turtle (Pritchard, 1997). Effective 11 August 2014, NMFS designated certain marine areas as critical habitat for the northwest Atlantic distinct population segment (DPS) of the loggerhead sea turtle (Section C.3.4). No critical habitat has been designated in the Gulf of Mexico for the leatherback turtle, Kemp's ridley turtle, hawksbill turtle, green turtle, the sperm whale, or the oceanic whitetip shark. Five endangered mysticetes (blue whale, fin whale, humpback whale, North Atlantic right whale, and sei whale) have been reported in the Gulf of Mexico, but are considered rare or extralimital (Würsig et al., 2000). These species are not included in the most recent NMFS stock assessment reports (Waring et al., 2016, Hayes et al., 2017) nor in the most recent BOEM multisale EIS (BOEM, 2017a); therefore, they are not considered further in the EIA.

Four threatened coral species are known from the northern Gulf of Mexico: elkhorn coral (*Acropora palmata*), lobed star coral (*Orbicella annularis*), mountainous star coral (*Orbicella faveolata*), and boulder star coral (*Orbicella franksi*). None of these species are expected to be present in the lease area (**Section C.3.10**).

There are no other endangered animals or plants in the Gulf of Mexico that are reasonably likely to be affected by either routine or accidental events. Other species occurring at certain locations in the Gulf of Mexico such as the smalltooth sawfish (*Pristis pectinata*) and Florida salt marsh vole (*Microtus pennsylvanicus dukecampbelli*) are remote from the lease area and highly unlikely to be affected by any accidental discharges.

C.3.1 Sperm Whale (Endangered)

The only endangered marine mammal likely to be present in or near the project area is the sperm whale (*Physeter macrocephalus*). Resident populations of sperm whales occur within the Gulf of Mexico. A species description is presented in the recovery plan for this species (NMFS, 2010b). Gulf of Mexico sperm whales are classified as an endangered species and a "strategic stock" by NMFS (Waring et al., 2016). A "strategic stock" is defined by the MMPA as a marine mammal stock that meets the following criteria:

- the level of direct human-caused mortality exceeds the potential biological removal level;
- based on the best available scientific information, it is in decline and is likely to be listed as a threatened species under the ESA within the foreseeable future; or
- is listed as a threatened or endangered species under the ESA, or is designated as depleted under the MMPA.

Current threats to sperm whale populations worldwide are discussed in a final recovery plan for the sperm whale (NMFS, 2010b). Threats are defined as "any factor that could represent an impediment to recovery," and include fisheries interactions, anthropogenic noise, vessel interactions, contaminants and pollutants, disease, injury from marine debris, research, predation and natural mortality, direct harvest, competition for resources, loss of prey base due to climate change and ecosystem change, and cable laying. In the Gulf of Mexico, impacts from many of these threats are identified as either low or unknown (BOEM, 2012a).

In 2013, NMFS conducted a status review to consider designating the Gulf of Mexico population of the sperm whale as a DPS under the ESA. The designation would list the Gulf of Mexico population as a separate endangered or threatened population that is "significant to the species and faces additional unique threats to its survival." On 13 November 2013, NMFS concluded that the designation of a Gulf of Mexico DPS for sperm whales was not warranted (78 FR 68032).

The distribution of sperm whales in the Gulf of Mexico is correlated with mesoscale physical features such as eddies associated with the Loop Current (Jochens et al., 2008). Sperm whale populations in the north-central Gulf of Mexico are present throughout the year (Davis et al., 2000a). Results of a multi-year tracking study show female sperm whales are typically concentrated along the upper continental slope between the 656- and 3,280-ft (200- and 1,000-m) depth contours (Jochens et al., 2008). Male sperm whales were more variable in their movements and were documented in water depths greater than 9,843 ft (3,000 m). Generally, groups of sperm whales sighted in the Gulf of Mexico during the MMS-funded Sperm Whale Seismic Study consisted of mixed-sex groups comprising adult females with juveniles, and groups of bachelor males. Typical group size for mixed groups was 10 individuals (Jochens et al., 2008). A review of sighting reports from seismic mitigation surveys in the Gulf of Mexico conducted over a 6-year period found a mean group size for sperm whales of 2.5 individuals (Barkaszi et al., 2012). In these mitigation surveys, sperm whales were the most common cetacean encountered. The Sperm Whale Seismic Study results also showed that sperm whales transit through the vicinity of the lease area. Movements of satellite-tracked individuals suggest that this area of the continental slope is within the home range of the Gulf of Mexico population (within the 95% utilization distribution) (Jochens et al., 2008).

IPFs potentially affecting sperm whales include installation vessel presence, noise, and lights; support vessel and helicopter traffic; and two types of accidents (a small diesel fuel spill and a large oil spill). Effluent discharges are likely to have negligible impacts on sperm whales due to rapid dispersion, the small area of ocean affected, the intermittent nature of the discharges, and the mobility of these marine mammals. Compliance with NTL BSEE-2015-G03 (**Table 1**) will minimize the potential for marine debris-related impacts on sperm whales. The IPFs with potential impacts listed in **Table 2** are discussed below.

Impacts of Installation Vessel Presence, Noise, and Lights

Noise from well completion and infrastrcuture installation has the potential to disturb individuals or groups of sperm whales or mask the sounds sperm whales would normally

produce or hear. Behavioral responses to noise by marine mammals vary widely and overall, are short-term and include, temporary displacement or cessation of feeding, resting, or social interactions (NMFS, 2009a, Gomez et al., 2016). Additionally, behavioral changes resulting auditory masking sounds may induce an animal to produce more calls, longer calls, or shift the frequency of the calls. For example, masking caused by vessel noise was found to result in a reduced number of whale calls in the Gulf of Mexico (Azzara et al., 2013).

NMFS (2016) lists sperm whales in the same hearing group (i.e., mid-frequency cetaceans) as dolphins, toothed whales, beaked whales, and bottlenose whales (estimated hearing range from 150 Hz to 160 kHz). Sperm whale sounds generally consist of clicks that have a bandwidth of 100 Hz to 30 kHz (Erbe et al., 2017). Acoustic energy peaks at around 15kHz, and is generally concentrated below 10 kHz, although diffuse energy up to and past 20 kHz is common (Weilgart and Whitehead, 1993, Goold and Jones, 1995, Møhl et al., 2003, Erbe et al., 2017). Source levels of clicks are generally 186 \pm 0.9 dB re 1 μ Pa_{rms} m with extremes up to 236 dB re 1 μ Pa_{rms} m (Møhl et al., 2003, Mathias et al., 2013). As discussed in **Section A.1**, noise from offshore operations can produce broadband (10Hz to 10kHz) sound pressure levels of approximately 190 dB re 1 μ Pa at 1 m (Hildebrand, 2005). Therefore, vessel-related noise is likely to be heard by sperm whales.

Animals can determine the direction from which a sound arrives based on cues, such as differences in arrival times, sound levels, and phases at the two ears. Thus, an animal's directional hearing capabilities have a bearing on its vulnerability to masking (National Research Council, 2003b). It is expected that, due to the relatively stationary nature of the proposed activities, sperm whales would move away from the proposed operations area, and noise levels that could cause auditory injury would be avoided. However, observations of sperm whales near offshore oil and gas operations suggest an inconsistent response to anthropogenic marine sound (Jochens et al., 2008). There are other OCS facilities and activities near the lease area, and the region as a whole has a large number of similar noise sources. Noise associated with this project will contribute to an increase in the ambient noise environment of the Gulf of Mexico, but it is not expected in amplitudes sufficient to cause auditory injuries to sperm whales. The proposed activity may cause disturbance effects; primarily avoidance or temporary displacement from the project area. While vessel noise is considered an IPF for sperm whales, vessel lighting and presence are not identified as IPFs for this species (NMFS, 2007, BOEM, 2012a, 2016b, 2017a, b).

Impacts of Support Vessel and Helicopter Traffic

Support vessel traffic has the potential to disturb sperm whales, and there is a risk of vessel strikes, which are identified as a threat in the recovery plan for this species (NMFS, 2010b). To reduce the potential for vessel strikes, BOEM issued NTL BOEM-2016-G01, which recommends protected species identification training and that vessel operators and crews maintain a vigilant watch for marine mammals and slow down or stop their vessel to avoid striking protected species. When whales are sighted, vessel operators and crews are required to attempt to maintain a distance of 300 ft (91 m) or greater whenever possible. Vessel operators are required to reduce vessel speed to 10 knots or less when safety permits and when mother/calf pairs, pods, or large assemblages of cetaceans are observed near an underway vessel. Compliance with this NTL will minimize the likelihood of vessel strikes as well as reduce the chance of disturbing sperm whales.

NMFS (2007) analyzed the potential for vessel strikes and harassment of sperm whales. With implementation of the mitigation measures in NTL BOEM-2016-G01, NMFS concluded that the likelihood of collisions between vessels and sperm whales would be reduced to insignificant levels. NMFS concluded that the observed avoidance of passing vessels by sperm whales is an advantageous response to avoid a potential threat and is not expected to result in any significant effect on migration, breathing, nursing, breeding, feeding, or sheltering to individuals, or have any consequences at the population level. With implementation of the vessel strike avoidance measures requirement to maintain a distance of 300 ft (91 m) from sperm whales, NMFS concluded that the potential for harassment of sperm whales would be reduced to discountable levels.

Dependent on flight altitude, helicopter traffic also has the potential to disturb sperm whales. Smultea et al. (2008) documented responses of sperm whales offshore Hawaii to a fixed-wing aircraft flying at an altitude of 800 ft (245 m). A reaction to the initial pass of the aircraft was observed during 3 of 24 sightings (12%). All three reactions consisted of a hasty dive and occurred at less than 1,180 ft (360 m) lateral distance from the aircraft. Additional reactions were seen when the aircraft circled certain whales to make further observations. Based on other studies of cetacean responses to sound, the authors concluded that the observed reactions to brief overflights by the aircraft were short-term and limited to behavioral disturbances.

Helicopters used in support operations maintain a minimum altitude of 700 ft (213 m) while in transit offshore, and the guidelines and regulations issued by NMFS under the authority of the MMPA specify that helicopters maintain an altitude of 1,000 ft (305 m) within 300 ft (91 m) of marine mammals. In the event that a whale is seen during transit, the helicopter will not approach or circle the animal. Although responses are possible, Smultea et al. (2008) and NMFS (2007) concluded that this altitude would minimize the potential for disturbing sperm whales. Therefore, no significant impacts are expected.

Impacts of a Small Diesel Fuel Spill

Potential spill impacts on marine mammals, including sperm whales, are discussed by NMFS (2007) and BOEM (2017a, b). Oil impacts on marine mammals are discussed by (Geraci and St. Aubin, 1990) and by the Marine Mammal Commission (MMC) (2011). For proposed activities in this DOCD, there are no unique site-specific issues with respect to spill impacts on sperm whales that were not analyzed in the previous documents.

The probability of a fuel spill will be minimized by Anadarko's preventative measures that will be implemented during routine operations, including fuel transfer. In the unlikely event of a spill, implementation of Anadarko's OSRP could mitigate and lessen the potential for impacts on sperm whales. Given the open ocean location of the lease area, the duration of a small spill and opportunity for impacts to occur would be very brief.

A small diesel fuel spill in offshore waters would produce a thin slick on the water surface and introduce concentrations of petroleum hydrocarbons and their degradation products. The extent and persistence of impacts would depend on the meteorological and oceanographic conditions at the time, the volume released, and the effectiveness of spill response measures. **Section A.9.1** discusses the likely fate of a small diesel fuel spill and indicates that more than 90% would evaporate or disperse naturally within 24 hours. Results of an ADIOS2 model run (**Section A.9.1**) indicate that the area of the sea surface with diesel fuel on it would range from 0.5 to 5 ha (1.2 to 12 ac), depending on sea state and weather conditions.

Direct physical and physiological effects to sperm whales due to exposure to diesel fuel could include skin irritation, inflammation, or necrosis; chemical burns of skin, eyes, and mucous membranes; inhalation of toxic fumes; ingestion of oil directly or via contaminated prey; and exposure to stress from the activities and noise of response vessels and aircraft (MMC, 2011). However, due to the limited areal extent and short duration of water quality impacts from a small diesel fuel spill, as well as the mobility of sperm whales, no significant impacts are expected.

Impacts of a Large Oil Spill

Potential spill impacts on marine mammals, including sperm whales, are discussed by NMFS (2007) and BOEM (2017a, b). Oil impacts on marine mammals are discussed by Geraci and St. Aubin (1990) and by the MMC (2011). For this DOCD, there are no unique site-specific issues with respect to spill impacts on sperm whales.

Impacts of oil spills on sperm whales can include direct impacts from oil exposure as well as indirect impacts due to response activities and materials (e.g., vessel traffic, noise, dispersants) (MMC, 2011). Direct physical and physiological effects can include skin irritation, inflammation, or necrosis; chemical burns of skin, eyes, and mucous membranes; inhalation of toxic fumes; ingestion of oil (and dispersants) directly or via contaminated prey; and stress from the activities and noise of response vessels and aircraft. The level of impact of oil exposure depends on the amount, frequency, and duration of exposure; route of exposure; and type or condition of petroleum compounds or chemical dispersants (Hayes et al., 2017). Complications from the previously listed exposures may lead to dysfunction of immune and reproductive systems, physiological stress, declining physical condition, and death. Behavioral responses can include displacement of animals from prime habitat, disruption of social structure, changing prey availability and foraging distribution or patterns, changing reproductive behavior/productivity, and changing movement patterns or migration (MMC, 2011). Ackleh et al. (2012) hypothesized that sperm whales may have temporarily relocated away from areas near the Macondo spill in 2010.

In the event of a large spill, the increased level of vessel and aircraft activity associated with spill response operations could disturb sperm whales and potentially result in vessel strikes, entanglement, or other injury or stress. Response vessels would operate in accordance with NTL BOEM-2016-G01 (**Table 1**) to reduce the potential for striking or disturbing these animals.

C.3.2 West Indian Manatee (Threatened)

Most of the Gulf of Mexico West Indian manatee (*Trichechus manatus*) population is located in peninsular Florida (USFWS, 2001). Critical habitat has been designated in southwest Florida in Manatee, Sarasota, Charlotte, Lee, Collier, and Monroe Counties. Manatee sightings in Louisiana have increased as the species extends its presence farther west of Florida in the warmer months (Wilson, 2003). A species description is presented in the recovery plan for this species (USFWS, 2001).

IPFs that could affect manatees include support vessel and helicopter traffic and a large oil spill. A small diesel fuel spill in the lease area would be unlikely to affect manatees due to the distance from the nearest shoreline. As explained in **Section A.9.1**, a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion. Compliance

with NTL BSEE-2015-G03 (see **Table 1**) will minimize the potential for marine debris-related impacts on manatees. The IPFs with potential impacts listed in **Table 2** are discussed below.

Impacts of Support Vessel and Helicopter Traffic

Support vessel traffic has the potential to disturb manatees, and there is a risk of vessel strikes, which are identified as a threat in the recovery plan for this species (USFWS, 2001). Manatees are expected to be limited to inner shelf and coastal waters, and impacts are expected to be limited to transiting of vessels and helicopters through these waters. To reduce the potential for vessel strikes vessel operators follow NTL BOEM-2016-G01, which recommends protected species identification training and that vessel operators and crews maintain a vigilant watch for marine mammals and slow down or stop their vessel to avoid striking protected species. Compliance with this NTL will minmize the likelihood of vessel strikes and no significant impacts on manatees are expected.

Dependent on flight altitude, helicopter traffic also has the potential to disturb manatees. Rathbun (1988) reported that manatees were disturbed more by helicopters than by fixed-wing aircraft; however, the helicopter was flown at relatively low altitudes of 66 to 525 ft (20 to 160 m). Helicopters used in support operations maintain a minimum altitude of 700 ft (213 m) while in transit offshore and guidelines and regulations issued by NMFS under the authority of the MMPA specify that helicopters maintain an altitude of 1,000 ft (305 m) within 300 ft (91 m) of marine mammals. This mitigation measure will minimize the potential for disturbing manatees, and no significant impacts are expected.

Impacts of a Large Oil Spill

Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability; **Table 3**). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida. This range does not include designated areas of manatee critical habitat in southwest Florida.

In the event that manatees are exposed to oil, effects could include direct impacts from oil exposure as well as indirect impacts due to response activities and materials (e.g., vessel traffic, noise, dispersants) (MMC, 2011). Direct physical and physiological effects can include asphyxiation, acute poisoning, lowering of tolerance to other stressors, nutritional stress, and inflammation of infection (BOEM, 2017a). Indirect impacts include stress from the activities and noise of response vessels and aircraft. Complications from oil exposure may lead to dysfunction of immune and reproductive systems, physiological stress, declining physical condition, and death. Behavioral responses can include displacement of animals from prime habitat, disruption of social structure, change in prey availability and foraging distribution or patterns, change in reproductive behavior/productivity, and change in movement patterns or migration (MMC, 2011).

In the event that a large spill reaches coastal waters where manatees are present, the increased level of vessel and aircraft activity associated with spill response could disturb manatees and potentially result in vessel strikes, entanglement, or other injury or stress. Response vessels would operate in accordance with NTL BOEM-2016-G01 (**Table 1**) to reduce the potential for striking or disturbing these animals, and therefore no significant impacts are expected.

C.3.3 Non-Endangered Marine Mammals (Protected)

Excluding the two endangered marine mammal species that were discussed in **Sections C.3.1** and **C.3.2**, there are 21 additional species of marine mammals that may be found in the Gulf of Mexico including one species of mysticete whale, the dwarf and pygmy sperm whales, four species of beaked whales, and 14 species of delphinid whales and dolphins. All marine mammals are protected species under the MMPA. The most common non-endangered cetaceans in the deepwater environment are odontocetes such as the pantropical spotted dolphin, spinner dolphin, and rough-toothed dolphin. A brief summary is presented in the following subsections; additional information on these groups is presented by BOEM (2017a).

Bryde's Whale. The Bryde's whale (Balaenoptera edeni) is the only year-round resident baleen whale in the northern Gulf of Mexico. In 2014, a petition was submitted to designate the northern Gulf of Mexico population as a DPS and list it as endangered under the ESA (Natural Resources Defense Council, 2014). This petition received a 90-day positive finding by NMFS in 2015 and is currently under consideration for listing. The Bryde's whale is most frequently sighted along the 328-ft (100-m) isobath (Davis and Fargion, 1996, Davis et al., 2000a). Most sightings have been made in the DeSoto Canyon region and off western Florida, although there have been some in the west-central portion of the northeastern Gulf. Based on the available data, it is possible that Bryde's whales could occur in the lease area.

<u>Dwarf and Pygmy Sperm Whales</u>. At sea, it is difficult to differentiate dwarf sperm whales (*Kogia sima*) from pygmy sperm whales (*Kogia breviceps*), and sightings are often grouped together as *Kogia* spp. Both species have a worldwide distribution in temperate to tropical waters. In the Gulf of Mexico, both species occur primarily along the continental shelf edge and in deeper waters off the continental shelf (Mullin et al., 1991, Mullin, 2007, Waring et al., 2016). Either species could occur in the lease area.

<u>Beaked Whales</u>. Four species of beaked whales are known to occur in the Gulf of Mexico: Blainville's beaked whale (*Mesoplodon densirostris*), Sowerby's beaked whale (*Mesoplodon bidens*), Gervais' beaked whale (*Mesoplodon europaeus*), and Cuvier's beaked whale (*Ziphius cavirostris*). Stranding records (Würsig et al., 2000) as well as passive acoustic monitoring in the Gulf of Mexico (Hildebrand et al., 2015) suggest that Gervais' beaked whale and Cuvier's beaked whale are the most common. Sowerby's beaked whale is considered extralimital, with only one documented stranding in the Gulf of Mexico (Bonde and O'Shea, 1989). Blainville's beaked whales are rare, with only four documented strandings in the northern Gulf of Mexico (Würsig et al., 2000).

Due to the difficulties of at-sea identification, beaked whales in the Gulf of Mexico are identified either as Cuvier's beaked whales or are grouped into an undifferentiated species complex (*Mesoplodon* spp.). In the northern Gulf of Mexico, they are broadly distributed in water depths greater than 3,281 ft (1,000 m) over lower slope and abyssal landscapes (Davis et al., 2000a). Any of these species could occur in the lease area (Waring et al., 2016).

<u>Delphinids</u>. Fourteen species of delphinids are known to occur in the Gulf of Mexico: Atlantic spotted dolphin (*Stenella frontalis*), Clymene dolphin (*Stenella clymene*), pantropical spotted dolphin (*Stenella attenuata*), spinner dolphin (*Stenella longirostris*), striped dolphin (*Stenella coeruleoalba*), bottlenose dolphin (*Tursiops truncatus*), false killer whale (*Pseudorca crassidens*), killer whale (*Orcinus orca*), pygmy killer whale (*Feresa attenuata*), melon-headed whale (*Peponocephala electra*), short-finned pilot whale (*Globicephala macrorhynchus*), Risso's

dolphin (*Grampus griseus*), Fraser's dolphin (*Lagenodelphis hosei*), and rough-toothed dolphin (*Steno bredanensis*). Any of these species could occur in the lease area (Waring et al., 2016). The most common non-endangered cetaceans in the deepwater environment of the northern Gulf of Mexico are the pantropical spotted dolphin, spinner dolphin, and rough toothed dolphin (Waring et al., 2016).

The bottlenose dolphin (*Tursiops truncatus*) is a common inhabitant of the northern Gulf of Mexico, particularly within continental shelf waters. There are two ecotypes of bottlenose dolphins, a coastal form and an offshore form, which are genetically isolated from each other (Waring et al., 2016). The offshore form of the bottlenose dolphin may occur within the lease area. Inshore populations of coastal bottlenose dolphins in the northern Gulf of Mexico are separated into 31 geographically distinct population units, or stocks, for management purposes by NMFS (Hayes et al., 2017).

IPFs that could affect non-endangered marine mammals include installation vessel presence, noise, and lights; support vessel and helicopter traffic; and two types of accidents (a small diesel fuel spill and a large oil spill). Effluent discharges are likely to have negligible impacts due to rapid dispersion, the small area of ocean affected, the intermittent nature of the discharges, and the mobility of these marine mammals. Compliance with NTL BSEE-2015-G03 (**Table 1**) will minimize the potential for marine debris-related impacts. The IPFs with potential impacts listed in **Table 2** are discussed below.

Impacts of Installation Vessel Presence, Noise, and Lights

The presence of the installation vessel presents an attraction for pelagic food sources that may also attract cetaceans. Some odontocetes have shown increased feeding activity around lighted platforms at night (Todd et al., 2009). Therefore, prey congregation could pose an attraction for protected species that exposes them to higher levels or longer durations of noise that might otherwise be avoided. While noise from installation vessels and support vessels is considered an IPF for marine mammals, vessel presence and lighting are not considered as IPFs for these species (BOEM, 2012a, 2015, 2016b).

Noise from well completion and infrastructure installation operations has the potential to disturb marine mammals. As discussed in **Section A.1**, noise impacts would be expected at greater distances when DP thrusters are in use than with vessel noise alone and are dependent on variables relating to sea state conditions, thruster type and usage. Three functional hearing groups are represented in the 21 non-endangered cetceans found in the Gulf of Mexico (NMFS, 2016). Eighteen of the 20 odonotocete species are considered to be in the mid-frequency functional hearing group, two species (*Kogia*) are in the high frequency functional hearing group, and one species (Bryde's whale) is in the low frequency functional hearing group (NMFS, 2016). Thruster noise will affect each group differently depending on the frequency bandwiths produced by operations.

For mid-frequency cetaceans exposed to a non-impulsive source, permanent threshold shifts are estimated to occur when the mammal has received a cumulative exposure level of 198 dB re $1\,\mu\text{Pa}^2\cdot\text{s}$ over a 24-hour period. Similarly, temporary threshold shifts are estimated to occur when a mammal has received a cumulative noise exposure level of 178 dB re $1\,\mu\text{Pa}^2\cdot\text{s}$ over a 24-hour period. For low frequency cetaceans, specifically the Bryde's whale, permanent and temporary threshold shift onset is estimated to occur at 199 dB re $1\,\mu\text{Pa}^2\cdot\text{s}$ and 179 dB re $1\,\mu\text{Pa}^2\cdot\text{s}$, repectively. Based on transmission loss calculations, open water propagation

of noise produced by typical sources with DP thrusters in use during offshore operations are not expected to produce received levels greater than 160 dB re 1 μ Pa beyond 25 m from the source. Due to the short propagation distance of high sound pressure levels, the transient nature of marine mammals, and the stationary nature of the proposed activites, it is not expected that any marine mammals will receive exposure levels necessary for the onset of auditory threshold shifts.

NOAA Fisheries West Coast Region (2018) presents criteria that are used in the interim to determine behavioral disturbance thresholds for marine mammals and are applied equally across all functional hearing groups. Received sound pressure levels of 120 dB re 1 μ Pa from a non-impulsive source are considered high enough to illicit a behaviorial reaction in some marine mammal species. The 120 dB isolpleth may extend tens to hundreds of kilometers from the source depending on the propagation environment. There are other OCS facilities and activities near the lease area, and the region as a whole has a large number of similar sources. Marine mammal species in the northern Gulf of Mexico have been exposed to noise from anthropogenic sources for a long period of time and over large geographic areas and likely do not represent a naïve population with regard to sound (National Research Council, 2003b). It is expected that this project would represent a small, temporary contribution to the overall noise regime, and any short-term behaviorial impacts are not expected to be biologically significant to marine mammal populations.

Impacts of Support Vessel and Helicopter Traffic

Support vessel traffic has the potential to disturb marine mammals, and there is a risk of vessel strikes. Data concerning the frequency of vessel strikes are presented by BSEE (2016). Pursuaint to NTL BOEM-2016-G01, vessel operators and crews will attempt to maintain a distance of 300 ft (91 m) or greater when whales are sighted and 150 ft (45 m) when small (non-whale) cetaceans are sighted. When cetaceans are sighted while a vessel is underway, vessels must attempt to remain parallel to the animal's course and avoid excessive speed or abrupt changes in direction until the cetacean has left the area. These mitigation measures are only effective during daylight hours, or in sea and weather conditions where cetaceans are sighted. Compliance with NTL BOEM-2016-G01 (see **Table 1**) will minimize the likelihood of vessel strikes as well as reduce the chance for disturbing marine mammals during these periods. If collisions occur during periods of poor visibility or at night, it is likely that it may result in the death of the cetacean. However, impacts to non-listed cetaceans are not significant at the population (stock) level.

Aircraft traffic also has the potential to disturb marine mammals (Würsig et al., 1998). However, while flying offshore, helicopters maintain altitudes above 700 ft (213 m) during transit to and from the working area. In addition, guidelines and regulations issued by NMFS under the authority of the MMPA specify that helicopters maintain an altitude of 1,000 ft (305 m) within 300 ft (91 m) of marine mammals. Maintaining this altitude will minimize the potential for disturbing marine mammals, and no significant impacts are expected (BOEM, 2017a).

Impacts of a Small Diesel Fuel Spill

Potential spill impacts on marine mammals are discussed by BOEM (2017a, b). Oil impacts on marine mammals, in general, are discussed by Geraci and St. Aubin (1990). For this DOCD, there are no unique site-specific issues with respect to spill impacts on these animals.

Section A.9.1 discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures. Given the open ocean location of the lease area, the limited duration of a small spill and response efforts, it is expected that any impacts on marine mammals would be brief and minimal.

Direct physical and physiological effects of exposure to diesel fuel could include skin irritation, inflammation, or necrosis; chemical burns of skin, eyes, and mucous membranes; inhalation of toxic fumes; ingestion of oil directly or via contaminated prey; and stress from the activities and noise of response vessels and aircraft (MMC, 2011). The extent and persistence of impacts would depend on the meteorological and oceanographic conditions at the time and the effectiveness of spill response measures. As **Section A.9.1** discusses, a small diesel fuel spill would not be expected to make landfall or reach coastal waters. Therefore, due to the limited areal extent and short duration of water quality impacts from a small diesel fuel spill as well as the mobility of marine mammals, no significant impacts are expected.

Impacts of a Large Oil Spill

Potential spill impacts on marine mammals are discussed by BOEM (2017a, b). For this DOCD, there are no unique site-specific issues.

Impacts of oil spills on marine mammals can include direct impacts from oil exposure as well as indirect impacts due to response activities and materials (e.g., vessel traffic, noise, dispersants) (MMC, 2011, Takeshita et al., 2017). Direct physical and physiological effects can include skin irritation, inflammation, or necrosis; chemical burns of skin, eyes, and mucous membranes; inhalation of toxic fumes; ingestion of oil (and dispersants) directly or via contaminated prey. Complications of the above may lead to dysfunction of immune (DeGuise et al., 2017) and reproductive systems (Kellar et al., 2017), physiological stress, declining physical condition, and death (MMC, 2011). Indirect impacts can include stress from the activities and noise of response vessels and aircraft. Behavioral responses can include displacement of animals from prime habitat (McDonald et al., 2017), disruption of social structure, change in prey availability and foraging distribution or patterns, change in reproductive behavior/productivity, and change in movement patterns or migration (MMC, 2011).

Data from the Macondo spill, as analyzed and summarized by NOAA (2016b), indicate the scope of potential impacts from a large spill. Tens of thousands of marine mammals were exposed to oil, where they likely inhaled, aspirated, ingested, physically contacted, and absorbed oil components (NOAA, 2016b). Nearly all of the marine mammal stocks in the northern Gulf of Mexico were affected. The oil's physical, chemical, and toxic effects damaged tissues and organs, leading to a constellation of adverse health effects, including reproductive failure, adrenal disease, lung disease, and poor body condition (NOAA, 2016b). According to the National Wildlife Federation (2016a), nearly all of the 21 species of dolphins and whales that live in the northern Gulf of Mexico had demonstrable, quantifiable injuries. NMFS (2014a) documented 13 dolphins and whales stranded alive, and over 150 dolphins and whales were found dead during the oil spill response. Other affected species included dwarf and pygmy sperm whales, melon-headed whales, and spinner dolphins. Because of known low detection rates of carcasses (Williams et al., 2011), it is possible that the number of marine mammal deaths was significantly underestimated. Also, necropsies to confirm the cause of death could not be conducted for many of these marine mammals. Schwacke et al. (2014) reported that one year after the spill, many dolphins in Barataria Bay, Louisiana, had evidence of disease

conditions associated with petroleum exposure and toxicity, including a decline in pregnancy success rate (Lane et al., 2015).

In the aftermath of the Macondo spill, an "unusual mortality event" (UME) of unprecedented size affected marine mammal stock areas in the Gulf of Mexico. The UME began in April 2010 and ended in July 2014 (NOAA, 2016c). Carmichael et al. (2012) hypothesized that the unusual number of bottlenose dolphin strandings in the northern Gulf of Mexico in 2010 and 2011 may have been associated with environmental perturbations including sustained cold weather and the Macondo spill in 2010 as well as large volumes of cold freshwater discharge in the early months of 2011. Venn-Watson et al. (2015) performed histological studies to examine contributing factors and causes of deaths for stranded common bottlenose dolphins from Louisiana, Mississippi, and Alabama and found that the dead dolphins from the UME were more likely than those from other areas to have primary bacterial pneumonia and thin adrenal cortices. The adrenal gland and lung diseases were consistent with exposure to petroleum compounds, and the exposure to petroleum compounds during and after the Macondo spill were proposed as a cause. Therefore, if a large spill occurred, similar impacts to marine mammals could be expected.

In the event of a large spill, response activities that may impact marine mammals include increased vessel traffic, use of dispersants, and remediation activities (e.g., controlled burns, skimmers, booms) (BOEM, 2017a, b). The increased level of vessel and aircraft activity associated with spill response could disturb marine mammals, potentially resulting in behavioral changes. The large number of response vessels could result in vessel strikes, entanglement, injury, or stress. Response vessels would operate in accordance with NTL BOEM-2016-G01 to reduce the potential for striking or disturbing these animals, and therefore no significant impacts are expected. The application of dispersants is likely to reduce the chance of harmful impacts as the dispersants would remove oil from the surface, thereby reducing the risk of contact and rendering it less likely to adhere to skin, baleen plates, or other body surfaces (BOEM, 2017a). The use of trained observers during remediation activities will reduce the likelihood of capture and/or entrainment (BOEM, 2017a, b) of marine mammals. It is expected that impacts to non-listed marine mammals from oil spill response activities resulting in the death of individuals would be adverse but not significant at a population level.

C.3.4 Sea Turtles (Endangered/Threatened)

Five species of endangered or threatened sea turtles may be found near the lease area. Endangered species include the leatherback (*Dermochelys coriacea*), Kemp's ridley (*Lepidochelys kempii*), and hawksbill (*Eretmochelys imbricata*) turtles, while the North Atlantic DPS of the green turtle (*Chelonia mydas*) is listed as threatened (81 *FR* 20057). The DPS of loggerhead turtles (*Caretta caretta*) that occurs in the Gulf of Mexico is listed as threatened, although other DPSs are endangered.

Critical habitat has been designated for the loggerhead turtle in the Gulf of Mexico as shown in **Figure 3**. Critical habitat in the northern Gulf of Mexico includes nesting beaches in Mississippi, Alabama, and the Florida Panhandle; nearshore reproductive habitat within 1 mile (1.6 km) seaward from these beaches; and a large area of *Sargassum* habitat that includes most of the Western and Central Planning Areas of and parts of the southern portion of the Eastern Planning Area (NMFS, 2014b).

Loggerhead turtles in the Gulf of Mexico are part of the Northwest Atlantic Ocean DPS (76 FR 58868). In July 2014, NMFS and the USFWS designated critical habitat for this DPS. The

USFWS designation (79 FR 39756) includes nesting beaches in Jackson County, Mississippi; Baldwin County, Alabama; and Bay, Gulf, and Franklin Counties in the Florida Panhandle as well as several counties in southwest Florida and the Florida Keys (and other areas along the Atlantic coast). The NMFS designation (79 FR 39856) includes nearshore reproductive habitat within 1 mile (1.6 km) seaward of the mean high water line along these same nesting beaches. NMFS also designated a large area of shelf and oceanic waters, termed Sargassum habitat, in the Gulf of Mexico (and Atlantic Ocean) as critical habitat. Sargassum is a brown alga (Class Phaeophyceae) that takes on a planktonic, often pelagic existence. Rafts of Sargassum serve as important foraging and developmental habitat for numerous fishes, and young sea turtles, including loggerhead turtles. NMFS designated three other categories of critical habitat as well; of these, two (migratory habitat and overwintering habitat) are along the Atlantic coast and the third (breeding habitat) is found in the Florida Keys and along the Florida east coast (NMFS, 2014b). The closest designated nearshore reproductive critical habitat for loggerhead sea turtles is approximately 91 miles (146 km) from the lease area. The lease area is located 41 miles (66 km) northeast of the designated Sargassum critical habitat for loggerhead sea turtles (Figure 3).

Leatherback and loggerhead turtles are the most likely species to be present near the lease area as adults. Green, hawksbill, and Kemp's ridley turtles are typically inner shelf and nearshore species, unlikely to occur near the lease area as adults. Hatchlings or juveniles of any of the sea turtle species may be present in deepwater areas, including the lease area, where they may be associated with *Sargassum* and other flotsam.

All five sea turtle species in the Gulf of Mexico are migratory and use different marine habitats according to their life stage. These habitats include high-energy beaches for nesting females and emerging hatchlings, and pelagic convergence zones for hatchling and juvenile turtles. As adults, green, hawksbill, and loggerhead turtles forage primarily in shallow, benthic habitats. Leatherback turtles are the most pelagic of the sea turtles, feeding primarily on jellyfish.

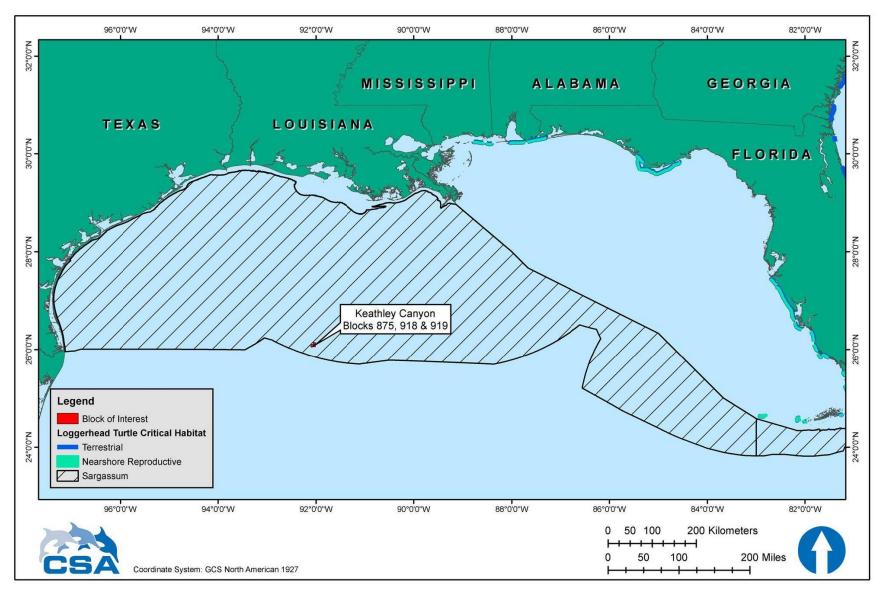


Figure 3. Location of loggerhead turtle designated critical habitat in relation to the lease area.

Sea turtle nesting on the northern Gulf of Mexico coast can be summarized by species as follows:

- Loggerhead turtles Nest in significant numbers along the Florida Panhandle (Florida Fish and Wildlife Conservation Commission, 2017a) and, to a lesser extent, from Texas through Alabama (NMFS and USFWS, 2008);
- Green and leatherback turtles Infrequently nest on Florida Panhandle beaches (Florida Fish and Wildlife Conservation Commission, 2017b, c);
- Remp's ridley turtles The main nesting site is on a 16 mile (26 km) stretch of coastline near Rancho Nuevo in the Mexican state of Tamaulipas (NMFS et al., 2011). A much smaller, but growing, population nests in Padre Island National Seashore, Texas, mostly as a result of reintroduction efforts (NMFS et al., 2011). A total of 353 Kemp's ridley turtle nests were counted on Texas beaches in 2017, an increase from the 185 counted in 2016, 159 counted in 2015, and 118 counted in 2014 (Turtle Island Restoration Network, 2017). Padre Island National Seashore along the coast of Willacy, Kenedy, and Kleberg Counties in southern Texas, is the most important nesting location for this species in the United States, although there have been occasional reports of Kemp's ridleys nesting in Alabama (Share the Beach, 2016); and
- Hawksbill turtles Typically do not nest anywhere near the project area, with most nesting in the region located in the Caribbean Sea and on the beaches of the Yucatán Peninsula (USFWS, 2016a).

IPFs that could affect sea turtles include installation vessel presence, noise, and lights; support vessel and helicopter traffic; and two types of accidents (a small diesel fuel spill and a large oil spill). Effluent discharges are likely to have negligible impacts on sea turtles due to rapid dispersion, the small area of ocean affected, and the intermittent nature of the discharges. Compliance with NTL BSEE-2015-G03 (**Table 1**) will minimize the potential for marine debris-related impacts on sea turtles. The IPFs with potential impacts listed in **Table 2** are discussed below.

Impacts of Installation Vessel Presence, Noise, and Lights

Offshore well completion and infrastructure installation activities produce a broad array of sounds at frequencies and intensities that may be detected by sea turtles (Samuel et al., 2005, Popper et al., 2014). Sea turtles hear low frequency sounds, mainly below 1,200 Hz (Bartol and Ketten, 2006, Bartol, 2014). Potential impacts may include behavioral disruption and temporary or permanent displacement from the area near the sound source. The currently accepted response estimates are derived from fish hearing data rather than from marine mammal hearing data due to the limited experimental data available (Popper et al., 2014). A NMFS Biological Opinion (NMFS, 2015) lists sea turtle underwater acoustic injury and behavioral thresholds at 207 dB re 1 μ Pa and 166 dB re 1 μ Pa, respectively. No distinction is made between impulsive and continuous sources for these thresholds. Based on transmission loss calculations, open water propagation of noise produced by typical sources with DP thrusters are not expected to produce received levels greater than 160 dB re 1 μ Pa beyond 82 ft (25 m) from the source. Certain sea turtles, especially loggerheads, may be attracted to offshore structures (Lohoefener et al., 1990, Gitschlag et al., 1997) and, thus, may be more susceptible to impacts from sounds produced during routine operations. The most likely impacts would be short-term behavioral

changes such as diving and evasive swimming, disruption of activities, or departure from the area. Due to the small impact area around the wellsites, limited number of sources, and short duration of activities, these short-term impacts are not expected to be biologically significant to sea turtle populations.

Artificial lighting can disrupt the nocturnal orientation of sea turtle hatchlings (Witherington, 1997, Tuxbury and Salmon, 2005). However, hatchlings may rely less on light cues when they are offshore than when they are emerging on the beach (Salmon and Wyneken, 1990). NMFS (2007) concluded that the effects of lighting from offshore structures on sea turtles are insignificant.

Impacts of Support Vessel and Helicopter Traffic

Noise generated from support vessel traffic has the potential to disturb sea turtles, and there is a risk of vessel strikes. Data show that vessel strikes are one cause of sea turtle mortality in the Gulf of Mexico (Lutcavage et al., 1997). While adult sea turtles are visible at the surface during the day and in clear weather, they can be difficult to spot from a moving vessel when resting below the water surface, during nighttime, or during periods of inclement weather. To reduce the potential for vessel strikes vessel operators follow NTL BOEM-2016-G01, which recommends protected species identification training and that vessel operators and crews maintain a vigilant watch for sea turtles and slow down or stop their vessel to avoid striking protected species. When sea turtles are sighted, vessel operators and crews are required to attempt to maintain a distance of 150 ft (45 m) or greater whenever possible. Compliance with this NTL (**Table 1**) will minimize the likelihood of vessel strikes during periods of daylight and during sea and weather conditions that permit sighting of turtles on the sea surface. If a project-related vessel strikes a sea turtle, it is likely that it will result in the death of the individual turtle. Lethal ship strike to these listed species is not likely but, if it occurs, is significant to the population (NMFS, 2007).

Noise generated from support helicopter traffic also has the potential to disturb sea turtles. However, while flying offshore, helicopters maintain altitudes above 700 ft (213 m) during transit to and from the working area. This altitude will minimize the potential for disturbing sea turtles, and no significant impacts are expected (NMFS, 2007, BOEM, 2012a).

Impacts of a Small Diesel Fuel Spill

Potential spill impacts on sea turtles are discussed by NMFS (2007) and BOEM (2017a, b). For this DOCD, there are no unique site-specific issues with respect to spill impacts on sea turtles. **Section A.9.1** discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures. Given the open ocean location of the lease area, the duration of a small spill and opportunity for impacts on turtles to occur would be brief.

Direct physical and physiological effects of exposure to diesel fuel could include skin irritation, inflammation, or necrosis; chemical burns of skin, eyes, and mucous membranes; inhalation of toxic fumes; ingestion of oil directly or via contaminated prey; and stress from the activities and noise of response vessels and aircraft (NMFS, 2014a). As discussed in **Section A.9.1**, more than 90% of a small diesel spill in offshore waters would evaporate or disperse naturally within 24 hours. Therefore, due to the limited areal extent and short duration of water quality impacts from a small diesel fuel spill, no significant impacts to sea turtles from direct or indirect exposure are expected.

<u>Loggerhead Critical Habitat – Nesting Beaches</u>. A small diesel fuel spill in the lease area would be unlikely to affect sea turtle nesting beaches due to the distance from the nearest shoreline. Loggerhead turtle nesting beaches and nearshore reproductive habitat designated as critical habitat are located in Mississippi, Alabama, and the Florida Panhandle, at least 343 miles (552 km) from the lease area. As explained in **Section A.9.1**, a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion.

<u>Loggerhead Critical Habitat – Sarqassum.</u> The lease area located within the <u>Sargassum</u> habitat portion of the loggerhead turtle critical habitat (**Figure 3**). A small fuel spill could affect <u>Sargassum</u> and juvenile turtles by contaminating this habitat. If this habitat were contaminated, juvenile sea turtles could come into contact with or ingest oil, resulting in death, injury, or other sublethal effects. Effects of a small spill on <u>Sargassum</u> critical habitat for loggerhead turtles would be limited to the small area (0.5 to 5 ha [1.2 to 12 ac]) likely to be impacted by a small spill. An impact area of 5 ha (12 ac) would represent a negligible portion of the approximately 40,662,810 ha (100,480,000 ac) designated <u>Sargassum</u> critical habitat for loggerhead turtles in the northern Gulf of Mexico.

Impacts of a Large Oil Spill

Impacts of oil spills on sea turtles can include direct impacts from oil exposure as well as indirect impacts due to response activities and materials (e.g., vessel traffic, noise, dispersants). Direct physical and physiological effects can include skin irritation, inflammation, or necrosis; chemical burns of skin, eyes, and mucous membranes; inhalation of toxic fumes and smoke (e.g., from *in situ* burning of oil); ingestion of oil (and dispersants) directly or via contaminated food; and stress from the activities and noise of response vessels and aircraft. Complications of the above may lead to dysfunction of immune and reproductive systems, physiological stress, declining physical condition, and death. Behavioral responses can include displacement of animals from prime habitat, disruption of social structure, change in food availability and foraging distribution or patterns, change in reproductive behavior/productivity, and change in movement patterns or migration (NOAA, 2010, NMFS, 2014a). In the unlikely event of a spill, implementation of Anadarko's OSRP is expected to minimize the potential for these types of impacts on sea turtles. DOCD Section I provides detail on spill response measures.

Studies of oil effects on loggerhead turtles in a controlled setting (NOAA, 2010, Lutcavage et al., 1995) suggest that sea turtles show no avoidance behavior when they encounter an oil slick, and any sea turtle in an affected area would be expected to be exposed. Sea turtles' diving behaviors also put them at risk. Sea turtles rapidly inhale a large volume of air before diving and continually resurface over time, which may result in repeated exposure to volatile vapors and oiling (NMFS, 2007).

Results of the Macondo spill provide an indication of potential effects of a large oil spill on sea turtles. NOAA (2016b) estimates that between 4,900 and up to 7,600 large juvenile and adult sea turtles (Kemp's ridleys, loggerheads, and hardshelled sea turtles not identified to species), and between 56,000 and 166,000 small juvenile sea turtles (Kemp's ridleys, green turtles, loggerheads, hawksbills, and hardshelled sea turtles not identified to species) were killed by the Macondo spill. Impacts from a large oil spill resulting in similar numbers of sea turtle deaths would be significant losses to local populations.

Spill response activities could also kill sea turtles and interfere with nesting. NOAA (2016b) concluded that after the Macondo spill hundreds of sea turtles were likely killed by response activities such as increased boat traffic, dredging for berm construction, increased lighting at night near nesting beaches, and oil cleanup operations on nesting beaches. Nearly 35,000 hatchling sea turtles (loggerheads, Kemp's ridleys, and green turtles) were also injured by response activities (NOAA, 2016b). In addition, it is estimated that oil cleanup operations on Florida Panhandle beaches following the spill deterred adult female loggerheads from coming ashore and laying their eggs, resulting in a decrease of approximately 250 loggerhead nests in 2010 (NOAA, 2016b). Impacts from oil spill response activities resulting in the death of individual listed sea turtles would be significant to local populations.

<u>Loggerhead Critical Habitat – Nesting Beaches</u>. If spilled oil reaches sea turtle nesting beaches, nesting sea turtles and egg development could be affected (NMFS, 2007). An oiled beach could affect nest site selection or result in no nesting at all (e.g., false crawls). Upon hatching and successfully reaching the water, hatchlings are subject to the same types of oil spill exposure hazards as adults. Hatchlings that contact oil residues while crossing a beach can exhibit a range of effects, from acute toxicity to impaired movement and abnormal bodily functions (NMFS, 2007).

Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability; **Table 3**). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida. The nearest nearshore reproductive critical habitat for the loggerhead turtle is located in Baldwin County Alabama, approximately 343 miles (552 km) from the lease area (**Figure 3**) and is predicted by the 60-day OSRA model to have <0.5% conditional probability of contact within 60 days of a spill.

Loggerhead Critical Habitat – Sargassum. The lease area is located within the loggerhead turtle critical habitat designated as Sargassum habitat, which includes most of the Western and Central Planning Areas in the Gulf of Mexico and parts of the southern portion of the Eastern Planning Area (Figure 3) (NMFS, 2014b). Because of the large area covered by the designated Sargassum habitat for loggerhead turtles, a large spill could result in a substantial part of the Sargassum habitat in the northern Gulf of Mexico being oiled. The catastrophic 2010 Macondo spill affected approximately one-third of the Sargassum habitat in the northern Gulf of Mexico (BOEM, 2014a). Therefore, it is extremely unlikely that the entire Sargassum critical habitat would be affected by a large spill. Because Sargassum is a floating, pelagic species, it would only be affected by impacts that occur near the surface.

The effects of oiling on Sargassum vary with spill severity, but moderate to heavy oiling could occur during a large spill and could cause complete mortality to Sargassum and its associated communities (BOEM, 2017a). Sargassum also has the potential to sink during a large spill, thus temporarily removing the habitat and possibly being an additional pathway of oil exposure to the benthic environment (Powers et al., 2013). Lower levels of oiling may cause sublethal affects, including a reduction in growth, productivity, and recruitment of organisms associated with Sargassum. The Sargassum algae itself could be less impacted by light to moderate oiling than associated organisms because of a waxy outer layer that might help protect it from oiling (BOEM, 2016b). Sargassum has a yearly seasonal cycle of growth and a yearly cycle of migration from the Gulf of Mexico to the western Atlantic. A large spill could affect a large portion of the

annual crop of the algae; however, because of its ubiquitous distribution and seasonal cycle, recovery of the *Sargassum* community would be expected to occur within a short time period (BOEM, 2017a).

In the event of a large spill, the level of vessel and aircraft activity associated with spill response could disturb sea turtles and potentially result in vessel strikes, entanglement, or other injury or stress. Response vessels would operate in accordance with NTL BOEM-2016-G01 (**Table 1**) to reduce the potential for striking or disturbing these animals; however, events leading to the death of individual sea turtles from spill response activities are expected to be significant to local populations.

C.3.5 Piping Plover (Threatened)

The Piping Plover (*Charadrius melodus*) is a migratory shorebird that overwinters along the southeastern U.S. and Gulf of Mexico coasts. This threatened species is in decline as a result of hunting, habitat loss and modification, predation, and disease (USFWS, 2003). Critical overwintering habitat has been designated, including beaches in Texas, Louisiana, Mississippi, Alabama, and Florida (**Figure 4**). Piping Plovers inhabit coastal sandy beaches and mudflats, feeding by probing for invertebrates at or just below the surface. They use beaches adjacent to foraging areas for roosting and preening (USFWS, nd).

The only IPF potentially affecting Piping Plovers is a large oil spill. It is assumed that helicopters will maintain an altitude of 1,000 ft (305 m) over unpopulated areas or across coastlines and are therefore not likely impact overwintering Piping Plovers.

A small diesel fuel spill in the lease area would be unlikely to affect Piping Plovers because a diesel fuel would not be expected to make landfall or reach coastal waters prior to natural dispersion (Section A.9.1).

Impacts of a Large Oil Spill

The lease area is approximately 210 miles (338 km) from the nearest shoreline that is designated as critical habitat for Piping Plovers in Terrebonne Parish, Louisiana (Figure 4). The 30-day OSRA modeling (Table 3) predicts that Piping Plover critical habitat in Texas or Louisiana has a <2% chance of contact within 30 days of a spill. The 60-day OSRA modeling (Table 4) predicts a 13% or less probability of shoreline contact within 60 days of a spill between Cameron Parish, Louisiana, and Miami-Dade County Florida, a stretch of shoreline that includes numerous areas of Piping Plover Critical habitat. Piping Plovers could become physically oiled while foraging on oiled shores or secondarily contaminated through ingestion of oiled intertidal sediments and prey (BOEM, 2017a). Piping Plovers congregate and feed along tidally exposed banks and shorelines, following the tide out to allow foraging at the water's edge. It is possible that some deaths of Piping Plovers could occur, especially if spills occur during winter months when plovers are most common along the coastal Gulf or if spills contacted critical habitat. Impacts also could occur from vehicular traffic on beaches and other activities associated with spill cleanup.

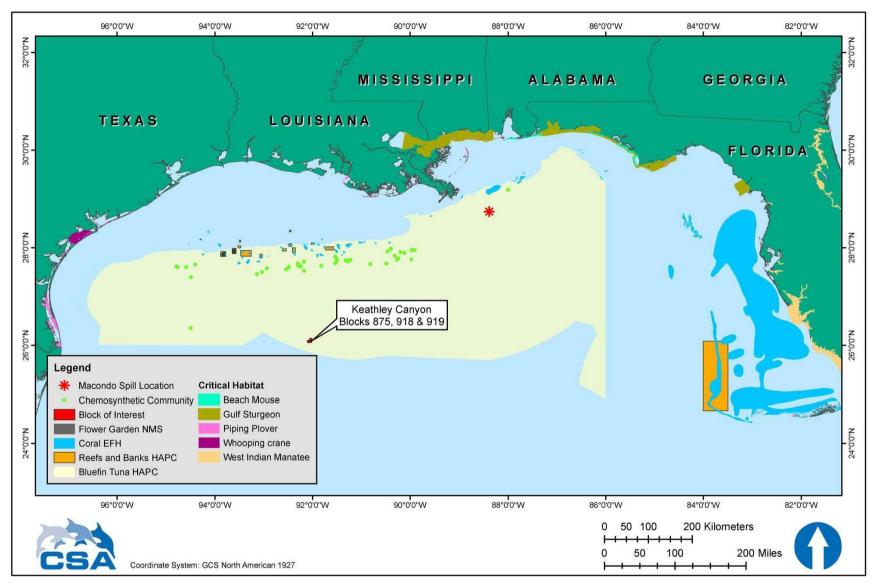


Figure 4. Location of selected environmental features in relation to the lease area. EFH = Essential Fish Habitat; HAPC = Habitat Area of Particular Concern; NMS= National Marine Sanctuary.

However, a large spill that contacts shorelines would not necessarily impact Piping Plovers. In the aftermath of the Macondo spill, Gibson et al. (2017) completed thorough surveys of coastal Piping Plover habitat in coastal Lousiana, Mississippi, and Alabama and found that only 0.89% of all observed Piping Plovers were visibly oiled, leaving the authors to conclude that the Macondo spill did not substantially affect Piping Plover populations.

Anadarko has extensive resources available to protect and rehabilitate wildlife in the event of a spill reaching the shoreline, as detailed in their Regional OSRP. Impacts resulting in the deaths of individual Piping Plovers could be significant to the local population, depending on the number of individuals lost.

C.3.6 Whooping Crane (Endangered)

The Whooping Crane (*Grus americana*) is a large omnivorous wading bird listed as an endangered species. Three wild populations live in North America (National Wildlife Federation, 2016b). One population winters along the Texas coast at Aransas NWR and summers at Wood Buffalo National Park in Canada. This population represents the majority of the world's population of free-ranging Whooping Cranes, reaching a record estimated population of 431 during the 2016 to 2017 winter (USFWS, 2017). A non-migratory population was reintroduced in central Florida, and another reintroduced population summers in Wisconsin and migrates to the southeastern U.S. for the winter. Whooping Cranes breed, migrate, winter, and forage in a variety of habitats, including coastal marshes and estuaries, inland marshes, lakes, ponds, wet meadows and rivers, and agricultural fields (USFWS, 2007). Approximately 9,000 ha (22,240 ac) of salt flats on Aransas NWR and adjacent islands make up the principal wintering grounds of the Whooping Crane (**Figure 4**). Aransas NWR is designated as critical habitat for the species and a species description is presented by BOEM (2012a).

A large oil spill is the only IPF potentially affecting Whooping Cranes. A small diesel fuel spill in the lease area would be unlikely to affect Whooping Cranes due to the distance from Aransas NWR. As explained in **Section A.9.1**, a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion.

Impacts of a Large Oil Spill

The lease area is 309 miles (497 km) from the Aransas NWR in Aransas and Calhoun Counties, Texas, the nearest shoreline that is designed as critical habitat for Whooping Cranes. The 30-day OSRA model predicts a 1% chance of shoreline contact in Aransas and Calhoun Counties within 30 days of a spill. The 60-day OSRA model predicts a 4% chance of shoreline contact in Aransas or Calhoun counties within 60 days of a spill. Whooping Cranes could physically oil themselves while foraging in oiled areas or secondarily contaminate themselves through ingestion of contaminated shellfish, frogs, and fishes. It is possible that some deaths of Whooping Cranes could occur, especially if spills occur during winter months when Whooping Cranes are most common along the Texas coast or if the spill contacts their critical habitat in Aransas NWR. Impacts could also occur from vehicular traffic on beaches and other activities associated with spill cleanup. Anadarko has extensive resources available to protect and rehabilitate wildlife in the event of a spill reaching the shoreline, as detailed in their OSRP. Impacts leading to the death of individual Whooping Cranes would be significant at a species level.

C.3.7 Oceanic Whitetip Shark (Threatened)

The oceanic whitetip shark (*Carcharhinus longimanus*) was listed as threatened under the ESA on 30 January 2018 (effective 30 March 2018) by NMFS (83 *FR* 4153). Oceanic whitetip sharks are found worldwide in offshore waters between approximately 30° N and 35° S latitude, and have generally been described as one of the most abundant species of oceanic sharks (Compagno, 1984). However, the population trend appears to be decreasing as the species is now only occasionally reported in the Gulf of Mexico (Baum et al., 2015).

A comparison of historical shark catch rates in the Gulf of Mexico by Baum and Myers (2004) noted that most recent papers dismissed the oceanic whitetip shark as rare or absent in the Gulf of Mexico. NMFS (2018) noted that there has been an 88% decline in abundance of the species in the Gulf of Mexico since the mid-1990s due to commercial fishing pressure.

IPFs that could affect the oceanic whitetip shark include installation vessel presence, noise, and lights, and a large oil spill. Impacts from effluent discharges are not expected due to rapid dilution of effluents and adherence to NPDES permit limits and requirements. A small diesel fuel spill in the lease area would be unlikely to affect oceanic whitetip sharks due to rapid natural disperson of diesel fuel and the low density of oceanic whitetip sharks potentially present in the lease area.

Impacts of Installation Vessel Presence, Noise, and Lights

Offshore well completion and infrastructure installation activities produce a broad array of sounds at frequencies and intensities that may be detected by sharks including the threatened oceanic whiteip shark. Shark hearing abilities have the highest sensitivity to low frequency sounds between approximately 40 and 800 Hz (Myrberg Jr., 2000). Sharks are most attracted to sounds in broadband frequencies below 80 Hz (Myrberg Jr., 2000). Installation vessel noise could also influence prey behaviors such as predator avoidance, foraging, reproduction, and intraspecific interactions (Picciulin et al., 2010, Bruintjes and Radford, 2013, McLaughlin and Kunc, 2015). However, because of the limited propagation distances of high sound pressure levels from the installation vessels, impacts would be limited in geographic scope and no population level impacts on oceanic whitetip sharks are expected.

Impacts of a Large Oil Spill

Information regarding the direct affects of oil on elasmobranchs, including the oceanic whitetip shark are largely unknown. However, in the event of a large oil spill, oceanic whitetip sharks could be affected by direct ingestion, ingestion of oiled prey, or the absorption of dissolved petroleum products through the gills. Because oceanic whitetip sharks may be found in surface waters, they could be more likely to be impacted by floating oil than other species which only reside at depth.

It is possible that a large oil spill could affect individual oceanic whitetip sharks and result in injuries or deaths. However, due to the low density of oceanic whitetip sharks thought to exist in the Gulf of Mexico, it is unlikely that a large spill would result in population level effects.

C.3.8 Gulf Sturgeon (Threatened)

The Gulf sturgeon (*Acipenser oxyrinchus desotoi*) is a threatened fish species that inhabits the major rivers and inner shelf waters from the Mississippi River to the Suwannee River, Florida

(Barkuloo, 1988, Wakeford, 2001). The Gulf sturgeon is anadromous and migrates from the sea upstream into coastal rivers to spawn in freshwater. The historic range of the species extended from the Mississippi River to Charlotte Harbor, Florida (Wakeford, 2001) but has contracted over time to encompass major rivers and inner shelf waters from the Mississippi River to the Suwannee River, Florida. Populations have been depleted or even extirpated throughout much of their historical range by fishing, shoreline development, dam construction, water quality changes, and other factors (Barkuloo, 1988, Wakeford, 2001). These declines prompted the listing of the Gulf sturgeon as a threatened species in 1991. The best-known populations occur in the Apalachicola and Suwannee Rivers in Florida (Carr, 1996, Sulak and Clugston, 1998), the Choctawhatchee River in Alabama (Fox et al., 2000), and the Pearl River in Mississippi/Louisiana (Morrow et al., 1998). Rudd et al. (2014) reconfirmed the spatial distribution and movement patterns of Gulf Sturgeon by surgically implanting acoustic telemetry tags. Critical habitat in the Gulf extends from Lake Borgne, Louisiana (St. Bernard Parish), to Suwannee Sound, Florida (Levy County) (NMFS, 2014c) (Figure 4). A species description is presented by BOEM (2012a) and in the recovery plan for this species (USFWS, 1995).

A large oil spill is the only IPF that could affect Gulf sturgeon. There are no IPFs associated with routine project activities that could affect these fish. A small diesel fuel spill in the lease area would be unlikely to affect Gulf sturgeon because a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion (see explanation in **Section A.9.1**).

Impacts of a Large Oil Spill

Potential spill impacts on Gulf sturgeon are discussed by NMFS (2007) and BOEM (2012a). For this DOCD, there are no unique site-specific issues with respect to this species.

The lease area is approximately 330 miles (531 km) from the nearest Gulf sturgeon critical habitat in Harrison County, Mississippi. The 30-day OSRA model (**Table 3**) predicts that a spill in the lease area has a <0.5% conditional probability of contacting any coastal area containing Gulf sturgeon critical habitat within 30 days of a spill. The 60-day OSRA model (**Table 4**) predicts that a spill in the lease area has 1% or less conditional probability of contacting any coastal areas containing Gulf sturgeon critical habitat within 60 days of a spill.

In the event of oil reaching Gulf sturgeon habitat, the fish could be affected by direct ingestion, ingestion of oiled prey, or the absorption of dissolved petroleum products through the gills. Based on the life history of this species, sub-adult and adult Gulf sturgeon would be most vulnerable to an estuarine or marine oil spill, and likely would be vulnerable only from 1 September through 30 April when the species is typically foraging in estuarine and shallow marine habitats (NMFS, 2007).

NOAA (2016b) estimated that 1,100 to 3,600 Gulf sturgeon were exposed to oil from the Macondo spill. Overall, 63% of the Gulf sturgeon from six river populations were potentially exposed to the spill. Although the number of dead or injured Gulf sturgeon was not estimated, laboratory and field tests indicated that Gulf sturgeon exposed to oil displayed both genotoxicity and immunosuppression, which can lead to malignancies, cell death, susceptibility to disease, infections, and a decreased ability to heal (NOAA, 2016b). Impacts resulting in the deaths of Gulf sturgeons may be significant to local populations, depending on the number of individuals lost.

C.3.9 Beach Mice (Endangered)

Four subspecies of endangered beach mice (*Peromyscus polionotus*) occur on the barrier islands of Alabama and the Florida Panhandle: Alabama, Choctawhatchee, Perdido Key, and St. Andrew beach mice. Critical habitat has been designated for all four subspecies. **Figure 4** shows the combined critical habitat for all four subspecies. Species descriptions are provided by BOEM (2012a).

A large oil spill is the only IPF that could affect beach mice. There are no IPFs associated with routine project activities that could affect these animals due to the distance from shore and the lack of any onshore support activities near their habitat. A small diesel fuel spill in the lease area would not affect beach mice because a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion (Section A.9.1).

Impacts of a Large Oil Spill

Potential spill impacts on beach mice are discussed by BOEM (2017a). For this DOCD, there are no unique site-specific issues with respect to these species that were not analyzed in these documents.

Beach mouse critical habitat in Baldwin County, Alabama, is approximately 371 miles (597 km) from the lease area. The 30-day OSRA results (**Table 3**) predicts <0.5% conditional probability of oil contact with beach mouse critical habitat within 30 days of a spill. The 60-day OSRA modeling (**Table 4**) predicts that a spill in the lease area has a 1% or less conditional probability of reaching either the Alabama or Florida shorelines inhabited by beach mice within 60 days of a spill.

In the event of oil contacting these beaches, beach mice could experience several types of direct and indirect impacts. Contact with spilled oil could cause skin and eye irritation and subsequent infection; matting of fur; irritation of sweat glands, ear tissues, and throat tissues; disruption of sight and hearing; asphyxiation from inhalation of fumes; and toxicity from ingestion of oil and contaminated food. Indirect impacts could include reduction of food supply, destruction of habitat, and fouling of nests. Impacts could also occur from vehicular traffic and other activities associated with spill cleanup (BOEM, 2017a, b). However, any such impacts are unlikely due to the distance from shore and response actions that would occur in the event of a spill. Impacts leading to the death of individual beach mice could be significant at a species level.

C.3.10 Threatened Coral Species

Four threatened coral species are known from the northern Gulf of Mexico: elkhorn coral (*Acropora palmata*), lobed star coral (*Orbicella annularis*), mountainous star coral (*Orbicella faveolata*), and boulder star coral (*Orbicella franksi*). These species have been reported from the coral cap region of the Flower Garden Banks (NOAA, 2014) but are unlikely to be present as regular residents anywhere else in the northern Gulf of Mexico because they typically inhabit coral reefs in shallow, clear, tropical or subtropical waters. Other Caribbean coral species evaluated by NMFS in 2014 (79 *FR* 53852) either do not meet the criteria for ESA listing or are not known from the Flower Garden Banks. Critical habitat has been designated for elkhorn corals in the Florida Keys, but none has been designated for the other threatened coral species included above.

There are no IPFs associated with routine project activities that could affect threatened corals in the northern Gulf of Mexico. A small diesel fuel spill would not affect threatened coral species because the oil would float and dissipate on the sea surface. A large oil spill is the only relevant IPF which could affect threatened coral species.

Impacts of a Large Oil Spill

A large oil spill would be unlikely to reach coral reefs at the Flower Garden Banks or elkhorn coral critical habitat in the Florida Keys (Monroe County, Florida). The 60-day OSRA modeling predicts the conditional probability of oil contacting the Florida Keys is 0.5% or less. A surface slick would not contact corals on the seafloor. If a subsurface plume were to occur, impacts on the Flower Garden Banks would be unlikely due to the distance and the difference in water depth. Near-bottom currents in the region are predicted to flow along the isobaths (Nowlin et al., 2001) and typically would not carry a plume up onto the continental shelf edge. Valentine et al. (2014) observed the spatial distribution of excess hopane, a crude oil tracer from Macondo spill sediment core samples, to be in the deeper waters and not transported up the shelf, thus confirming that near-bottom currents flow along the isobaths.

In the unlikely event that an oil slick reached reefs at the Flower Garden Banks or other Gulf of Mexico reefs, oil droplets or oiled sediment particles could come into contact with reef organisms or corals. As discussed by BOEM (2017a), impacts could include loss of habitat, biodiversity, and live coral coverage; destruction of hard substrate; change in sediment characteristics; and reduction or loss of one or more commercial and recreational fishery habitats. Sublethal effects could be long-lasting and affect the resilience of coral colonies to natural disturbances (e.g., elevated water temperature, diseases) (BOEM, 2017a).

Due to the distance between the lease area and coral habitats, there is a low chance of oil contacting threatened coral habitat in the event of a spill, and no significant impacts on threatened coral species are expected.

C.4 Coastal and Marine Birds

C.4.1 Marine Birds

Marine birds include seabirds and other species that may occur in the pelagic environment of the project area (Clapp et al., 1982a, Clapp et al., 1982b, 1983, Peake, 1996, Hess and Ribic, 2000). Seabirds spend much of their lives offshore over the open ocean, except during breeding season when they nest on islands along the coast. Other waterbirds, such as waterfowl, marsh birds, and shorebirds may occasionally be present over open ocean areas. No endangered or threatened bird species are likely to occur at the project area. For a discussion of shorebirds and coastal nesting birds, see **Section C.4.2**.

Seabirds of the northern Gulf of Mexico were surveyed from ships during the GulfCet II program (Davis et al., 2000b). Hess and Ribic (2000) reported that terns, storm-petrels, shearwaters, and jaegers were the most frequently sighted seabirds in the deepwater area. From these surveys, four ecological categories of seabirds were documented in the deepwater areas of the Gulf: summer migrants (shearwaters, storm-petrels, boobies); summer residents that breed along the Gulf coast (Sooty Tern, Least Tern, Sandwich Tern, Magnificent Frigatebird); winter residents (gannets, gulls, jaegers); and permanent resident species (Laughing Gulls, Royal Terns, Bridled Terns) (Hess and Ribic, 2000). The GulfCet II study did not estimate bird densities; however,

Powers (1987) indicated that seabird densities over the open ocean typically are less than 10 birds km⁻².

The distributions and relative densities of seabirds within the deepwater areas of the Gulf of Mexico, including the project area, vary temporally (i.e., seasonally) and spatially. In GulfCet II studies (Davis et al., 2000b), species diversity and density varied by hydrographic environment and by the presence and relative location of mesoscale features such as Loop Current eddies that may enhance nutrient levels and productivity of surface waters where these seabird species forage (Hess and Ribic, 2000).

Trans-Gulf migratory birds including shorebirds, wading birds, and terrestrial birds may also be present in the lease area. Migrant birds may use offshore structures and vessels for resting, feeding, or as temporary shelter from inclement weather. Some birds may be attracted to offshore structures and vessels because of the lights and the fish populations that aggregate around these structures (Russell, 2005).

IPFs that could affect marine and pelagic birds include installation vessel presence, noise, and lights; support vessel and helicopter traffic; and two types of accidents (a small diesel fuel spill and a large oil spill). Effluent discharges are likely to have negligible impacts on the birds due to rapid dispersion, the small area of ocean affected, the intermittent nature of the discharges, and the mobility of these animals. Compliance with NTL BSEE-2015-G03 (Table 1) will minimize the potential for marine debris-related impacts on birds. The IPFs with potential impacts listed in Table 2 are discussed below.

Impacts of Installation Vessel Presence, Noise, and Lights

Birds migrating over water have been known to strike offshore structures, resulting in death or injury (Wiese et al., 2001, Russell, 2005). Mortality of migrant birds at tall towers and other land-based structures has been reviewed extensively, and the mechanisms involved in offshore vessels appear to be similar. In some cases, migrants simply do not see a part of the rig until it is too late to avoid it. In other cases, navigation may be disrupted by noise or lighting (Russell, 2005). However, offshore structures may in some cases serve as suitable stopover habitats for trans-Gulf migrant species, particularly in spring (Russell, 2005).

Due to the limited scope and duration of the proposed activities, any impacts on populations of either seabirds or trans-Gulf migrant birds from activities described in this DOCD are not expected to be significant.

Impacts of Support Vessel and Helicopter Traffic

Support vessels and helicopters are unlikely to significantly disturb pelagic birds in areas of open offshore waters. It is likely that individual birds would experience, at most, only short-term behavioral disruption resulting from support vessel and helicopter traffic, and the impact would not be significant.

Impacts of a Small Diesel Fuel Spill

Potential spill impacts on marine birds are discussed by BOEM (2017a, b). For this DOCD, there are no unique site-specific issues with respect to spill impacts on these animals.

Section A.9.1 discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures. Given the open ocean location of the lease area, the duration of a small spill and opportunity for impacts to occur would be very brief.

Birds exposed to oil on the sea surface could experience direct physical and physiological effects including skin irritation; chemical burns of skin, eyes, and mucous membranes; and inhalation of toxic fumes. Due to the limited areal extent and short duration of water quality impacts from a small diesel fuel spill, secondary impacts due to ingestion of oil via contaminated prey or reductions in prey abundance are unlikely. Due to the low densities of birds in open ocean areas, the small area affected, and the brief duration of the surface slick, no significant impacts on pelagic birds are expected.

Impacts of a Large Oil Spill

Potential spill impacts on marine and pelagic birds are discussed by BOEM (2017a, b). For this DOCD, there are no unique site-specific issues with respect to spill impacts on marine birds.

Pelagic seabirds could be exposed to oil from a spill at the project area. Hess and Ribic (2000) reported that terns, storm-petrels, shearwaters, and jaegers were the most frequently sighted seabirds in the deepwater Gulf of Mexico (>656 ft [>200 m]). Powers (1987) indicated that seabird densities over the open ocean typically are less than 10 birds km⁻². The number of pelagic birds that could be affected in open offshore waters would depend on the extent and persistence of the oil slick.

Data following the Macondo spill provide relevant information about the species of pelagic birds that may be affected in the event of a large oil spill. Birds that were treated for oiling include several pelagic species such as the Northern Gannet, Magnificent Frigatebird, and Masked Booby (USFWS, 2011). The Northern Gannet was among the species with greatest numbers of birds affected by the spill. NOAA reported that at least 93 resident and migratory bird species across all five Gulf Coast states were exposed to oil from the Macondo spill in multiple habitats, including offshore/open waters, island waterbird colonies, barrier islands, beaches, bays, and marshes (NOAA, 2016b). Exposure of marine birds to oil can result in adverse health with severity depending on the level of oiling. Effects can range from plumage damage and loss of buoyancy from external oiling to more severe effects, such as organ damage, immune suppression, endocrine imbalance, reduced aerobic capacity, and death as a result of oil inhalation or ingestion (NOAA, 2016b). It is expected that impacts to marine birds from a large oil spill resulting in the death of individual birds would be adverse but not significant at population levels.

C.4.2 Coastal Birds

Threatened and endangered bird species (Piping Plover and Whooping Crane) were discussed in **Sections C.3.5** and **C.3.6**. The Brown Pelican (*Pelecanus occidentalis*) was delisted from federal endangered status in 2009 (USFWS, 2016b). However, this species remains listed as endangered by both Louisiana (State of Louisiana Department of Wildlife and Fisheries, 2005) and Mississippi (Mississippi Natural Heritage Program, 2015). The Brown Pelican was delisted as a species of special concern by the State of Florida in 2017 (Florida Fish and Wildlife Conservation Commission, 2017d). Brown Pelicans inhabit coastal habitats and forage within both coastal waters and waters of the inner continental shelf. Aerial and shipboard surveys, including GulfCet

and GulfCet II (Davis et al., 2000b), indicate that Brown Pelicans do not occur in deep offshore waters (Fritts and Reynolds, 1981, Peake, 1996, Hess and Ribic, 2000). Nearly half the southeastern population of Brown Pelicans lives in the northern Gulf Coast, generally nesting on protected islands (USFWS, 2010b).

The Bald Eagle (*Haliaeetus leucocephalus*) was delisted from its threatened status in the lower 48 states on 28 June 2007. The Bald Eagle still receives protection under the Migratory Bird Treaty Act of 1918 and the Bald and Golden Eagle Protection Act of 1940 (USFWS, 2015). The Bald Eagle is a terrestrial raptor widely distributed across the southern U.S., including coastal habitats along the Gulf of Mexico. The Gulf Coast is inhabited by both wintering migrant and resident Bald Eagles (Johnsgard, 1990, Ehrlich et al., 1992).

Various species of non-endangered birds are also found along the northern Gulf Coast, including diving birds, shorebirds, marsh birds, wading birds, and waterfowl. Gulf Coast marshes and beaches also provide important feeding grounds and nesting habitats. Species that breed on beaches, flats, dunes, bars, barrier islands, and similar habitats include the Sandwich Tern, Wilson's Plover, Black Skimmer, Forster's Tern, Gull-Billed Tern, Laughing Gull, Least Tern, and Royal Tern (USFWS, 2010b). Additional information is presented by BOEM (2012a, 2017a).

IPFs that could affect coastal birds include support vessel and helicopter traffic and a large oil spill. A small diesel fuel spill in the lease area would be unlikely to affect shorebirds or coastal nesting birds, due to the lease area's distance from the nearest shoreline. As explained in **Section A.9.1**, a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion. Compliance with NTL BSEE-2015-G03 (**Table 1**) will minimize the potential for marine debris-related impacts on shorebirds.

Impacts of Support Vessel and Helicopter Traffic

Support vessels and helicopters will transit coastal areas near Port Fourchon and Houma, Louisiana, where shorebirds and coastal nesting birds may be found. These activities could periodically disturb individuals or groups of birds within sensitive coastal habitats (e.g., wetlands that may support feeding, resting, or breeding birds).

Vessel traffic may disturb foraging and resting birds. Flushing distances vary among species and individuals (Rodgers and Schwikert, 2002). The disturbances will be limited to flushing birds away from vessel pathways; known distances are from 65 to 160 ft (20 to 49 m) for personal watercraft and 75 to 190 ft (23 to 58 m) for outboard-powered boats (Rodgers and Schwikert, 2002). Flushing distances may be similar or less for the support vessels to be used for Anadarko's project, and some species such as gulls are attracted to boats. Support vessels will not approach nesting or breeding areas on the shoreline, so disturbances to nesting birds, eggs, and chicks are not expected. Vessel operators will use designated navigation channels and comply with posted speed and wake restrictions while transiting sensitive inland waterways. Due to the limited scope and short duration of support vessel activities, any short-term impacts are not expected to be biologically significant to coastal bird populations.

Aircraft traffic can cause some disturbance to birds onshore and offshore. Responses are highly dependent on the type of aircraft, bird species, activities that animals were previously engaged in, and previous exposures to overflights (Efroymson et al., 2000). Helicopters seem to cause the most intense responses when compared with other anthropogenic disturbances for some species (Bélanger and Bédard, 1989). Federal Aviation Administration Advisory Circular

No. 91-36D recommends that pilots maintain a minimum altitude of 2,000 ft (610 m) when flying over noise sensitive areas such as wildlife refuges, parks, and areas with wilderness characteristics. This is greater than the distance (slant range) at which aircraft overflights have been reported to cause behavioral effects on most species of birds studied (Efroymson et al., 2000). With adherence to the Federal Aviation Administration guidelines, it is likely that individual birds would experience, at most, only short-term behavioral disruption from aircraft traffic.

Impacts of Large Oil Spill

Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability; **Table 3**). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida. Coastal birds can be exposed to oil as they float on the water surface, dive during foraging, or wade in oiled coastal waters. Oiled birds can lose the ability to fly, dive for food, or float on the water, which could lead to drowning (USFWS, 2010a). Oil interferes with the water repellency of feathers and can cause hypothermia in the right conditions. As birds groom themselves, they can ingest and inhale the oil on their bodies. Scavengers such as Bald Eagles and gulls can be exposed to oil by feeding on carcasses of contaminated fish and wildlife. While ingestion can kill animals immediately, more often it results in lung, liver, and kidney damage, which can lead to death (BOEM, 2017a). Bird eggs may be damaged if an oiled adult sits on the nest.

Data from the Macondo spill provide an indication of the potential impacts of a large spill on coastal bird populations. According to NOAA (2016b), an estimated 51,600 to 84,500 birds were killed by the spill and the reproductive output lost as a result of breeding adult bird mortality was estimated to range from 4,600 to 17,900 fledglings that would have been produced in the absence of premature deaths of adult birds (NOAA, 2016b). Species with the largest numbers of estimated mortalities were American White Pelican, Black Skimmer, Black Tern, Brown Pelican, Laughing Gull, Least Tern, Northern Gannet, and Royal Tern (NOAA, 2016b).

Brown Pelicans are especially at risk from direct and indirect impacts from spilled oil within inner shelf and inshore waters, such as embayments. The range of this species is generally limited to these waters and surrounding coastal habitats. Brown Pelicans feed on mid-size fish that they capture by diving from above (i.e., plunge diving) and then scooping the fish into their expandable gular pouch. This behavior makes them susceptible to plumage oiling and ingestion if they feed in areas with surface oil or an oil sheen. They may also capture prey that has been physically contaminated with oil or has ingested oil. Issues for Brown Pelicans include direct contact with oil, disturbance from cleanup activities, and long-term habitat contamination (BOEM, 2012a).

The Bald Eagle also may be especially at risk from direct and indirect impacts from spilled oil. This species often captures fish within shallow water areas (snatching prey from the surface or wading into shallow areas to capture prey with their bill) and so may be susceptible to plumage oiling and, as with the Brown Pelican, they may also capture prey that have been physically contaminated with oil or have ingested oil (BOEM, 2012a). It is expected that impacts to coastal birds from a large oil spill resulting in the death of individual birds would be adverse but not significant at population levels.

C.5 Fisheries Resources

C.5.1 Pelagic Communities and Ichthyoplankton

Biggs and Ressler (2000) reviewed the biology of pelagic communities in the deepwater environment of the northern Gulf of Mexico. The biological oceanography of the region is dominated by the influence of the Loop Current, the surface waters of which are among the most oligotrophic in the world's oceans. Superimposed on this low-productivity condition are productive "hot spots" associated with entrainment of nutrient-rich Mississippi River water and mesoscale oceanographic features. Anticyclonic and cyclonic hydrographic features play an important role in determining biogeographic patterns and controlling primary productivity in the northern Gulf of Mexico (Biggs and Ressler, 2000).

Most fishes inhabiting shelf or oceanic waters of the Gulf of Mexico have planktonic eggs and larvae (Ditty, 1986, Ditty et al., 1988, Richards et al., 1989, Richards et al., 1993). A study by Ross et al. (2012) on midwater fauna to characterize vertical distribution of mesopelagic fishes in selected deepwater areas in the Gulf of Mexico substantiated high species richness but general numerical domination by relatively few families and species.

IPFs potentially affecting pelagic communities and ichthyoplankton include installation vessel presence, noise, and lights; effluent discharges; water intakes; and two types of accidents (a small diesel fuel spill and a large oil spill).

Impacts of Installation Vessel Presence, Noise, and Lights

The installation vessels, as floating structures in the deepwater environment, will act as a fish aggregating device (FAD). In oceanic waters, the FAD effect would be most pronounced for epipelagic fishes such as tunas, dolphin, billfishes, and jacks, which are commonly attracted to fixed and drifting surface structures (Higashi, 1994, Relini et al., 1994, Holand, 1997). Positive fish associations with offshore rigs and platforms in the Gulf of Mexico are well documented (Gallaway and Lewbel, 1982, Wilson et al., 2003, Peabody and Wilson, 2006). The FAD effect could possibly enhance the feeding of epipelagic predators by attracting and concentrating smaller fish species.

Installation vessel noise could potentially cause masking in fishes, thereby reducing their ability to hear biologically relevant sounds (Radford et al., 2014). The only defined acoustic threshold levels for continuous noise are given by Popper et al. (2014) and apply only to species of fish with swim bladders that provide some hearing (pressure detection) function. Popper et al. (2014) estimated threshold levels of 170 dB re 1 μ Pa accumulated over a 48-hour period for onset of recoverable injury and 158 dB re 1 μ Pa accumulated over a 12-hour period for onset temporary auditory threshold shifts. However, no consistent behavioral thresholds for fish have been established (Hawkins and Popper, 2014). Noise may also influence fish behaviors, such as predator-avoidance, foraging, reproduction, intraspecific interactions (Picciulin et al., 2010, Bruintjes and Radford, 2013, McLaughlin and Kunc, 2015, Nedelec et al., 2017). Fish aggregating is likely to occur to some degree due to the presence of the installation vessels, but the impacts would be limited in geographic scope and no population level impacts are expected.

Few data exist regarding the impacts of noise on pelagic larvae and eggs. Generally, it is believed that larval fish will have similar hearing sensitivities as adults, but may be more susceptible to barotrauma injuries associated with impulsive noise (Popper et al., 2014). Larval fish were

experimentally exposed to simulated impulsive sounds by Bolle et al. (2012). The controlled playbacks produced cumulative exposures of 206 dB re 1 μ Pa²·s, but resulted in no increased mortality between the exposure and control groups. Non-impulsive noise sources are expected to be less injurious than impulsive noise. Based on transmission loss calculations for open water propogation, DP thrusters are not expected to produce received levels greater than 160 dB re 1 μ Pa beyond 82 ft (25 m) from the source. Because of the limited propagation distances of high sound pressure levels and the periodic and transient nature of ichthyoplankton, no impacts to these life stages are expected.

Impacts of Effluent Discharges

Treated sanitary and domestic wastes may have a slight effect on the pelagic environment in the immediate vicinity of these discharges. These wastes may have elevated levels of nutrients, organic matter, and chlorine, but should dilute rapidly to undetectable levels within tens to hundreds of meters from the source. As a result of quick dilution, minimal impacts on water quality, plankton, and nekton are anticipated.

Deck drainage may have a slight effect on the pelagic environment in the immediate vicinity of these discharges. Deck drainage from contaminated areas will be passed through an oil-and-water separator prior to release, and discharges will be monitored for visible sheen. The discharges may have slightly elevated levels of hydrocarbons but should dilute rapidly to undetectable levels within tens to hundreds of meters from the source. Minimal impacts on water quality, plankton, and nekton are anticipated.

Other discharges in accordance with the NPDES permit, such as non-pollutant completion fluids, wash water, desalination unit brine, produced water, and uncontaminated cooling water, fire water, bilge, and ballast water, are expected to dilute rapidly and have little or no impact on water column biota.

Impacts of Water Intakes

Seawater will be drawn from the ocean for once-through, non-contact cooling of machinery on the installation vessels. The installation vessels utilized for this project will be in compliance with all cooling water intake requirements of the NPDES permit to comply with Section 316(b) of the Clean Water Act.

The intake of seawater for cooling water will entrain plankton. The low intake velocity should allow most strong-swimming juvenile fishes and smaller adults to escape entrainment or impingement. However, drifting plankton would not be able to escape entrainment with the exception of a few fast-swimming larvae of certain taxonomic groups. The entrained organisms may be stressed or killed, primarily through changes in water temperature during the route from cooling intake structure to discharge structure and through mechanical damage (turbulence in pumps and condensers). Due to the limited scope and duration of proposed activities, any short-term impacts of entrainment are not expected to be significant on a population level for plankton or ichthyoplankton (BOEM, 2017a).

Impacts of a Small Diesel Fuel Spill

Potential spill impacts on fisheries resources are discussed by BOEM (2017a, b). For this DOCD, there are no unique site-specific issues with respect to spill impacts.

Section A.9.1 discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures. Given the open ocean location of the lease area and the duration of a small spill, the opportunity for impacts to occur would be very brief.

A small diesel fuel spill could have localized impacts (i.e., hydrocarbon contamination) on phytoplankton, zooplankton, and nekton. Due to the limited areal extent and short duration of water quality impacts, a small diesel fuel spill would be unlikely to produce detectable impacts on pelagic communities.

Impacts of a Large Oil Spill

Potential spill impacts on pelagic communities and ichthyoplankton are discussed by BOEM (2016b, 2017a, b). For this DOCD, there are no unique site-specific issues.

A large oil spill could directly affect water column biota including phytoplankton, zooplankton, ichthyoplankton, and nekton. A large spill that persisted for weeks or months would be more likely to affect these communities. While adult and juvenile fishes may actively avoid a large spill, planktonic eggs and larvae would be unable to avoid contact. Fish eggs and larvae are especially vulnerable to oiling because they inhabit the upper layers of the water column, and they will die if exposed to certain toxic fractions of spilled oil. Impacts could be greater if local-scale currents retained planktonic larval assemblages (and the floating oil slick) within the same water mass. Impacts to ichthyoplankton from a large spill would be greatest during spring and summer when shelf concentrations peak (BOEM, 2016b). Adult and juvenile fishes could also be impacted through the ingestion of oiled prey (USFWS, 2010a). It is expected that impacts to pelagic communites and ichthyoplankton from a large oil spill resulting in the death of individual fishes would be adverse but not significant at population levels.

C.5.2 Essential Fish Habitat

Essential Fish Habitat (EFH) is defined as the waters and substrate necessary to fish for spawning, breeding, feeding, and growth to maturity. Under the Magnuson-Stevens Fishery Conservation and Management Act, as amended, federal agencies are required to consult on activities that may adversely affect EFH designated in Fishery Management Plans developed by the regional Fishery Management Councils.

The Gulf of Mexico Fishery Management Council (GMFMC) has prepared Fishery Management Plans for corals and coral reefs, shrimps, spiny lobster, reef fishes, coastal migratory pelagic fishes, and red drum. In 2005, the EFH for these managed species was redefined in Generic Amendment No. 3 to the various Fishery Management Plans (Gulf of Mexico Fishery Management Council, 2005). The EFH for most of these GMFMC-managed species is on the continental shelf in waters shallower than 600 ft (183 m). The shelf edge is the outer boundary for coastal migratory pelagic fishes, reef fishes, and shrimps. EFH for corals and coral reefs includes some shelf-edge topographic features located approximately 114 miles (183 km) north of the lease area.

Highly migratory pelagic fishes, which occur as transients in the lease area, are the only remaining group for which EFH has been identified in the deepwater Gulf of Mexico. Species in this group, including tunas, swordfishes, billfishes, and sharks are managed by NMFS. Highly

migratory species with EFH in or near the lease area include the following species and life stages (NMFS, 2009b):

- Bigeye thresher shark (all)
- Bigeye tuna (adults)
- Blue marlin (juveniles, adults)
- Bluefin tuna (spawning, eggs, larvae, adults)
- Longfin mako shark (all)

- Oceanic whitetip shark (all)
- Skipjack tuna (spawning, adults)
- Swordfish (larvae, juveniles, adults)
- Tiger shark (adults)
- White marlin (juveniles, adults)
- Yellowfin tuna (spawning, juveniles, adults)

Research indicates the central and western Gulf of Mexico may be important spawning habitat for Atlantic bluefin tuna (*Thunnus thynnus*), and NMFS (2009b) has designated a Habitat Area of Particular Concern (HAPC) for this species. The HAPC covers much of the deepwater Gulf of Mexico, including the lease area (**Figure 4**). The areal extent of the HAPC is approximately 115,830 miles² (300,000 km²). The prevailing assumption is that Atlantic bluefin tuna follow an annual cycle of foraging in June through March off the eastern U.S. and Canadian coasts, followed by migration to the Gulf of Mexico to spawn in April, May, and June (NMFS, 2009b). The Atlantic bluefin tuna has also been designated as a species of concern (NMFS, 2011).

An amendment to the original EFH Generic Amendment was finalized in 2005 (Gulf of Mexico Fishery Management Council, 2005). One of the most significant proposed changes in this amendment reduced the extent of EFH relative to the 1998 Generic Amendment by removing the EFH description and identification from waters between 100 fathoms and the seaward limit of the Exclusive Economic Zone. The Highly Migratory Species Fisheries Management Plan was amended in 2009 to update EFH and HAPC to include the bluefin tuna spawning area (NMFS, 2009b).

NTLs 2009-G39 and 2009-G40 provide guidance and clarification of regulations for biologically sensitive underwater features and areas and benthic communities that are considered EFH. As part of an agreement between BOEM and NMFS to complete a new programmatic EFH consultation for each new Five-Year Program, an EFH consultation was initiated between BOEM's Gulf of Mexico Region and NOAA's Southeastern Region during the preparation, distribution, and review of BOEM's 2017-2022 Multisale EIS (BOEM, 2017a). The EFH assessment was completed and there is ongoing coordination among NMFS, BOEM, and BSEE, including discussions of mitigation (BOEM, 2016c).

Other HAPCs have been identified by the Gulf of Mexico Fishery Management Council (2005). These include the Florida Middle Grounds, Madison-Swanson Marine Reserve, Dry Tortugas North and South Ecological Reserves, Pulley Ridge, and several individual reefs and banks of the northwestern Gulf of Mexico. (**Figure 4**). The nearest HAPC is Rezak Sidner Bank, located approximately 196 miles (315 km) north of the lease area.

IPFs that could affect EFH include installation vessel presence, noise, and lights; effluent discharges; water intakes; and two types of accidents (a small diesel fuel spill and a large oil spill).

Impacts of Installation Vessel Presence, Noise, and Lights

The installation vessels, as floating structures in the deepwater environment, will act as a FAD. In oceanic waters, the FAD effect would be most pronounced for EFH of epipelagic fishes such as tunas, dolphin, billfishes, and jacks, which are commonly attracted to fixed and drifting surface structures (Holland, 1990, Higashi, 1994, Relini et al., 1994). The FAD effect would possibly enhance feeding of epipelagic predators by attracting and concentrating smaller fish species. Installation vessel noise could potentially cause acoustic masking for fishes, thereby reducing their ability to hear biologically relevant sounds (Radford et al., 2014). Noise may also influence fish behaviors such as predator avoidance, foraging, reproduction, and intraspecific interactions (Picciulin et al., 2010, Bruintjes and Radford, 2013, McLaughlin and Kunc, 2015). Because the installation vessels are temporary structures, any impacts on EFH for highly migratory pelagic fishes are considered minor.

Impacts of Effluent Discharges

Effluent discharges affect EFH by diminishing ambient water quality include treated sanitary and domestic wastes, deck drainage, non-pollutant completion fluids, and miscellaneous discharges such as desalination unit brine, wash water, uncontaminated cooling water, fire water, and bilge and ballast water. Impacts on water quality have been discussed previously. No significant impacts on EFH for highly migratory pelagic fishes are expected from these discharges if discharged according to NPDES permit conditions.

Impacts of Water Intakes

As noted previously, cooling water intake will cause entrainment and impingement of plankton, including fish eggs and larvae (ichthyoplankton). Due to the limited scope and relatively short duration of installation activities, any short-term impacts on EFH for highly migratory pelagic fishes due to water intake are not expected to be biologically significant if operated in compliance with USEPA requirements.

Impacts of a Small Diesel Fuel Spill

Potential spill impacts on EFH are discussed by BOEM (2016c, 2017a). For this DOCD, there are no unique site-specific issues with respect to spill impacts.

Section A.9.1 discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures. Given the open ocean location of the lease area, the duration of a small spill and opportunity for impacts to occur would be very brief.

A small diesel fuel spill could have localized impacts on EFH for highly migratory pelagic fishes, including tunas, swordfishes, billfishes, and sharks. These species occur as transients in the lease area. A spill would also produce short-term impacts on surface and near-surface water quality in the HAPC for spawning bluefin tuna, which covers much of the deepwater Gulf of Mexico. The affected area would represent a negligible portion of the HAPC, which covers approximately 115,830 miles² (300,000 km²) of the Gulf of Mexico.

A small diesel fuel spill would likely not affect EFH for corals and coral reefs, the nearest of which is located approximately 114 miles (183 km) north of the project area. A small diesel fuel spill would float and dissipate on the sea surface and before reaching these features.

Impacts of a Large Oil Spill

Potential spill impacts on EFH are discussed by BOEM (2016c, 2017a). For this DOCD, there are no unique site-specific issues with respect to EFH.

An oil spill in offshore waters would temporarily increase hydrocarbon concentrations on the water surface and potentially in the subsurface as well. Given the extent of EFH designations in the Gulf of Mexico (Gulf of Mexico Fishery Management Council, 2005, NMFS, 2009b), some impact on EFH would be unavoidable.

A large spill could affect the EFH of many managed species including shrimp, spiny lobster, reef fishes, coastal migratory pelagic fishes, and red drum. It would result in adverse impacts on water quality and water column biota including phytoplankton, zooplankton, and nekton. In coastal waters, sediments could be contaminated and result in persistent degradation of the seafloor habitat for managed demersal fish and shellfish species.

The lease area is within the HAPC for spawning Atlantic bluefin tuna (NMFS, 2009b). A large spill could temporarily degrade the HAPC water quality due to increased hydrocarbon concentrations in the water column, with the potential for lethal or sublethal impacts on spawning tuna. Potential impacts would depend in part on the timing of a spill, as the species migrates to the Gulf of Mexico to spawn in April, May, and June (NMFS, 2009b).

The nearest feature designated as EFH for corals is located approximately 114 miles (183 km) north from the lease area. An accidental spill could reach or affect this feature, although near-bottom currents in the region are expected to flow along the isobaths (Nowlin et al., 2001, Valentine et al., 2014) and typically would not carry a plume up onto the continental shelf edge, where the coral EFH is located.

C.6 Archaeological Resources

C.6.1 Shipwreck Sites

Based on NTL 2011-JOINT-G01, the lease area is on BOEM's list of archaeology survey blocks (BOEM, 2011). No archaeological resources were noted in the site clearance letters for the wellsites where the installation activities will occur (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017).

Anadarko will abide by the applicable requirements of NTL 2005-G07, which stipulate that work be stopped at the project site if any previously undetected archaeological resource is discovered after work has begun and until appropriate surveys and evaluations have been completed. Because there are no known shipwreck sites in the lease area, there are no routine IPFs that are likely to affect shipwrecks. Impacts of a large oil spill are the only IPFs considered. A small diesel fuel spill would not affect shipwrecks because the oil would float and dissipate on the sea surface.

Impacts of a Large Oil Spill

BOEM (2012a) estimated that a severe subsurface blowout could resuspend and disperse sediments within a 984 ft (300 m) radius. Because there are no historic shipwrecks in the lease area, this impact would not be relevant.

Beyond this radius, there is the potential for impacts from oil, dispersants, and depleted oxygen levels (BOEM, 2017a) on potential shipwreck sites. These impacts could include chemical contamination as well as alteration of the rates of microbial activity (BOEM, 2017a), During the Macondo spill, subsurface plumes were reported at a water depth of approximately 3,609 ft (1,100 m), extending at least 22 miles (35 km) from the wellsite and persisting for more than a month (Camilli et al., 2010). The subsurface plumes apparently resulted from the use of subsea dispersants at the wellhead (NOAA, 2011c). While the behavior and impacts of subsurface plumes are not well known, a subsurface plume could have the potential to contact shipwreck sites beyond the 984 ft (300 m) radius estimated by BOEM (2012a), depending on its extent, trajectory, and persistence (Spier et al., 2013). If oil from a subsea spill should come into contact with shipwrecks on the seafloor, it could adversely affect their condition or preservation. Should there be any indication that potential shipwreck sites could be affected, in accordance with NTL 2005-G07, Anadarko will immediately halt operations, take steps to ensure that the site is not disturbed in any way, and contact the BOEM Regional Supervisor, Leasing and Environment, within 48 hours of its discovery. Anadarko would cease all operations within 1,000 ft (305 m) of the site until the Regional Supervisor provides instructions on steps to take to assess the site's potential historic significance and protect it.

A spill entering shallow coastal waters could conceivably contaminate an undiscovered shipwreck site. Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida. If an oil spill contacted a coastal historic site, such as a fort or a lighthouse, the impacts may be temporary and reversible (BOEM, 2017a).

C.6.2 Prehistoric Archaeological Sites

With a water depth at the location of the proposed activities of approximately 7,393 ft (2,253 m), the project area is well beyond the 197 ft (60 m) depth contour used by BOEM as the seaward extent for prehistoric archaeological site potential in the Gulf of Mexico. Because of this, the only relevant IPF is a large oil spill. A small diesel fuel spill would not affect prehistoric archaeological resources because the oil would float and dissipate on the sea surface.

Impacts of a Large Oil Spill

Because of the water depth and the lack of prehistoric archaeological sites found in the lease area, such sites would not be impacted by the physical effects of a subsea blowout. BOEM (2012a) estimated that a severe subsurface blowout could resuspend and disperse sediments within a 984 ft (300 m) radius.

Along the northern Gulf Coast, prehistoric sites occur frequently along the barrier islands and mainland coast and along the margins of bays and bayous (BOEM, 2016a). Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida. If a spill did reach a prehistoric site along these shorelines, it could coat fragile artifacts or site features and compromise the potential for radiocarbon dating organic materials in a site. Coastal prehistoric sites also could

be damaged by spill cleanup operations (e.g., by destroying fragile artifacts, disturbing the provenance of artifacts and site features). BOEM (2017c) notes that some unavoidable direct and indirect impacts on coastal historic resources could occur, resulting in the loss of information.

C.7 Coastal Habitats and Protected Areas

Coastal habitats in the northeastern Gulf of Mexico that may be affected by oil and gas activities are described by BOEM (2016a, 2017a, b), and are tabulated in the OSRP. Coastal habitats inshore of the project area include coastal and barrier island beaches and dunes, wetlands, and submerged seagrass beds. Most of the northeastern Gulf of Mexico is fringed by coastal and barrier island beaches, with wetlands and submerged seagrass beds occurring in sheltered areas behind the barrier islands and in estuaries.

Due to the distance from shore, the only IPF associated with routine activities in the lease area that could affect beaches and dunes, wetlands, seagrass beds, coastal wildlife refuges, wilderness areas, or any other managed or protected coastal area is support vessel traffic. The support bases at Port Fourchon and Houma, Louisiana, are not in wildlife refuges or wilderness areas. Potential impacts of support vessel traffic are briefly addressed below.

A large oil spill is the only accidental IPF that could affect coastal habitats and protected areas. A small diesel fuel spill in the lease area would be unlikely to affect coastal habitats due to the lease area's distance from the nearest shoreline. As explained in **Section A.9.1**, a small diesel fuel spill would not be expected to make landfall or reach coastal waters prior to natural dispersion.

Impacts of Support Vessel Traffic

Support operations, including crew boats and supply boats as detailed in DOCD Section H, may have a minor incremental impact on coastal and barrier island beaches, wetlands, and protected areas. Over time with a large number of vessel trips, vessel wakes can erode shorelines along inlets, channels, and harbors, resulting in localized land loss. Impacts to beaches, wetlands, and protected areas will be minimized by following the speed and wake restrictions in harbors and channels.

Support operations, including crew boats and supply boats are not anticipated to have a significant impact on submerged seagrass beds. While submerged seagrass beds have the potential to be uprooted, scarred, or lost due to direct contact from vessels, use of navigation channels and adherence to local requirements and implemented programs will decrease the likelihood of impacts to submerged seagrass beds (BOEM, 2017a, b).

Impacts of a Large Oil Spill

Potential spill impacts on coastal habitats are discussed by BOEM (2017a). Coastal habitats inshore of the project area include coastal and barrier island beaches, wetlands, submerged seagrass beds, coastal wildlife refuges and wildnerness areas. For this DOCD, there are no unique site-specific issues with respect to coastal habitats.

Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range

from Cameron County, Texas, to Miami-Dade County, Florida. The shorelines within the geographic range predicted by the 60-day OSRA modeling (**Table 4**) include extensive barrier beaches and wetlands, with submerged seagrass beds occurring in sheltered areas behind the barrier islands and in estuaries. NWRs and other protected areas along the coast are discussed by BOEM (2017a) and Anadarko's OSRP. Based on the 30-day OSRA, coastal and near-coastal wildlife refuges, wilderness areas, and state and national parks within the geographic range of the potential shoreline contacts within 30 days are presented in **Table 7**.

Table 7. Wildlife refuges, wilderness areas, and state and national parks and preserves within the geographic range of 1% or greater conditional probability of shoreline contacts within 30 days based on the 30-day Oil Spill Risk Analysis model.

County or Parish, State	Wildlife Refuge, Wilderness Area, or State/National Park
Kenedy, Texas	Laguna Madre Gulf Ecological Management Site
	Padre Island National Seashore
Kelberg, Texas	Laguna Madre Gulf Ecological Management Site
	Padre Island National Seashore
Aransas, Texas	Aransas National Wildlife Refuge
	Goose Island State Park
	Lydia Ann Island Audubon Sanctuary
	Rattlesnake Island, Ayres Island, and Roddy Island Audubon
	Sanctuary
	Redfish Bay State Scientific Area
	Mission-Aransas National Estuarine Research Reserve
Calhoun, Texas	Aransas National Wildlife Refuge
	Chester Island Bird Sanctuary
	Guadalupe Delta Wildlife Management Area
	Matagorda Island Wildlife Management Area
	Welder Flats Wildlife Management Area
	Big Boggy National Wildlife Refuge
	Matagorda Bay Nature Park
Matagorda, Texas	San Bernard National Wildlife Refuge
	West Moring Dock Park
Brazoria, Texas	Brazoria National Wildlife Refuge
	Christmas Bay Coastal Preserve
	Justin Hurst Wildlife Management Area
	San Bernard National Wildlife Refuge
	Anahuac National Wildlife Refuge
Galveston, Texas	Bolivar Flats Shorebird Sanctuary
	Fort Travis Seashore Park
	Galveston Island State Park
	Horseshoe Marsh Bird Sanctuary
	Mundy Marsh Bird Sanctuary
	R.A. Apffel Park
	Seawolf Park
Jefferson, Texas	McFaddin National Wildlife Refuge
	Sea Rim State Park
	Texas Point National Wildlife Refuge
Cameron, Louisiana	Sabine National Wildlife Refuge
	Rockefeller State Wildlife Refuge and Game Preserve
	Peveto Woods Sanctuary

Table 7. (Continued).

County or Parish, State	Wildlife Refuge, Wilderness Area, or State/National Park
Vermilion, Louisiana	Paul J. Rainey Wildlife Refuge and Game Preserve
	Rockefeller State Wildlife Refuge and Game Preserve
	State Wildlife Refuge

The level of impacts from oil spills on coastal habitats depends on many factors, including the oil characteristics, the geographic location of the landfall, and the weather and oceanographic conditions during the time of the spill (BOEM, 2017a). Oil that makes it to beaches may be either liquid weathered oil, an oil-and-water mousse, or tarballs. Oil is generally deposited on beaches in lines defined by wave action at the time of landfall. Oil that remains on the beach will thicken as its volatile components are lost. Thickened oil may form tarballs or aggregations that incorporate sand, shell, and other materials into its mass. Tar may be buried to varying depths under the sand. On warm days, both exposed and buried tarballs may liquefy and ooze. Oozing may also serve to expand the size of a mass as it incorporates beach materials. Oil on beaches may be cleaned up manually, mechanically, or both. Some oil can remain on the beach at varying depths and may persist for several years as it slowly biodegrades and volatilizes (BOEM, 2017a). Impacts associated with an extensive oiling of coastal and barrier island beaches from a large oil spill are expected to be adverse.

Coastal wetlands are highly sensitive to oiling and can be significantly affected because of the inherent toxicity of hydrocarbon and non-hydrocarbon components of the spilled substances (Beazley et al., 2012, Lin and Mendelssohn, 2012, Mendelssohn et al., 2012). Numerous variables such as oil concentration and chemical composition, vegetation type and density, season or weather, preexisting stress levels, soil types, and water levels may influence the impacts of oil exposure on wetlands. Light oiling could cause plant die-back, followed by recovery in a fairly short time. Vegetation exposed to oil that persists in wetlands could take years to recover (BOEM, 2017a). However, in a study in Barataria Bay, Louisiana, after the Macondo spill. Silliman et al. (2012) reported that vegetation in previously healthy marshes largely recovered to a pre-oiling state within 18 months. However, oiled marshes that had prior accelerated rates of erosion experienced a bio-geomorphological feedback that increased marsh loss to erosion and did not allow marsh regrowth (Silliman et al., 2012). In addition to the direct impacts of oil, cleanup activities in marshes may accelerate rates of erosion and retard recovery rates (BOEM, 2017a, Lin et al., 2016, Turner et al., 2016). A recent review of the literature and new studies indicated that oil spill impacts to seagrass beds are often limited and may be limited to when oil is in direct contact with these plants (Fonseca et al., 2017). This conclusion is supported by the findings of Kenworthy et al. (2017) who reported that oil expoosure following the Macondo spill did not result in shelf-wide seagrass declines in the Chandeleur Islands, Louisiana.

Impacts associated with an extensive oiling of coastal wetland habitat from a large oil spill are expected to be significant.

C.8 Socioeconomic and Other Resources

C.8.1 Recreational and Commercial Fishing

Potential impacts to recreational and commercial fishing are analyzed by BOEM (2017a). The major species sought by commercial fishermen in federal waters of the Gulf of Mexico include shrimp, menhaden, red snapper, tunas, and groupers (BOEM, 2017a). However, most of the fishing effort for these species is on the continetnal shelf in shallow waters. The main commercial fishing activity in deep waters of the northern Gulf of Mexico is pelagic longlining for tunas, swordfishes, and other billfishes (Continental Shelf Associates, 2002). Pelagic longlining has occurred historically in the project area, primarily during spring and summer.

Longline gear consists of monofilament line deployed from a moving vessel and generally allowed to drift for 4 to 5 hours. As the mainline is put out, baited leaders and buoys are clipped in place at regular intervals. It takes 8 to 10 hours to deploy a longline and approximately the same time to retrieve it. Longlines are often set near oceanographic features such as fronts or downwellings, with the aid of sophisticated onboard temperature sensors, depth finders, and positioning equipment. Vessels typically are 33 to 98 ft (10 to 30 m) long, and their trips last from 1 to 3 weeks. The main Gulf of Mexico homeports for longlining vessels are in Louisiana (Dulac and Venice) and Florida (Destin, Madeira Beach, and Panama City) (Continental Shelf Associates, 2002).

It is unlikely that any commercial fishing activity other than longlining will occur in or near the project area due to the water depth at the project area. Benthic species targeted by commercial fishers occur on the upper continental slope, well inshore of the project area. Royal red shrimp (*Pleoticus robustus*) are caught by trawlers in water depths of approximately 820 to 1,804 ft (250 to 550 m). Tilefishes (primarily *Lophalotilus chamaeleonticeps*) are caught by bottom longlining in water depths from approximately 540 to 1,476 ft (165 to 450 m) (Continental Shelf Associates, 2002).

Most recreational fishing activity in the region occurs in water depths less than 656 ft (200 m) (Continental Shelf Associates, 1997, 2002). In deeper water, the main attraction to recreational fishers is petroleum rigs offshore Texas and Louisiana. Due to the project site's distance from shore, it is unlikely that recreational fishing activity is occurring in the lease area.

The only routine IPF potentially affecting fisheries and, therefore, commercial and recreational fishing, is installation vessel presence, noise, and lights. Potential accidental IPFs that could affect fisheries are include both a small diesel fuel spill and a large oil spill.

Impacts of Installation Vessel Presence, Noise, and Lights

There is a slight possibility of pelagic longlines becoming entangled in the installation vessels. For example, in January 1999 a portion of a pelagic longline snagged on the acoustic Doppler current profiler of a drillship working in the Gulf of Mexico (Continental Shelf Associates, 2002). The line was removed without incident. Generally, longline fishers use radar and are aware of offshore structures and ships when placing their sets. Therefore, little or no impact on pelagic longlining is expected.

Because it is unlikely that any recreational fishing activity is occurring in the project area, no adverse impacts are anticipated. Other factors such as effluent discharges are likely to have

negligible impacts on commercial or recreational fisheries due to rapid dispersion, the small area of ocean affected, and the intermittent nature of the discharges.

Impacts of a Small Diesel Fuel Spill

Pelagic longlining activities in the lease area, if any, could be interrupted in the event of a small diesel fuel spill. Fishing activities could be interrupted due to the activities of response vessels operating in the lease area. Given the open ocean location of the lease area, the duration of a small spill and opportunity for impacts to occur is expected to be very brief. **Section A.9.1** discusses the size and fate of a potential small diesel fuel spill as a result of Anadarko's proposed activities. DOCD Section I provides detail on spill response measures.

Impacts of a Large Oil Spill

Potential spill impacts on fishing activities are discussed by BOEM (2017a). For this DOCD, there are no unique site-specific issues with respect to this activity.

Pelagic longlining activities in the lease area and other fishing activities in the northern Gulf of Mexico could be interrupted in the event of a large oil spill. A spill may or may not result in fishery closures, depending on the duration of the spill, the oceanographic and meteorological conditions at the time, and the effectiveness of spill response measures. Data following the Macondo spill provide information about the maximum potential extent of fishery closures in the event of a large oil spill in the Gulf of Mexico (NMFS, 2010a). At its peak on 12 July 2010, closures encompassed 84,101 miles² (217,821 km²), or 34.8% of the U.S. Gulf of Mexico Exclusive Economic Zone. BOEM (2012a) notes that fisheries closures from a large spill event could have a negative effect on short-term fisheries catch and marketability.

According to BOEM (2012a, 2017a, b), the potential impacts on commercial and recreational fishing activities from an accidental oil spill are anticipated to be minimal because the potential for oil spills is very low, the most typical events are small and of short duration, and the effects are so localized that fishes are typically able to avoid the affected area. Fish populations may be affected by an oil spill event should it occur, but they would be primarily affected if the oil reaches the productive shelf and estuarine areas where many fishes spend a portion of their life cycle. However, most species of commerically valuable fish in the Gulf of Mecixo have planktonic eggs or larvae which may be affected by a large oil spill in deep water (BOEM, 2017a). The probability of an offshore spill directly affecting nearshore environments is also low. Should a large oil spill occur, economic impacts on commercial and recreational fishing activities would likely occur, but are difficult to predict because impacts would differ by fishery and season (BOEM, 2017a, b). An analysis of the effects of the Macondo spill on the seafood industry in the Gulf of Mexico estimated that the spill reduced total seafood sales by \$51.7 to \$952.9 million, with an estimated 740 to 9,315 seafood related jobs lost (Carroll et al., 2016).

C.8.2 Public Health and Safety

There are no IPFs associated with routine operations that are expected to affect public health and safety. A small diesel fuel spill would not have any impacts on public health and safety because it would affect only a small area of the open ocean. The lease area is approximately 213 miles (343 km) from the nearest shoreline and nearly all of the diesel fuel would evaporate or disperse naturally within 24 hours (**Section A.9.1**). Impacts of a large oil spill are addressed below.

Impacts of a Large Oil Spill

In the event of a large spill from a blowout, the main safety and health concerns are those of the offshore personnel involved in the incident and those responding to the spill. The proposed activities will be covered by Anadarko's Regional OSRP and the installation vessels' emergency response plans.

Depending on the spill rate and duration, the physical/chemical characteristics of the oil, meteorological and oceanographic conditions at the time, and the effectiveness of spill response measures, the public could be exposed to oil on the water and along the shoreline, including skin contact or breathing VOCs. Oil is a highly flammable material, and any smoke or vapors from an oil fire can cause irritation, and in large quantities may pose a health hazard.

Studies conducted after the Macondo spill provide relevant information about the types of health issues that may occur in the event of a large oil spill. Wildlife cleaning and rehabilitation workers have reported concerns including scrapes and cuts, itchy or red skin or rash, and symptoms of headache or feeling faint, dizzy, or fatigued (King and Gibbins, 2011). Hand, shoulder, or back pain was reported by some wildlife-cleaning workers as well. Awkward postures, repetitive motions, and heavy lifting tasks were noted by investigators as contributing to musculoskeletal symptoms. Personnel working on offshore vessels or providing direct oversight to offshore vessels, including USCG personnel, civilian contractors, and other responders who were exposed to oil and dispersants, had a 7 to 12 times higher prevalence of upper respiratory symptoms and cough than those not exposed (Centers for Disease Control and Prevention, 2010). Another potential occupational hazard for spill response workers in general was heat stress from work in a hot and humid environment (King and Gibbins, 2011). Initial symptoms from cleanup workers who sought medical care in Louisiana were typical of acute exposure to hydrocarbons or H_2S (e.g., headaches, dizziness, nausea, vomiting, cough, respiratory distress, chest pain) (Solomon and Janssen, 2010). Impacts associated with a large oil spill to public safety are expected to be adverse but not significant.

C.8.3 Employment and Infrastructure

There are no IPFs associated with routine operations that are expected to affect employment and infrastructure. The project involves support from an installation vessel contractor and associated third-party services, and existing shorebase facilities in Louisiana. No new or expanded facilities will be constructed, and no new employees are expected to move permanently into the area. The project will have a negligible impact on socioeconomic conditions such as local employment and existing offshore and coastal infrastructure. A small diesel fuel spill that is dissipated within a few days would have little or no economic impact, as the spill response would use existing facilities, resources, and personnel. Impacts of a large oil spill on employment and infrastrucre are addressed below.

Impacts of a Large Oil Spill

Potential socioeconomic impacts of an oil spill are discussed by BOEM (2017a, b). For this DOCD, there are no unique site-specific issues with respect to employment and coastal infrastructure. A large spill could cause economic impacts in several ways: it could result in extensive fishery closures that put fishermen out of work; it could result in temporary employment as part of the response effort; it could result in adverse publicity that affects employment in coastal recreation

and tourism industries; and it could result in another suspension of OCS drilling activities, including service and support operations that are an important part of local economies.

In addition to the analyses presented by BOEM (2012a), a study explored the economic impacts of the Macondo spill on oil and gas industry employment due to suspension of deepwater drilling (U.S. Department of Commerce, 2010). The study indicates that during the moratorium, the number of oil industry workers in the Gulf of Mexico fell by approximately 2,000 and may have indirectly caused a temporary loss of 8,000 to 12,000 jobs along the Gulf Coast. Total spending by drilling operators is estimated to have declined by \$1.8 billion over a 6-month period; this direct reduction in spending affected employment in the industries that supply the Gulf drilling industry and in all other industries affected by declines in consumer and business spending (U.S. Department of Commerce, 2010).

As noted by BOEM (2012a), the short-term social and economic consequences for the Gulf Coast region should a large spill occur include the opportunity cost of employment and expenditures that could have gone to production or consumption rather than towards spill cleanup efforts. Nonmarket effects such as traffic congestion, strains on public services, shortages of commodities or services, and disruptions to the normal patterns of activities or expectations could also occur in the short term. These negative, short-term social and economic consequences of a spill are expected to be modest in terms of projected cleanup expenditures and the number of people employed in cleanup and remediation activities (BOEM, 2017a). Net employment impacts from a spill would not be expected to exceed 1% of baseline employment in any given year (BOEM, 2012a).

C.8.4 Recreation and Tourism

For this DOCD, there are no unique site-specific issues with respect to this recreation and tourism. There are no known recreational uses of the lease area. Recreational resources and tourism in coastal areas would not be affected by any routine activities due to the distance from shore. Compliance with NTL BSEE-2015-G03 (**Table 1**) will minimize the chance of trash or debris being lost overboard from the installation vessels and subsequently washing up on beaches. A small diesel fuel spill in the lease area would be unlikely to affect recreation and tourism because, as explained in **Section A.9.1**, it would not be expected to reach coastal waters. Impacts of a large oil spill on recreation and tourism are discussed below.

Impacts of a Large Oil Spill

Potential impacts of an oil spill on recreation and tourism are discussed by BOEM (2017a, b). For this DOCD, there are no unique site-specific issues with respect to these impacts.

Impacts on recreation and tourism would vary depending on the duration of the spill and its fate including the effectiveness of response measures. A large spill that reached coastal waters and shorelines could adversely affect recreation and tourism by contaminating beaches and wetlands, resulting in negative publicity that encourages people to stay away. Based on the 30-day OSRA modeling (**Table 3**), coastal areas between Kenedy County, Texas and Vermilion Parish, Louisiana could be affected within 30 days (1% to 2% conditional probability). Based on the 60-day OSRA modeling estimates (**Table 4**), the potential shoreline contacts range from Cameron County, Texas, to Miami-Dade County, Florida.

According to BOEM (2017a), should an oil spill occur and contact a beach area or other recreational resource, it would cause some disruption during the impact and cleanup phases of the spill. However, these effects are also likely to be small in scale and of short duration, in part because the probability of an offshore spill contacting most beaches is small. In the unlikely event that a spill occurs that is sufficiently large enough to affect large areas of the coast and, through public perception, have effects that reach beyond the damaged area, effects to recreation and tourism could be significant (BOEM, 2017a).

Impacts of the Macondo spill on recreation and tourism provide some insight into the potential effects of a large spill. NOAA (2016b) estimated that the public lost 16,857,116 user days of fishing, boating, and beach-going experiences as a result of the spill. The U.S. Travel Association has estimated the economic impact of the Macondo spill on tourism across the Gulf Coast over a 3-year period at \$22.7 billion (Oxford Economics, 2010). Hotels and restaurants were the most affected tourism businesses, but charter fishing, marinas, and boat dealers and sellers were among the others affected (Eastern Research Group, 2014).

C.8.5 Land Use

Land use along the northern Gulf Coast is discussed by BOEM (2017a). There are no routine IPFs that could affect land use. The project will use existing onshore support facilities in Louisiana. The land use at the existing shorebase sites is industrial. The project will not involve any new construction or changes to existing land use and therefore will not have any impacts. Levels of boat and helicopter traffic as well as demand for goods and services including scarce coastal resources will represent a small fraction of the level of activity occurring at the shorebases.

A large oil spill is the only relevant IPF on land use. A small diesel fuel spill would not have any impacts on land use, as the response would be staged out of existing shorebases and facilities.

Impacts of a Large Oil Spill

The initial response for a large oil spill would be staged out of existing facilities with no effect on land use. A large spill could have limited temporary impacts on land use along the coast if additional staging areas were needed. For example, during the Macondo spill, temporary staging areas were established in Louisiana, Mississippi, Alabama, and Florida for spill response and cleanup efforts. In the event of a large spill in the lease area, similar temporary staging areas could be needed. These areas would eventually return to their original use as the response is demobilized.

An accidental oil spill is not likely to significantly affect land use and coastal infrastructure in the region, in part because an offshore spill would have a small probability of contacting onshore resources. BOEM (2016b) states that landfill capacity would probably not be an issue at any phase of an oil spill event or the long-term recovery. In the case of the Macondo spill and response, the USEPA reported that existing landfills receiving oil spill waste had plenty of capacity to handle waste volumes; the wastes that were disposed of in landfills represented <7% of the total daily waste normally accepted at these landfills (USEPA, 2016).

C.8.6 Other Marine Uses

The lease area is not located within any USCG-designated fairway, shipping lane, or Military Warning Area. The site clearance letters for the wellsites where the proposed activities will

occur noted no one existing well within 2,000 ft (610 m) of the proposed activities (Fugro Marine Geoservices, 2017). Anadarko will comply with BOEM requirements and lease stipulations to avoid impacts to other marine uses.

There are no IPFs from routine project activities that are likely to affect other marine uses of the lease area. A large oil spill is the only relevant accident-related IPF on other marine uses. A small diesel fuel spill would not have any impacts on other marine uses because spill response activities would be mainly within the lease area and the duration would be brief.

Impacts of a Large Oil Spill

In the event of a large spill requiring numerous response vessels, coordination would be required to manage the vessel traffic for safe operations and to ensure that no anchoring or seafloor-disturbing activities occur near the existing wells. Other OCS activities located nearby the location of a large spill may be temporarily interrupted, which could include evacuation of non-essential personnel. Anadarko will comply with BOEM requirements and lease stipulations to avoid impacts on uses of the area by military vessels and aircraft.

C.9 Cumulative Impacts

For purposes of the National Environmental Policy Act, cumulative impact is defined as "the impact on the environment which results from the incremental impact of the action when added to other past, present, and reasonably foreseeable future actions regardless of what agency (federal or non-federal) or person undertakes such other actions" (40 CFR 1508.7). Any single activity or action may have a negligible impact(s) by itself, but when combined with impacts from other activities in the same area or time period, substantial impacts may result.

Prior Studies:

BOEM (2017a) prepared a multisale EIS in which it analyzed the environmental impact of activities that might occur in the multisale area. The level and types of activities planned in Anadarko's EP are within the range of activities described and evaluated by BOEM in the 2017 to 2022 Programmatic EIS for the OCS Oil and Gas Leasing Program (BOEM, 2016a), and the Final EIS for Gulf of Mexico OCS Oil and Gas Lease Sales 2017-2022 (BOEM, 2017a). Past, present, and reasonably foreseeable activities are identified in the cumulative effects scenario of these documents, which are incorporated by reference. The proposed activities should not result in any additional impacts beyond those evaluated in the multisale and Final EISs.

Description of Activities Reasonably Expected to Occur in the Vicinity of Project Area:

Other exploration and development activities are ongoing in the vicinity of the proposed project area. Anadarko does not anticipate other projects in the vicinity of the proposed project location beyond the types of projects analyzed in the lease sale and Supplemental EISs (BOEM, 2012a, b, 2013a, 2014a, 2015, 2016b, 2017a, b).

Cumulative Impacts of Activities in this DOCD:

The BOEM (2017a) Final EIS included a lengthy discussion of cumulative impacts, which analyzed the environmental and socioeconomic impacts from the incremental impacts of the 10 proposed lease sales, in addition to all activities (including non-OCS activities) projected to occur from past, proposed, and future lease sales. The following activities were considered in

development of the EISs: exploration, delineation, and development of wells, platform installation, service vessel trips, and oil spills. The EISs examined the potential cumulative effects on each specific resource for the entire Gulf of Mexico.

The level and type of activity proposed in Anadarko's DOCD are within the range of activities described and evaluated in the recent lease sale EISs. The EIA incorporates and builds on these analyses by examining the potential impacts on physical, biological, and socioeconomic resources from the work planned in this DOCD along with other reasonably foreseeable activities expected to occur in the Gulf of Mexico. Thus, for all impacts, the incremental contribution of Anadarko's proposed actions to the cumulative impacts in these prior analyses should not be significant.

D. Environmental Hazards

D.1 Geologic Hazards

The location of the wellsites where the proposed activities will occcur is free of constraining seafloor conditions (AOA Geophysics Inc, 2010a, b, Fugro Marine Geoservices, 2017). See DOCD Section D for supporting geological and geophysical information.

D.2 Severe Weather

Under most circumstances, weather is not expected to have any effect on the proposed activities. Extreme weather, including high winds, strong currents, and large waves, was considered in the design criteria for the installation vessels. High winds and limited visibility during a severe storm could disrupt support activities (vessel and helicopter traffic) and make it necessary to suspend some activities for safety reasons until the storm or weather event passes. In the event of a hurricane, procedures as outlined in the Hurricane Evacuation Plan would be adhered to. Evacuation in the event of a hurricane or other severe weather would increase the number and frequency of support vessel and helicopter trips to and from the project area.

D.3 Currents and Waves

Metocean conditions such as sea states, wind speed, and ocean currents will be continuously monitored. Under most circumstances, physical oceanographic conditions are not expected to have any effect on the proposed activities. Strong currents (e.g., caused by Loop Current eddies and intrusions) and large waves were considered in the design criteria for the installation vessels for this project. High waves during a severe storm could disrupt support activities (i.e., vessel and helicopter traffic) and make it necessary to suspend some activities for safety reasons until the storm or weather event passes.

E. Alternatives

No formal alternatives were evaluated in the EIA for this DOCD. However, various technical and operational options, including the locations of the proposed infrastructure and the selection of the installation vessels were considered by Anadarko in developing the proposed action.

F. Mitigation Measures

The proposed action includes numerous mitigation measures required by laws, regulations, and BSEE and BOEM lease stipulations and NTLs. The project will comply with all applicable federal, state, and local requirements concerning air pollutant emissions, discharges to water, and solid waste disposal. All project activities will be conducted under guidance by Anadarko's OSRP and Safety and Environmental Management System. Additional information can be found in DOCD Section I.

G. Consultation

No persons or agencies beyond those cited as Preparers (**Section H**) were consulted during the preparation of the EIA.

H. Preparers

The EIA was prepared by CSA Ocean Sciences Inc. Contributors included:

- John Tiggelaar (Project Scientist);
- Chip Baumberger (Project Scientist);
- Patrick Connelly (Project Scientist)
- Charles Hagens (Geospatial Analyst); and
- Kristen L. Metzger (Library and Information Services Director)

I. References

- ABS Consulting Inc. 2016. 2016 Update of Occurrence Rates for Offshore Oil Spills. Prepared for the Bureau of Ocean Energy Management and the Bureau of Safety and Environmental Enforcement. Contract # E15PX00045, Deliverable 7. https://www.bsee.gov/sites/bsee.gov/files/osrr-oil-spill-response-research//1086aa.pdf.
- Ackleh, A.S., G.E. Ioup, J.W. Ioup, B. Ma, J.J. Newcomb, N. Pal, N.A. Sidorovskaia, and C. Tiemann. 2012. Assessing the *Deepwater Horizon* oil spill impact on marine mammal population through acoustics: endangered sperm whales. Journal of the Acoustical Society of America 131(3): 2306-2314.
- Anderson, C.M., M. Mayes, and R. LaBelle. 2012. Update of Occurence Rates for Offshore Oil Spills. U.S.

 Department of the Interior, Bureau of Ocean Energy Management and Bureau of Safety and
 Environmental Enforcement. OCS Report BOEM 2012-069, BSEE 2012069. http://www.boem.gov/uploadedFiles/BOEM/Environmental Stewardship/Environmental Assessme
 nt/Oil Spill Modeling/AndersonMayesLabelle2012.pdf
- AOA Geophysics Inc. 2010a. Site Clearance Letter, Location H, Block 875, Keathley Canyon Area, OCS-G-21444. Letter Report No. 4051-ANA-GOM-KC875 H.
- AOA Geophysics Inc. 2010b. Site Clearance Letter, Location G, Block 875, Keathley Canyon Area, OCS-G-21444. Letter Report No. 4051-ANA-GOM-KC875 G.
- Azzara, A.J., W.M. von Zharen, and J.J. Newcomb. 2013. Mixed-methods analytic approach for determining potential impacts of vessel noise on sperm whale click behavior. Journal of the Acoustical Society of America 134(6): 4566-4574.
- Baguley, J.G., P.A. Montagna, C. Cooksey, J.L. Hyland, H.W. Bang, C.L. Morrison, A. Kamikawa, P. Bennetts, G. Saiyo, E. Parsons, M. Herdener, and M. Ricci. 2015. Community Response of Deep-sea Soft sediment Metazoan Meiofauna to the *Deepwater Horizon* Blowout and Oil Spill. Marine Ecology Progress Series 528: 127-140.
- Barkaszi, M.J., M. Butler, R. Compton, A. Unietis, and B. Bennett. 2012. Seismic survey mitigation measures and marine mammal observer reports. New Orleans, LA. OCS Study BOEM 2012-015.
- Barkuloo, J.M. 1988. Report on the Conservation Status of the Gulf of Mexico sturgeon, *Acipenser oxyrinchus desotoi*. U.S. Department of the Interior, U.S. Fish and Wildlife Service. Panama City, FL.
- Bartol, S., and D.R. Ketten. 2006. Turtle and tuna hearing. In: Swimmer, Y., Brill, R. (Eds.), Sea Turtle and Pelagic Fish Sensory Biology: Developing Techniques to Reduce Sea Turtle Bycatch in Longline Fisheries. Technical Memorandum NMFS-PIFSC-7. National Ocean and Atmospheric Administration (NOAA), US Department of Commerce, pp. 98–105.
- Bartol, S. 2014. Appendix I: Sea turtle hearing and sensitivity to acoustic impacts. In: Atlantic Outer Continental Shelf (OCS) Proposed Geological and Geophysical Activities, Mid-Atlantic and South Atlantic Planning Areas, Final Programmatic Environmental Impact Statement. OCS EIS/EA BOEM 2014-001. February 2014.
- Baum, J.K., and R.A. Myers. 2004. Shifting baselines and the decline of pelagic sharks in the Gulf of Mexico. Ecology Letters 7(2): 135-145.
- Baum, J.K., E. Medina, J.A. Musick, and M. Smale. 2015. *Carcharhinus longimanus*. The IUCN Red List of Threatened species. http://dx.doi.org/10.2305/IUCN.UK.2015.RLTS.T39374A85699641.en
- Beazley, M.J., R.J. Martinez, S. Rajan, J. Powell, Y.M. Piceno, L.M. Tom, G.L. Andersen, T.C. Hazen, J.D. Van Nostrand, J. Zhou, B. Mortazavi, and P.A. Sobecky. 2012. Microbial community analysis of a coastal salt marsh affected by the *Deepwater Horizon* oil spill. PLoS One 7(7): e41305.
- Bélanger, L., and J. Bédard. 1989. Responses of Staging Greater Snow Geese to Human Disturbance. Journal of Wildlife Management 53(3): 713-719.
- Biggs, D.C., and P.H. Ressler. 2000. Water column biology. In: Deepwater Program: Gulf of Mexico Deepwater Information Resources Data Search and Literature Synthesis. Volume I: Narrative Report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2000-049.
- Blackwell, S.B., and C.R. Greene Jr. 2003. Acoustic measurements in Cook Inlet, Alaska, during August 2001. Greeneridge Sciences, Inc., for NMFS, Anchorage, AK. 43 pp.

- Boland, G.S. 1986. Discovery of co-occurring bivalve Acesta sp. and chemosynthetic tube worms Lamellibrachia. Nature 323: 759.
- Bolle, L.J., C.A.F. de Jong, S.M. Bierman, P.J.G. Van Beek, O.A. van Keeken, P.W. Wessels, C.J.G. van Damme, H.V. Winter, D. de Haan, and R.P.A. Dekeling. 2012. Common Sole Larvae Survive High Levels of Pile-Driving Sound in Controlled Exposure Experiments. PLoS One 7(3): e33052.
- Bonde, R.K., and T.J. O'Shea. 1989. Sowerby's beaked whale (*Mesoplodon bidens*) in the Gulf of Mexico. Journal of Mammology 70: 447-449.
- Brooke, S., and W.W. Schroeder. 2007. State of deep coral ecosystems in teh Gulf of Mexico region: Texas to the Florida Straits, pp 271-306. In: S.E. Lumdsen, T.F. Hourigan, A.W. Bruckner and G. Dorr, The State of Deep Coral Ecosystems of the United States. NOAA Technical Memorandum CRCP-3, Silver Spring, MD.
- Brooks, J.M., C. Fisher, H. Roberts, E. Cordes, I. Baums, B. Bernard, R. Church, P. Etnoyer, C. German, E. Goehring, I. McDonald, H. Roberts, T. Shank, D. Warren, S. Welsh, and G. Wolff. 2012. Exploration and research of northern Gulf of Mexico deepwater natural and artificial hard-bottom habitats with emphasis on coral communities: Reefs, rigs, and wrecks "Lophelia II" Interim report. U.S. Dept. of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study BOEM 2012-106.
- Bruintjes, R., and A.N. Radford. 2013. Context-dependent impacts of anthropogenic noise on individual and social behaviour in a cooperatively breeding fish. Animal Behaviour 85(6): 1343-1349.
- Bureau of Ocean Energy Management. 2011. Archaeology Survey Blocks. http://www.boem.gov/Environmental-Stewardship/Archaeology/surveyblocks-pdf.aspx
- Bureau of Ocean Energy Management. 2012a. Gulf of Mexico OCS Oil and Gas Lease Sales: 2012-2017. Western Planning Area Lease Sales 229, 233, 238, 246, and 248. Central Planning Area Lease Sales 227, 231, 235, 241, and 247. Final Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2012-019.
- Bureau of Ocean Energy Management. 2012b. Gulf of Mexico OCS Oil and Gas Lease Sale: 2012. Central Planning Area Lease Sale 216/222. Final Supplemental Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2012-058.
- Bureau of Ocean Energy Management. 2013a. Gulf of Mexico OCS Oil and Gas Lease Sales: 2013-2014. Western Planning Are Lease Sale 233. Central Planning Area 231. Final Supplemental Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2013-0118.
- Bureau of Ocean Energy Management. 2013b. Gulf of Mexico OCS Oil and Gas Lease Sales: 2014 and 2016. Eastern Planning Area Lease Sales 225 and 226. Final Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA 2013-200.
- Bureau of Ocean Energy Management. 2014a. Gulf of Mexico OCS Oil and Gas Lease Sales: 2015-2017. Central Planning Area Lease Sales 235, 241, and 247. Final Supplemental Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2014-655.
- Bureau of Ocean Energy Management. 2014b. Gulf of Mexico OCS Oil and Gas Lease Sales: 2014-2016. Western Planning Area Lease Sales 238, 246, and 248. Final Supplemental Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2013-0118.
- Bureau of Ocean Energy Management. 2015. Gulf of Mexico OCS Oil and Gas Lease Sales: 2016 and 2017. Central Planning Area Lease Sales 241 and 247; Eastern Planning Area Lease Sale 226. Final Supplemental Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2015-033.
- Bureau of Ocean Energy Management. 2016a. Outer Continental Shelf Oil and Gas Leasing Program: 2017-2022.

 Final Programmatic Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EIA BOEM 2016-060.

- Bureau of Ocean Energy Management. 2016b. Gulf of Mexico OCS Oil and Gas Lease Sale: 2016. Western Planning Area Lease Sale 248. Final Supplemental Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2016-005.
- Bureau of Ocean Energy Management. 2016c. Essential Fish Habitat Assessment for the Gulf of Mexico. U.S. Department of the Interior. New Orleans, LA. OCS Report BOEM 2016-016.
- Bureau of Ocean Energy Management. 2017a. Gulf of Mexico OCS Oil and Gas Lease Sales: 2017-2025. Gulf of Mexico Lease Sales 249, 250, 251, 252, 253, 254, 256, 257, 259, and 261. Final Multisale Environmental Impact Statement. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2017-009.
- Bureau of Ocean Energy Management. 2017b. Gulf of Mexico OCS Oil and Gas Lease Sale. Final Supplemental Environmental Impact Statement 2018. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS EIS/EA BOEM 2017-074.
- Bureau of Ocean Energy Management. 2017c. Catastrophic Spill Event Analysis: High-Volume, Extended Duration Oil Spill Resulting from Loss of Well Control on the Gulf of Mexico Outer Continental Shelf. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS Report BOEM 2017-007.
- Bureau of Ocean Energy Management. nd. Chemosynthetic Community Locations in the Gulf of Mexico. http://www.boem.gov/Chemo-Community-Locations-in-the-GOM/
- Bureau of Ocean Energy Management, Regulation, and Enforcement. 2010. Federal & Academic Scientists Return from Deep-sea Research Cruise in Gulf of Mexico: Scientists Observe Damage to Deep-sea Corals. U.S. Department of the Interior, Bureau of Ocean Energy Management, Regulation, and Enforcement. http://www.noaanews.noaa.gov/stories2010/20101104 coralcruise.html
- Bureau of Safety and Environmental Enforcement. 2016. Offshore Incident Statistics. U.S. Department of the Interior, Bureau of Safety and Environmental Enforcement. https://www.bsee.gov/stats-facts/offshore-incident-statistics
- Callender, W.R., G.M. Staff, E.N. Powell, and I.R. MacDonald. 1990. Gulf of Mexico hydrocarbon seep communities; V. Biofacies and shell orientation of autochthonous shell beds below storm wave base. Palaios 5: 2-14.
- Camilli, R., C.M. Reddy, D.R. Yoerger, B.A. Van Mooy, M.V. Jakuba, J.C. Kinsey, C.P. McIntyre, S.P. Sylva, and J.V. Maloney. 2010. Tracking hydrocarbon plume transport and biodegradation at *Deepwater Horizon*. Science 330(6001): 201-204.
- Carmichael, R.H., W.M. Graham, A. Aven, G. Worthy, and S. Howden. 2012. Were multiple stressors a 'perfect storm' for northern Gulf of Mexico bottlenose dolphins (*Tursiops truncatus*) in 2011? PLoS One 7(7): e41155
- Carr, A. 1996. Suwanee River sturgeon, pp 73-83. In: M.H. Carr, A Naturalist in Florida. Yale University Press, New Haven, CT.
- Carroll, M., B. Gentner, S. Larkin, K. Quigley, N. Perlot, L. Degner, and A. Kroetz. 2016. An analysis of the impacts of the *Deepwater Horizon* oil spill on the Gulf of Mexico seafood industry. U.S. Department of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study BOEM 2016-020.
- Carvalho, R., C.-L. Wei, G.T. Rowe, and A. Schulze. 2013. Complex depth-related patterns in taxonomic and functional diversity of polychaetes in the Gulf of Mexico. Deep Sea Research I 80: 66-77.
- Centers for Disease Control and Prevention. 2010. Health Hazard Evaluation of *Deepwater Horizon* Response Workers. HETA 2010-0115. http://www.cdc.gov/niosh/hhe/pdfs/interim_report_6.pdf.
- Clapp, R.B., R.C. Banks, D. Morgan-Jacobs, and W.A. Hoffman. 1982a. Marine birds of the southeastern United States and Gulf of Mexico. Part I. Gaviiformes through Pelicaniformes. U.S. Fish and Wildlife Service, Office of Biological Services. Washington, DC. . FWS/OBS-82/01.
- Clapp, R.B., D. Morgan-Jacobs, and R.C. Banks. 1982b. Marine birds of the southeastern United States and Gulf of Mexico. Part II. Anseriformes. U.S. Fish and Wildlife Service, Office of Biological Services. Washington DC. FWS/OBS 82/20.
- Clapp, R.B., D. Morgan-Jacobs, and R.C. Banks. 1983. Marine birds of the southeastern United States and Gulf of Mexico. Part III. Charadriiformes. U.S. Fish and Wildlife Service, Office of Biological Services. Washington, DC. FWS/OBS-83/30.

- Compagno, L.J.V. 1984. FAO species catalogue. Vol 4. Sharks of the world. An annotated and illustrated catalogue of shark species known to date. FAO Fisheries Synopsis No. 125, Volume 4, Part 1.
- Continental Shelf Associates, Inc.. 1997. Characterization and trends of recreational and commercial fishing from the Florida Panhandle. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. USGS/BRD/CR 1997 0001 and OCS Study MMS 97-0020.
- Continental Shelf Associates, Inc. 2002. Deepwater Program: Bluewater fishing and OCS activity, interactions between the fishing and petroleum industries in deepwaters of the Gulf of Mexico. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2002-078.
- Cruz-Kaegi, M.E. 1998. Latitudinal variations in biomass and metabolism of benthic infaunal communities. Ph.D. Dissertation, Texas A&M University, College Station, TX. .
- CSA International, Inc. 2007. Characterization of northern Gulf of Mexico deepwater hard-bottom communities with emphasis on *Lophelia* coral. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2007-044.
- Daling, P.S., F. Leirvik, I.K. Almås, P.J. Brandvik, B.H. Hansen, A. Lewis, and M. Reed. 2014. Surface weathering and dispersability of MC252 crude oil. Mar. Poll. Bull. 15(87): 1-2.
- Davis, R.W., and G.S. Fargion, (eds.). 1996. Distribution and abundance of cetaceans in the north-central and western Gulf of Mexico: Technical report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 96-0026.
- Davis, R.W., J.G. Ortega-Ortiz, C.A. Ribic, W.E. Evans, D.C. Biggs, P.H. Ressler, J.H. Wormuth, R.R. Leben, K.D. Mullin, and W. B. 2000a. Cetacean habitat in the northern Gulf of Mexico, pp 217-253. In: Cetaceans, sea turtles, and seabirds in the northern Gulf of Mexico: Distribution, abundance and habitat associations. Volume II: Technical report. U.S. Geological Survey, Biological Resources Division, USGS/BRD/CR 1999 0006 and U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2000-003.
- Davis, R.W., W.E. Evans, and B. Würsig. 2000b. Cetaceans, sea turtles, and seabirds in the northern Gulf of Mexico:
 Distribution, abundance and habitat associations. Volume II: Technical Report. U.S. Geological Survey,
 Biological Resources Division, USGS/BRD/CR 1999 0006 and U.S. Department of the Interior, Minerals
 Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2000-003.
- DeGuise, S., M. Levin, E. Gebhard, L. Jasperse, L.B. Hart, C.R. Smith, S. Venn-Watson, F.I. Townsend, R.S. Wells, B.C. Balmer, E.S. Zolman, T.K. Rowles, and L.H. Schwacke. 2017. Changes in immune functions in bottlenose dolphins in the northern Gulf of Mexico associated with the *Deepwater Horizon* oil spill. Endangered Species Research 33: 291-303.
- Demopoulos, A.W.J., J.R. Bourque, E. Cordes, and K.M. Stamler. 2016. Impacts of the *Deepwater Horizon* oil spill on deep-sea coral-associated sediment communities. Marine Ecology Progress Series 561: 51-68.
- Ditty, J.G. 1986. Ichthyoplankton in neritic waters of the northern Gulf of Mexico off Louisiana: Composition, relative abundance, and seasonality. Fishery Bulletin 84(4): 935-946.
- Ditty, J.G., G.G. Zieske, and R.F. Shaw. 1988. Seasonality and depth distribution of larval fishes in the northern Gulf of Mexico above 26°00′N. Fishery Bulletin 86(4): 811-823.
- Du, M., and J.D. Kessler. 2012. Assessment of the spatial and temporal variability of bulk hydrocarbon respiration following the *Deepwater Horizon* oil spill. Environmental Science and Technology 46: 10499-10507.
- Dubinsky, E.A., M.E. Conrad, R. Chakraborty, M. Bill, S.E. Borglin, J.T. Hollibaugh, O.U. Mason, Y.M. Piceno, F.C. Reid, W.T. Stringfellow, L.M. Tom, T.C. Hazen, and G.L. Andersen. 2013. Succession of hydrocarbon-degrading bacteria in the aftermath of the *Deepwater Horizon* oil spill in the Gulf of Mexico. Environmental Science and Technology 47.
- Eastern Research Group, Inc. 2014. Assessing the impacts of the *Deepwater Horizon* oil spill on tourism in the Gulf of Mexico region. U.S. Dept. of the Interior, Bureau of Ocean Energy Management, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study BOEM 2014-661.
- Efroymson, R.A., W.H. Rose, S. Nemeth, and G.W. Sutter II. 2000. Ecological risk assessment framework for low altitude overflights by fixed-wing and rotary-wing military aircraft. Oak Ridge National Laboratory. Oak Ridge, TN. ORNL/TM-2000/289 ES-5048.
- Ehrlich, P.R., D.S. Dobkin, and D. Wheye. 1992. Birds in Jeopardy: The Imperiled and Extinct Birds of the United States and Canada, including Hawaii and Puerto Rico. Palo Alto, CA, Stanford University Press.

- Erbe, C., R. Dunlop, K.C.S. Jenner, M.N.M. Jenner, R.D. McCauley, I. Parnum, M. Parsons, T. Rogers, and C. Salgado-Kent. 2017. Review of underwater and in-air sounds emitted by Australian and Antarctic marine mammals. Acoust Australia 45: 179-241.
- Faksness, L.G., D. Altin, T. Nordtug, P.S. Daling, and B.H. Hansen. 2015. Chemical comparison and acute toxicity of water accommodated fraction (WAF) of source and field collected Macondo oils from the Deepwater Horizon oil spill. Mar. Poll. Bull. 91: 222-229.
- Felder, C.R., B. Thoma, W.E. Schmidt, T. Sauvage, S.L. Self-Krayesky, and A. Christoserdov. 2014. Seaweeds and Decapod Crustaceans on Gulf Deep Banks after the Macondo Spill. BioScience 64(9): 808-819.
- Fisher, C.R., A.W.J. Demopoulos, E.E. Cordes, I.B. Baums, H.K. White, and J.R. Borque. 2014a. Coral communities as indicators of ecosystem-level impacts of the *Deepwater Horizon* spill. BioScience 64: 796-807.
- Fisher, C.R., P.Y. Hsing, C.L. Kaiser, D.R. Yoerger, H.H. Roberts, W.W. Shedd, E.E. Cordes, T.M. Shank, S.P. Berlet, M.G. Saunders, E.A. Larcom, and J.M. Brooks. 2014b. Footprint of *Deepwater Horizon* blowout impact to deep-water coral communities. Proceedings of the National Academy of Sciences USA 111(32): 11744-11749.
- Florida Fish and Wildlife Conservation Commission. 2017a. Loggerhead nesting in Florida. http://myfwc.com/research/wildlife/sea-turtles/nesting/loggerhead/
- Florida Fish and Wildlife Conservation Commission. 2017b. Green turtle nesting in Florida. http://myfwc.com/research/wildlife/sea-turtles/nesting/green-turtle/
- Florida Fish and Wildlife Conservation Commission. 2017c. Leatherback nesting in Florida. http://myfwc.com/research/wildlife/sea-turtles/nesting/leatherback/
- Florida Fish and Wildlife Conservation Commission. 2017d. Florida's endangered and threatened species. http://myfwc.com/media/1515251/threatened-endangered-species.pdf
- Fonseca, M., G.A. Piniak, and N. Cosentino-Manning. 2017. Susceptibility of seagrass to oil spills: A case study with eelgrass, *Zostera marina* in San Francisco Bay, USA. Marine Pollution Bulletin 115(1-2): 29-38.
- Fox, D.A., J.E. Hightower, and F.M. Parauka. 2000. Gulf Sturgeon Spawning Migration and Habitat in the Choctawhatchee River System, Alabama–Florida. Transactions of the American Fisheries Society 129(3): 811-826.
- Fritts, T.H., and R.P. Reynolds. 1981. Pilot study of the marine mammals, birds, and turtles in OCS areas of the Gulf of Mexico. U.S. Department of the Interior, Fish and Wildlife Service, Biological Services Program. FWS/OBS 81/36.
- Fugro Marine Geoservices, Inc. 2017. Wellsite Clearance Letter, Proposed Wellsite KC 919 L, Block 919, Keathley Canyon Area, Gulf of Mexico. 02.17011284-2.
- Gallaway, B.J., and G.S. Lewbel. 1982. The ecology of petroleum platforms in the northwestern Gulf of Mexico: a community profile. U.S. Fish and Wildlife Service, Biological Services Program and U.S. Department of the Interior, Bureau of Land Management. Washington, D.C. FWS/OBS-82/27 and USGS Open File Report 82-03. http://www.nwrc.usgs.gov/techrpt/82-27text.pdf
- Gallaway, B.J., J.G. Cole, and R.G. Fechhelm. 2003. Selected Aspects of the Ecology of the Continental Slope Fauna of the Gulf of Mexico: A Synopsis of the Northern Gulf of Mexico Continental Slope Study, 1983-1988. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2003-072.
- Gallaway, B.J., (ed.). 1988. Northern Gulf of Mexico Continental Slope Study, Final report: Year 4. Volume II:

 Synthesis report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS

 Region. New Orleans, LA. OCS Study MMS 88-0053.
- Geraci, J.R., and D.J. St. Aubin. 1990. Sea Mammals and Oil: Confronting the Risks. San Diego, CA, Academic Press. Gibson, D., D.H. Catlin, K.L. Hunt, J.D. Fraser, S.M. Karpanty, M.J. Friedrich, M.K. Bimbi, J.B. Cohen, and S.B.
- Maddock. 2017. Evaluating the impact of man-made distasters on imperiled species: Piping plovers and the *Deepwater Horizon* oil spill. Biological Conservation 2012: 48-62.
- Gitschlag, G., B. Herczeg, and T. Barcack. 1997. Observations of sea turtles and other marine life at the explosive removal of offshore oil and gas structures in the Gulf of Mexico. Gulf Research Reports 9(4): 247-262.
- Gomez, C., J.W. Lawson, A.J. Wright, A.D. Buren, D. Tollit, and V. Lesage. 2016. A systematic review on the behavioural responses of wild marine mammals to noise: the disparity between science and policy. Canadian Journal of Zoology 94(801-819).

- Goold, J.C., and S.E. Jones. 1995. Time and frequency domain characteristics of sperm whale clicks. Journal of the Acoustical Society of America 98: 1,279-1,291.
- Gulf of Mexico Fishery Management Council. 2005. Generic Amendment Number 3 for addressing Essential Fish Habitat Requirements, Habitat Areas of Particular Concern, and adverse effects of fishing in the following Fishery Management Plans of the Gulf of Mexico: Shrimp fishery of the Gulf of Mexico, United States waters red drum fishery of the Gulf of Mexico, reef fish fishery of the Gulf of Mexico coastal migratory pelagic resources (mackerels) in the Gulf of Mexico and South Atlantic, stone crab fishery of the Gulf of Mexico, spiny lobster in the Gulf of Mexico and South Atlantic, coral and coral reefs of the Gulf of Mexico. Tampa, FL. Gulf of Mexico Fishery Management Council. 104 pp. https://gulfcouncil.org/wp-content/uploads/March-2005-FINAL3-EFH-Amendment.pdf
- Hayes, S.A., E. Josephson, K. Maze-Foley, P.E. Rosel, B. Byrd, T.V.N. Cole, L. Engleby, L.P. Garrison, J. Hatch, A. Henry, S.C. Horstman, J. Litz, M.C. Lyssikatos, K.D. Mullin, C. Orphanides, R.M. Pace, D.L. Palka, M. Soldevilla, and F.W. Wenzel. 2017. US Atlantic and Gulf of Mexico Marine Mammal Stock Assessments 2016. U.S. Department of Commerce. NOAA Technical Memorandum NMFS-NE-241.
- Hazen, T.C., E.A. Dubinsky, T.Z. DeSantis, G.L. Andersen, Y.M. Piceno, N. Singh, J.K. Jansson, A. Probst, S.E. Borglin, J.L. Fortney, W.T. Stringfellow, M. Bill, M.E. Conrad, L.M. Tom, K.L. Chavarria, T.R. Alusi, R. Lamendella, D.C. Joyner, C. Spier, J. Baelum, M. Auer, M.L. Zemla, R. Chakraborty, E.L. Sonnenthal, P. D'Haeseleer, H.Y. Holman, S. Osman, Z. Lu, J.D. Van Nostrand, Y. Deng, J. Zhou, and O.U. Mason. 2010. Deep-sea oil plume enriches indigenous oil-degrading bacteria. Science 330(6001): 204-208.
- Hazen, T.C., R.C. Prince, and N. Mahmoudi. 2016. Marine oil biodegradation. Environmental Science and Technology 50: 2121-2129.
- Hess, N.A., and C.A. Ribic. 2000. Seabird ecology, pp 275-315. In: R.W. Davis, W.E. Evans and B. Würsig, Cetaceans, sea turtles, and seabirds in the northern Gulf of Mexico: Distribution, abundance and habitat associations. Volume II: Technical report. U.S. Geological Survey, Biological Resources Division, USGS/BRD/CR 1999 0006 and U.S. Department of the Interior, Minerals Management Service, New Orleans, LA. OCS Study MMS 2000-003.
- Higashi, G.R. 1994. Ten years of fish aggregating device (FAD) design development in Hawaii. Bulletin of Marine Science 55(2-3): 651-666.
- Hildebrand, J.A. 2005. Impacts of anthropogenic sound, pp 101-124. In: J.E. Reynolds III, W.F. Perrin, R.R. Reeves, S. Montgomery and T.J. Ragen, Marine mammal research: conservation beyond crisis. Johns Hopkins University Press, Baltimore, MD.
- Hildebrand, J.A. 2009. Anthropogenic and natural sources of ambient noise in the ocean. Marine Ecology Progress Series 395: 5-20.
- Hildebrand, J.A., S. Baumann-Pickering, K.E. Frasier, J.S. Trickey, K.P. Merkens, S.M. Wiggins, M.A. McDonald, L.P. Garrison, D. Harris, T.A. Marques, and L. Thomas. 2015. Passive acoustic monitoring of beaked whale densities in the Gulf of Mexico. Scientific Reports 5(16343).
- Holand, P. 1997. Offshore Blowouts: Causes and Control. Houston, TX, Gulf Publishing Co. 163 pp.
- Holland, K.N. 1990. Horizontal and vertical movements of yellowfin and bigeye tuna associated with fish aggregating devices. Fishery Bulletin 88: 493-507.
- Hsing, P.-Y., B. Fu, E.A. Larcom, S.P. Berlet, T.M. Shank, A.F. Govindarajan, A.J. Lukasiewicz, P.M. Dixon, and C.R. Fisher. 2013. Evidence of lasting impact of the *Deepwater Horizon* oil spill on a deep Gulf of Mexico coral community. Elementa: Science of the Anthropocene 1(1): 000012.
- Intergovernmental Panel on Climate Change. 2014. Climate Change 2014: Impacts, Adaptation and Vulnerability. http://www.ipcc.ch/report/ar5/wg2/.
- International Association of Oil & Gas Producers. 2010. Risk assessment data directory: Blowout frequencies. OGP Report No. 434 2. 13 pp.
- Ji, Z.-G., W.R. Johnson, C.F. Marshall, and E.M. Lear. 2004. Oil-Spill Risk Analysis: Contingency Planning Statistics for Gulf of Mexico OCS Activities. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Report MMS 2004-026.
- Jochens, A., D.C. Biggs, D. Benoit-Bird, D. Engelhaupt, J. Gordon, C. Hu, N. Jaquet, M. Johnson, R.R. Leben, B. Mate, P. Miller, J.G. Ortega-Ortiz, A. Thode, P. Tyack, and B. Würsig. 2008. Sperm whale seismic study in the Gulf of Mexico: Synthesis report. M.M.S. U.S. Department of the Interior, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2008-006.

- Johnsgard, P.A. 1990. Hawks, Eagles, and Falcons of North America; Biology and Natural History. Washington, D.C., Smithsonian Institution Press.
- Kellar, N.M., T.R. Speakman, C.R. Smith, S.M. Lane, B.C. Balmer, M.L. Trego, K.N. Catelani, M.N. Robbins, C.D. Allen, R.S. Wells, E.S. Zolman, T.K. Rowles, and L.H. Schwacke. 2017. Low reproductive success rates of common bottlenose dolphins *Tursiops truncatus* in the northern Gulf of Mexico following the *Deepwater Horizon* disaster (2010-2015). Endangered Species Research 33: 143-158.
- Kennicutt, M.C. 2000. Chemical Oceanography, pp. 123-139. In: Continental Shelf Associates, Inc. Deepwater Program: Gulf of Mexico deepwater information resources data search and literature synthesis. Volume I: Narrative report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2000-049.
- Kenworthy, W.J., N. Consentino-Manning, L. Handley, M. Wild, and S. Rouhani. 2017. Seagrass response following exposure to *Deepwater Horizon* oil in the Chandeleur Islands, Louisiana (USA). Mar. Ecol. Prog. Ser. 576: 145-161.
- Kessler, J.D., D.L. Valentine, M.C. Redmond, M. Du, E.W. Chan, S.D. Mendes, E.W. Quiroz, C.J. Villanueva, S.S. Shusta, L.M. Werra, S.A. Yvon-Lewis, and T.C. Weber. 2011. A persistent oxygen anomaly reveals the fate of spilled methane in the deep Gulf of Mexico. Science 331: 312-315.
- King, B.S., and J.D. Gibbins. 2011. Health hazard evaluation of *Deepwater Horizon* response workers. U.S. Department of Health and Human Services, Centers for Disease Control and Prevention, National Institute for Occupational Safety and Health. Health Hazard Evaluation Report HETA 2010-0115 & 2010-0129-3138.
- Kujawinski, E.B., M.C. Kido Soule, D.L. Valentine, A.K. Boysen, K. Longnecker, and M.C. Redmond. 2011. Fate of dispersants associated with the *Deepwater Horizon* oil spill. Environmental Science and Technology 45(4): 1298-1306.
- Kyhn, L.A., J. Tougaard, and S. Sveegaard. 2011. Underwater noise from the drillship *Stena Forth* in Disko West, Baffin Bay, Greenland. http://www.dmu.dk/Pub/FR838.pdf 30 pp.
- Lane, S.M., C.R. Smith, J. Mitchell, B.C. Balmer, K.P. Barry, T. McDonald, C.S. Mori, P.E. Rosel, T.K. Rowles, T.R. Speakman, F.I. Townsend, M.C. Tumlin, R.S. Wells, E.S. Zolman, and L.H. Schwacke. 2015. Reproductive outcome and survival of common bottlenose dolphins sampled in Barataria Bay, Louisiana, USA, following the *Deepwater Horizon* oil spill. Proceedings of the Royal Society B: Biological Sciences 282(1818).
- Lewan, M.D., A. Warden, R.F. Dias, Z.K. Lowry, T.L. Hannah, P.G. Lillis, R.F. Kokaly, T.M. Hoefen, G.A. Swayze, C.T. Mills, S.H. Harris, and G.S. Plumlee. 2014. Asphaltene content and composition as a measure of *Deepwater Horizon* oil spill losses within the first 80 days. Org. Geochem. 75: 54-60.
- Lin, Q., and I.A. Mendelssohn. 2012. Impacts and recovery of the *Deepwater Horizon* oil spill on vegetation structure and function of coastal salt marshes in the northern Gulf of Mexico. Environmental Science and Technology 46(7): 3737-3743.
- Lin, Q., I.A. Mendelssohn, S.A. Graham, A. Hou, J.W. Fleeger, and D.R. Deis. 2016. Response of salt marshes to oiling from the *Deepwater Hoirzon* spill: Implications for plant growth, soil-surface erosion, and shoreline stability. Science of the Total Environment 557-558: 369-377.
- Liu, J., H.P. Bacosa, and Z. Liu. 2017. Potential environmental factors affecting oil-degrading bacterial populations in deep and surface waters of the northern Gulf of Mexico. Frontiers in Microbiology 7:2131.
- Lohoefener, R., W. Hoggard, K.D. Mullin, C. Roden, and C. Rogers. 1990. Association of sea turtles with petroleum platforms in the north central Gulf of Mexico. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 90-0025.
- Lutcavage, M.E., P.L. Lutz, G.D. Bossart, and D.M. Hudson. 1995. Physiologic and clinicopathologic effects of crude oil on loggerhead sea turtles. Archives of Environmental Contamination and Toxicology 28(4): 417-422.
- Lutcavage, M.E., P. Plotkin, B. Witherington, and P.L. Lutz. 1997. Human impacts on sea turtle survival, pp pp. 387-409. In: P.L. Lutz and J.A. Musick, The Biology of Sea Turtles. CRC Press, Boca Raton, FL.
- MacDonald, I.R., W.W. Schroeder, and J.M. Brooks. 1995. Northern Gulf of Mexico Chemosynthetic Ecosystems Study. Final Report. Volume II: Technical Report. OCS Study MMS 95-0022. 335 pp.
- MacDonald, I.R.e. 2002. Stability and Change in Gulf of Mexico Chemosynthetic Communities. Volume II: Technical Report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2002-036.

- Main, C.E., H.A. Ruhl, D.O.B. Jones, A. Yool, B. Thornton, and D.J. Mayor. 2015. Hydrocarbon contamination affects Deep-sea benthic oxygen uptake and microbial community composition. Deep Sea Research. Part I:

 Oceanographic Research Papers 100: 79-87.
- Marine Mammal Commission. 2011. Assessing the long-term effects of the BP *Deepwater Horizon* oil spill on marine mammals in the Gulf of Mexico: A statement of research needs. http://www.mmc.gov/wp-content/uploads/longterm effects bp oilspil.pdf
- Mathias, D., A.M. Thode, J. Straley, and R.D. Andrews. 2013. Acoustic tracking of sperm whales in the Gulf of Alaska using a two element vertical array and tags. Journal of the Acoustical Society of America 134: 2446–2461.
- McDonald, T.L., F.E. Hornsby, T.R. Speakman, E.S. Zolman, K.D. Mullin, C. Sinclair, P.E. Rosel, L. Thomas, and L.H. Schwacke. 2017. Survival, density, and abundance of common bottlenose dolphins in Barataria Bay (USA) following the *Deepwater Horizon* oil spill. Endangered Species Research 33: 193-209.
- McKenna, M.F., D. Ross, S.M. Wiggins, and J.A. Hildebrand. 2012. Underwater radiated noise from modern commercial ships. Journal of the Acoustical Society of America 131: 92-103.
- McLaughlin, K.E., and H.P. Kunc. 2015. Changes in the acoustic environment alter the foraging and sheltering behaviour of the cichlid *Amititlania nigrofasciata*. Behavioural processes 116: 75-79.
- Mendelssohn, I.A., G.L. Andersen, D.M. Baltx, R.H. Caffey, K.R. Carman, J.W. Fleeger, S.B. Joyce, Q. Lin, E. Maltby, E.B. Overton, and L.P. Rozas. 2012. Oil impacts on coastal wetlands: Implications for the Mississippi River delta ecosystem after the *Deepwater Horizon* oil spill. BioScience 62(6): 562-574.
- Mississippi Natural Heritage Program. 2015. Listed species of Mississippi. Museum of Natural Science, Mississippi Deptartment of Wildlife, Fisheries, and Parks. Jackson,

 MS. http://www.mdwfp.com/media/246709/t e 2015.pdf
- Møhl, B., M. Wahlberg, and P.T. Madsen. 2003. The monopulsed nature of sperm whale clicks. Journal of the Acoustical Society of America 114(2): 1143-1154.
- Montagna, P.A., J.G. Baguley, C. Cooksey, I. Hartwell, L.J. Hyde, J.L. Hyland, R.D. Kalke, L.M. Kracker, M. Reuscher, and A.C. Rhodes. 2013. Deep-sea benthic footprint of the *Deepwater Horizon* blowout. PLoS One 8(8): e70540.
- Morrow, J.V.J., J.P. Kirk, K.J. Killgore, H. Rugillio, and C. Knight. 1998. Status and recovery of Gulf sturgeon in the Pearl River system, Louisiana-Mississippi. North American Journal of Fisheries Management 18: 798-808.
- Mullin, K.D., W. Hoggard, C. Roden, R. Lohoefener, C. Rogers, and B. Taggart. 1991. Cetaceans on the upper continental slope in the north-central Gulf of Mexico. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 91-0027.
- Mullin, K.D. 2007. Abundance of cetaceans in the oceanic Gulf of Mexico based on 2003-2004 ship surveys. U.S. Department of Commerce, National Marine Fisheries Service, Southeast Fisheries Science Center. Pascagoula, MS.
- Myrberg Jr., A.A. 2000. The acoustical biology of elasmobranchs. Environmental Biology of Fishes 60: 31-45.
- National Marine Fisheries Service. 2007. Endangered Species Act, Section 7 Consultation Biological Opinion. Gulf of Mexico Oil and Gas Activities: Five Year Leasing Plan for Western and Central Planning Areas 2007-2012. U.S. Department of Commerce, National Oceanic and Atmospheric Administration. St. Petersburg, FL. http://www.nmfs.noaa.gov/ocs/mafac/meetings/2010_06/docs/mms_02611_leases_2007_2012.pdf
- National Marine Fisheries Service and U.S. Fish and Wildlife Service. 2008. Recovery Plan for the Northwest Atlantic Population of the Loggerhead Sea Turtle (*Caretta caretta*), Second Revision. http://www.nmfs.noaa.gov/pr/pdfs/recovery/turtle_loggerhead_atlantic.pdf
- National Marine Fisheries Service. 2009a. Sperm Whale (*Physeter macrocephalus*) 5-Year Review: Summary and Evaluation. National Oceanic and Atmospheric Administration, National Marine Fisheries Service, Office of Sustainable Fisheries, Highly Migratory Species Management Division. Silver Spring, MD.
- National Marine Fisheries Service. 2009b. Final Amendment 1 to the Consolidated Atlantic Highly Migratory Species Fishery Management Plan Essential Fish Habitat. Highly Migratory Species Management Division, Office of Sustainable Fisheries. Silver Spring,

 MD. http://pbadupws.nrc.gov/docs/ML1219/ML12195A241.pdf
- National Marine Fisheries Service. 2010a. *Deepwater Horizon*/BP oil spill: size and percent coverage of fishing area closures due to BP oil
 - spill. http://sero.nmfs.noaa.gov/deepwater-horizon/size-percent-closure/index.html

- National Marine Fisheries Service. 2010b. Final recovery plan for the sperm whale (*Physeter macrocephalus*). Silver Spring, MD. http://www.nmfs.noaa.gov/pr/pdfs/health/oil_impacts.pdf
- National Marine Fisheries Service, U.S. Fish and Wildlife Service and Secretaría de Medio Ambiente y Recursos Naturales. 2011. Bi-National Recovery Plan for the Kemp's Ridley Sea Turtle (*Lepidochelys kempii*), Second Revision. http://www.nmfs.noaa.gov/pr/pdfs/recovery/kempsridley-revision2.pdf
- National Marine Fisheries Service. 2011. Species of concern: Atlantic bluefin tuna, *Thunnus thynnus*. http://www.nmfs.noaa.gov/pr/pdfs/species/bluefintuna_detailed.pdf
- National Marine Fisheries Service. 2014a. Sea turtles, dolphins, and whales and the Gulf of Mexico oil spill. http://www.nmfs.noaa.gov/pr/health/oilspill/gulf2010.htm
- National Marine Fisheries Service. 2014b. Loggerhead Sea Turtle Critical Habitat in the Northwest Atlantic Ocean. http://www.nmfs.noaa.gov/pr/species/turtles/criticalhabitat loggerhead.htm
- National Marine Fisheries Service. 2014c. Gulf sturgeon (*Acipenser oxyrinchus desotoi*). http://www.nmfs.noaa.gov/pr/species/fish/gulfsturgeon.htm
- National Marine Fisheries Service. 2015. Endangered Species Act Section 7 Consultation Biological Opinion for the Virginia Offshore Wind Technology Advancement Project. NER-2015-12128
- National Marine Fisheries Service. 2016. Technical Guidance for Assessing the Effects of Anthropogenic Sound on Marine Mammal Hearing: Underwater Acoustic Thresholds for Onset of Permanent and Temporary Threshold Shifts. NOAA Technical Memorandum NMFS-OPR-55.
- National Marine Fisheries Service. 2018. Oceanic Whitetip Shark. https://www.fisheries.noaa.gov/species/oceanic-whitetip-shark
- National Oceanic and Atmospheric Administration. 2006. Fact Sheet: Small Diesel Spills (500-5,000 gallons). NOAA Scientific Support Team, Hazardous Materials Response and Assessment Division. Seattle, WA.
- National Oceanic and Atmospheric Administration. 2010. Oil and Sea Turtles. Biology, Planning, and Response. U.S. Department of Commerce, National Ocean Service, Office of Response and Restoration. 111 pp. http://response.restoration.noaa.gov/sites/default/files/Oil Sea Turtles.pdf
- National Oceanic and Atmospheric Administration. 2011a. Joint Analysis Group. *Deepwater Horizon* oil spill:

 Review of preliminary data to examine subsurface oil in the vicinity of MC252#1, May 19 to June 19, 2010.

 U.S. Department of Commerce, National Ocean Service. Silver Spring, MD. NOAA Technical Report NOS

 OR&R 25. http://service.ncddc.noaa.gov/rdn/www/media/documents/activities/jag-reports/NTR-NOS-ORR-25-082011.pdf
- National Oceanic and Atmospheric Administration. 2011b. Joint Analysis Group, *Deepwater Horizon* oil spill:
 Review of R/V Brooks McCall data to examine subsurface oil. U.S. Department of Commerce, National
 Ocean Service. Silver Spring, MD. NOAA Technical Report NOS OR&R
 24. http://service.ncddc.noaa.gov/rdn/www/media/documents/activities/jag-reports/NTR-NOS-ORR-24-062011.pdf
- National Oceanic and Atmospheric Administration. 2011c. Joint Analysis Group, *Deepwater Horizon* oil spill: Review of preliminary data to examine oxygen levels in the vicinity of MC252#1 May 8 to August 9, 2010. U.S. Department of Commerce, National Ocean Service. Silver Spring, MD. NOAA Technical Report NOS OR&R 26. http://service.ncddc.noaa.gov/rdn/www/media/documents/activities/jag-reports/NTR-NOS-ORR-26-082011.pdf
- National Oceanic and Atmospheric Administration. 2014. Flower Garden Banks National Marine Sanctuary. http://flowergarden.noaa.gov/about/cnidarianlist.html
- National Oceanic and Atmospheric Administration. 2016a. ADIOS 2 (Automated Data Inquiry for Oil Spills). http://response.restoration.noaa.gov/oil-and-chemical-spills/oil-spills/response-tools/downloading-installing-and-running-adios.html
- National Oceanic and Atmospheric Administration. 2016b. *Deepwater Horizon* Oil Spill: Final Programmatic Damage Assessment and Restoration Plan and Final Programmatic Environmental Impact Statement. http://www.gulfspillrestoration.noaa.gov/restoration-planning/gulf-plan/
- National Oceanic and Atmospheric Administration. 2016c. Cetacean Unusual Mortality Event in Northern Gulf of Mexico (2010-2014). http://www.nmfs.noaa.gov/pr/health/mmume/cetacean_gulfofmexico.htm

- National Oceanic and Atmospheric Administration. 2017a. Small Diesel Spills (500 5,000 gallons). U.S. Department of Commerce, National Oceanic and Atmospheric Administration, Office of Response and Restoration. http://response.restoration.noaa.gov/oil-and-chemical-spills/oil-spills/resources/small-diesel-spills.html
- National Oceanic and Atmospheric Administration. 2017b. Oil Types. Office of Response and Restoration. http://response.restoration.noaa.gov/oil-and-chemical-spills/oil-spills/oil-types.html
- National Oceanic and Atmospheric Administration. NOAA Fisheries West Coast Region. 2018. Marine Mammal Acoustic
 - Thresholds. http://www.westcoast.fisheries.noaa.gov/protected species/marine mammals/threshold gu idance.html
- National Park Service. 2010. Breton Wilderness 300 km
 Radius. https://www.fws.gov/refuges/airquality/docs/Breton WA300km.pdf
- National Research Council. 1983. Drilling Discharges in the Marine Environment. Washington, DC. National Academy Press. 180 pp.
- National Research Council. 2003a. Oil in the Sea III: Inputs, Fates, and Effects. Washington, DC. National Academy Press. 182 pp. + app.
- National Research Council. 2003b. Ocean Noise and Marine Mammals. Washington, DC. National Academy Press. 204 pp.
- National Wildlife Federation. 2016a. Oil Spill Impacts on Marine Mammals. http://www.nwf.org/What-We-Do/Protect-Habitat/Gulf-Restoration/Oil-Spill/Effects-on-Wildlife/Mammals.aspx
- National Wildlife Federation. 2016b. Wildlife Library: Whooping Crane. <a href="http://www.nwf.org/wildlife/wil
- Natural Resources Defense Council. 2014. A petition to list the Gulf of Mexico Bryde's whale (*Balaenoptera edeni*) as endangered under the Endangered Species

 Act. https://www.nrdc.org/sites/default/files/wil 14091701a.pdf
- Nedelec, S.L., A.N. Radford, L. Pearl, B. Nedelec, M.I. McCormick, M.G. Meekan, and S.D. Simpson. 2017.

 Motorboat noise impacts parental behaviour and offspring survival in a reef fish. Proceedings of the Royal Society B: Biological Sciences 1856: 20170143.
- Nowlin, W.D.J., A.E. Jochens, S.F. DiMarco, R.O. Reid, and M.K. Howard. 2001. Deepwater Physical Oceanography Reanalysis and Synthesis of Historical Data: Synthesis Report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2001-064.
- Operational Science Advisory Team. 2010. Summary report for sub-surface and sub sea oil and dispersant detection: Sampling and monitoring. Prepared for Paul F. Zukunft, U.S. Coast Guard Federal On Scene Coordinator, *Deepwater Horizon*MC252. http://www.restorethegulf.gov/sites/default/files/documents/pdf/OSAT_Report_FINAL_17DEC.p
- Oxford Economics. 2010. Potential impact of the Gulf oil spill on tourism. Report prepared for the U.S. Travel Association. http://www.mississippiriverdelta.org/blog/files/2010/10/Gulf Oil Spill Analysis Oxford Economics 710.pdf.
- Peabody, M.B., and C.A. Wilson. 2006. Fidelity of red snapper (*Lutjanus campechanus*) to petroleum platforms and artificial reefs in the northern Gulf of Mexico. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2006-005.
- Peake, D.E. 1996. Bird surveys, pp. 271-304. In: R.W. Davis and G.S. Fargion (eds.), Distribution and abundance of cetaceans in the north central and western Gulf of Mexico, Final report. Volume II: Technical report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region New Orleans, LA. OCS Study MMS 96-0027.
- Picciulin, M., L. Sebastianutto, A. Codarin, A. Farina, and E.A. Ferrero. 2010. In situ behavioural responses to boat noise exposure of *Gobius cruentatus* (Gmelin, 1789; fam. Gobiidae) and Chromis chromis (Linnaeus, 1758; fam. Pomacentridae) living in a Marine Protected Area. Journal of Experimental Marine Biology and Ecology 386(1): 125-132.

- Popper, A.N., A.D. Hawkins, R.R. Fay, D. Mann, S. Bartol, T.J. Carlson, S. Coombs, W.T. Ellison, R.L. Gentry, M.B. Halvorsen, S. Lokkeborg, P. Rogers, B.L. Southall, D. Zeddies, and W.N. Tavolga. 2014. Sound Exposure Guidelines for Fishes and Sea Turtles: A Technical Report. ASA S3/SC1.4 TR-2014 prepared by ANSI-Accredited Standards Committee S3/SC1 and registered with ANSI. ASA Press, Springer.
- Powers, K. 1987. Seabirds, pp 194-201. In: J.D. Milliman and W.R. Wright, The Marine Environment of the U.S. Atlantic Continental Slope and Rise. Jones and Bartlett Publishers, Inc., Boston/Woods Hole, MA.
- Powers, S.P., F.J. Hernandez, R.H. Condon, J.M. Drymon, and C.M. Free. 2013. Novel pathways for injury from offshore oil spills: Direct, sublethal and indirect effects of the *Deepwater Horizon* oil spill on pelagic *Sargassum* communities. PLoS One 8(9): e74802.
- Pritchard, P.C.H. 1997. Evolution, phylogeny, and current status, pp In: P.L. Lutz and J.A. Musick, The Biology of Sea Turtles. CFC Press, Boca Raton, FL.
- Radford, A.N., E. Kerridge, and S.D. Simpson. 2014. Acoustic communication in a noisy world: Can fish compete with anthropogenic noise? . Behavioral Ecology 25(5): 1,022 1,030.
- Rathbun, G.B. 1988. Fixed-wing airplane versus helicopter surveys of manatees. Marine Mammal Science 4(1): 71-75.
- Relini, M., L.R. Orsi, and G. Relini. 1994. An offshore buoy as a FAD in the Mediterranean. Bulletin of Marine Science 55(2-3): 1099-1105.
- Reuscher, M.G., J.G. Baguley, N. Conrad-Forrest, C. Cooksey, J.L. Hyland, C. Lewis, P.A. Montagna, R.W. Ricker, M. Rohal, and T. Washburn. 2017. Temporal patterns of *Deepwater Horizon* impacts on the benthic infauna of the northern Gulf of Mexico continental slope. PLoS One 12(6): e0179923.
- Richards, W.J., T. Leming, M.F. McGowan, J.T. Lamkin, and S. Kelley-Farga. 1989. Distribution of fish larvae in relation to hydrographic features of the Loop Current boundary in the Gulf of Mexico. ICES Marine Science Symposia 191: 169-176.
- Richards, W.J., M.F. McGowan, T. Leming, J.T. Lamkin, and S. Kelley-Farga. 1993. Larval fish assemblages at the Loop Current boundary in the Gulf of Mexico. Bulletin of Marine Science 53(2): 475-537.
- Richardson, W.J., C.R. Greene Jr., C.I. Malme, and D.H. Thomson. 1995. Marine Mammals and Noise. San Diego, CA, Academic Press.
- Rodgers, J.A., and S.T. Schwikert. 2002. Buffer-Zone Distances to Protect Foraging and Loafing Waterbirds from Disturbance by Personal Watercraft and Outboard-Powered Boats. Conservation Biology 16(1): 216-224.
- Ross, S.W., A.W.J. Demopoulos, C.A. Kellogg, C.L. Morrison, M.S. Nizinski, C.L. Ames, T.L. Casazza, D. Gualtieri, K. Kovacs, J.P. McClain, A.M. Quattrini, A.Y. Roa-Varón, and A.D. Thaler. 2012. Deepwater Program: Studies of Gulf of Mexico lower continental slope communities related to chemosynthetic and hard substrate habitats. U.S. Department of the Interior, U.S. Geological Survey. U.S. Geological Survey Open-File Report 2012-1032.
- Rowe, G.T., and M.C. Kennicutt. 2009. Northern Gulf of Mexico Continental Slope Habitats and Benthic Ecology Study. Final Report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2009-039.
- Rudd, M.B., R.N.M. Ahrens, W.E. Pine III, and S.K. Bolden. 2014. Empirical spatially explicit natural mortality and movement rate estimates for the threatened Gulf Sturgeon (*Acipenser oxyrinchus desotoi*). Canadian Journal of Fisheries and Aquatic Sciences 71: 1407-1417.
- Russell, R.W. 2005. Interactions between migrating birds and offshore oil and gas platforms in the northern Gulf of Mexico: Final Report. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2005-009.
- Salmon, M., and J. Wyneken. 1990. Do swimming loggerhead sea turtles (*Caretta caretta L.*) use light cues for offshore orientation? Marine and Freshwater Behaviour and Physiology 17(4): 233-246.
- Samuel, Y., S.J. Morreale, C.W. Clark, C.H. Greene, and M.E. Richmond. 2005. Underwater, low-frequency noise in a coastal sea turtle habitat. Journal of the Acoustical Society of America 117(3): 1465-1472.
- Schwacke, L.H., C.R. Smith, F.I. Townsend, R.S. Wells, L.B. Hart, B.C. Balmer, T.K. Collier, S. De Guise, M.M. Fry, L.J. Guillette, Jr., S.V. Lamb, S.M. Lane, W.E. McFee, N.J. Place, M.C. Tumlin, G.M. Ylitalo, E.S. Zolman, and T.K. Rowles. 2014. Response to comment on health of common bottlenose dolphins (*Tursiops truncatus*) in Barataria Bay, Louisiana following the *Deepwater Horizon* oil spill. Environmental Science and Technology 48(7): 4209-4211.
- Share the Beach. 2016. Nesting season statistics. http://www.alabamaseaturtles.com/nesting-season-statistics/

- Silliman, B.R., J. van de Koppel, M.W. McCoy, J. Diller, G.N. Kasozi, K. Earl, P.N. Adams, and A.R. Zimmerman. 2012. Degradation and resilience in Louisiana salt marshes after the BP-*Deepwater Horizon* oil spill. Proceedings of the National Academy of Sciences USA 109(28): 11234-11239.
- Smultea, M.A., J.R. Mobley Jr., D. Fertl, and G.L. Fulling. 2008. An unusual reaction and other observations of sperm whales near fixed wing aircraft. Gulf and Caribbean Research 20: 75-80.
- Solomon, G.M., and S. Janssen. 2010. Health effects of the Gulf oil spill. JAMA 304(10): 1118-1119.
- Spier, C., W.T. Stringfellow, T.C. Hazen, and M. Conrad. 2013. Distribution of hydrocarbons released during the 2010 MC252 oil spill in deep offshore waters. Environmental Pollution 173: 224-230.
- State of Louisiana Department of Wildlife and Fisheries. 2005. Chapter 4 Conservation habits and species assessments. http://www.wlf.louisiana.gov/sites/default/files/pdf/document/32857-chapter-4-conservation-habitats-and-species-
 - assessments/13 chapter 4 conservation habitats species assessmen.pdf
- Stout, S.A., J.R. Payne, S.D. Emso-Mattingly, and G. Baker. 2016. Weathering of field-collected floating and stranded Macondo oils during and shortly after the *Deepwater Horizon* oil spill. Marine Pollution Bulletin 105: 7-22.
- Stout, S.A., and J.R. Payne. 2016. Macondo oil in deep-sea sediments: Part 1 sub-sea weathering of oil deposited on the seafloor. Marine Pollution Bulletin 111: 365-380.
- Sulak, K.J., and J.P. Clugston. 1998. Early life history stages of Gulf sturgeon in the Suwanee River, Florida. Transactions of the American Fisheries Society 127: 758-771.
- Takeshita, R., L. Sullivan, C.R. Smith, T.K. Collier, A. Hall, T. Brosnan, T.K. Rowles, and L.H. Schwacke. 2017. The Deepwater Horizon oil spill marine mammal injury assessment. Endangered Species Research 33: 95-106.
- Tarr, M.A., P. Zito, E.B. Overton, G.M. Olson, P.L. Adhikari, and C.M. Reddy. 2016. Weathering of oil in the marine environment. Oceanography 29(3): 126-135.
- Todd, V.L.G., W.D. Pearse, N.C. Tegenza, P.A. Lepper, and I.B. Todd. 2009. Diel echolocation activity of harbour porpoises (*Phocoena phocoena*) around North Sea offshore gas installations. ICES Journal of Marine Science 66: 734-745.
- Turner, R.E., G. McClenachan, and A.W. Tweel. 2016. Islands in teh oil: Quantifying salt marsh shoreline erosion after the *Deepwater Horizon* oiling. Marine Pollution Bulletin 110: 216-323.
- Turtle Island Restoration Network. 2017. Kemp's Ridley Sea Turtle Count on the Texas Coast. https://seaturtles.org/turtle-count-texas-coast/
- Tuxbury, S.M., and M. Salmon. 2005. Competitive interactions between artificial lighting and natural cues during seafinding by hatchling marine turtles. Biological Conservation 121: 311-316.
- U.S. Department of Commerce, Economics and Statistics Administration. 2010. Estimating the effects of the deepwater drilling moratorium on the Gulf coast economy. Inter-agency economic report. http://www.esa.doc.gov/Reports/estimating-economic-effects-deepwater-drilling-moratorium-gulf-coast-econom
- U.S. Environmental Protection Agency. 2016. Questions and answers about the BP oil spill in the Gulf Coast. http://archive.epa.gov/bpspill/web/html/qanda.html
- U.S. Environmental Protection Agency. 2018. The green book nonattainment areas for criteria pollutants. https://www.epa.gov/green-book
- U.S. Fish and Wildlife Service, Gulf States Marine Fisheries Commission and National Marine Fisheries Service.

 1995. Gulf Sturgeon Recovery/Management Plan. U.S. Department of Interior, U.S. Fish and Wildlife Service, Southeast Region. Atlanta, GA. http://www.nmfs.noaa.gov/pr/pdfs/recovery/sturgeon_gulf.pdf
- U.S. Fish and Wildlife Service. 2001. Florida manatee recovery plan (*Trichechus manatus latirostris*), Third Revision. U.S. Department of the Interior, Southeast Region. Atlanta, GA.
- U.S. Fish and Wildlife Service. 2003. Recovery plan for the Great Lakes Piping Plover (*Charadrius melodus*). U.S. Department of the Interior. Fort Snelling, MN.
- U.S. Fish and Wildlife Service. 2007. International Recovery Plan: Whooping Crane (*Grus americana*), Third Revision. U.S. Department of the Interior. Albequerque, NM.
- U.S. Fish and Wildlife Service. 2010a. Effects of oil on wildlife and
 - habitat. http://www.fws.gov/home/dhoilspill/pdfs/DHJICFWSOillmpactsWildlifeFactSheet.pdf
- U.S. Fish and Wildlife Service. 2010b. Bech-nesting birds of the
 - Gulf. http://www.fws.gov/home/dhoilspill/pdfs/DHBirdsOfTheGulf.pdf

- U.S. Fish and Wildlife Service. 2011. FWS *Deepwater Horizon* Oil Spill Response. Bird Impact Data and Consolidated Wildlife Reports. *Deepwater Horizon* Bird Impact Data from the DOI-ERDC NRDA Database 12 May 2011. http://www.fws.gov/home/dhoilspill/pdfs/Bird%20Data%20Species%20Spreadsheet%2005122011. pdf
- U.S. Fish and Wildlife Service. 2015. Bald and Golden Eagle
 Information. http://www.fws.gov/birds/management/managed-species/bald-and-golden-eagle-information.php
- U.S. Fish and Wildlife Service. 2016a. Hawksbill sea turtle (*Eretmochelys imbricata*). http://www.fws.gov/northflorida/SeaTurtles/Turtle%20Factsheets/hawksbill-sea-turtle.htm
- U.S. Fish and Wildlife Service. 2016b. Find Endangered Species. http://www.fws.gov/endangered/
- U.S. Fish and Wildlife Service. 2017. Whooping Crane Survey Results: Winter 20162017. https://www.fws.gov/uploadedFiles/Region 2/NWRS/Zone 1/Aransas-
 Matagorda Island Complex/Aransas/Sections/What We Do/Science/Whooping Crane Updates 2013/WHCR Update Winter 2016-2017.pdf
- U.S. Fish and Wildlife Service. nd. All About Piping Plovers. http://www.fws.gov/plover/facts.html
- U.S. Geological Survey. 2011. Cold-water coral ecosystem studies: U.S. Gulf of Mexico. http://fl.biology.usgs.gov/pdf/20100504Gulf corals v1.pdf
- Valentine, D.L., G.B. Fisher, S.C. Bagby, R.K. Nelson, C.M. Reddy, S.P. Sylva, and M.A. Woo. 2014. Fallout plume of submerged oil from *Deepwater Horizon*. Proceedings of the National Academy of Sciences USA 111(45): 906-915.
- Venn-Watson, S., K.M. Colegrove, J. Litz, M. Kinsel, K. Terio, J. Saliki, S. Fire, R.H. Carmichael, C. Chevis, W. Hatchett, J. Pitchford, M.C. Tumlin, C. Field, S. Smith, R. Ewing, D. Fauquier, G. Lovewell, H. Whitehead, D. Rotstein, W.E. McFee, and E. Fougeres. 2015. Adrenal Gland and Lung Lesions in Gulf of Mexico Common Bottlenose Dolphins (*Tursiops truncates*) Found Dead following the *Deepwater Horizon* Oil Spill. PLoS One 10(5): e0126538.
- Volkes, H.E. 1963. Studies on tertiary and recent giant Limidae. Tulane Studies in Geology 1: 75-92.
- Wakeford, A. 2001. State of Florida conservation plan for Gulf sturgeon (*Acipencer oxyrinchus desotoi*). Florida Marine Research Institute Technical Report TR-8.
- Waring, G.T., E. Josephson, K. Maze-Foley, and P.E.e. Rosel. 2016. U.S. Atlantic and Gulf of Mexico Marine Mammal Stock Assessments 2015. U.S. Department of Commerce, National Oceanic and Atmospheric Administration. NOAA Technical Memorandum NMFS NE 238.
- Wei, C.-L. 2006. The bathymetric zonation and community structure of deep-sea macrobenthos in the northern Gulf of Mexico. M.S. Thesis, Texas A&M University. http://repository.tamu.edu/handle/1969.1/4927
- Wei, C.-L., G.T. Rowe, G.F. Hubbard, A.H. Scheltema, G.D.F. Wilson, I. Petrescu, J.M. Foster, M.K. Wickstein, M. Chen, R. Davenport, Y. Soliman, and Y. Wang. 2010. Bathymetric zonation of deep-sea macrofauna in relation to export of surface phytoplankton production. Marine Ecology Progress Series 39: 1-14.
- Weilgart, L., and H. Whitehead. 1993. Coda communication by sperm whales (*Physeter macrocephalus*) off the Galapagos Islands. Canadian Journal of Zoology 71: 744-752.
- White, H.K., P.Y. Hsing, W. Cho, T.M. Shank, E.E. Cordes, A.M. Quattrini, R.K. Nelson, R. Camilli, A.W.J. Demopoulos, C. German, J.M. Brooks, H. Roberts, W.W. Shedd, C.M. Reddy, and C. Fisher. 2012. Impact of the Deepwater Horizon oil spill on a deep-water coral community in the Gulf of Mexico. Proceedings of the National Academy of Sciences USA 109(50): 20303-20308.
- Wiese, F.K., W.A. Montevecchi, G.K. Davoren, F. Huettmann, A.W. Diamond, and J. Linke. 2001. Seabirds at risk around offshore oil platforms in the north-west Atlantic. Marine Pollution Bulletin 42(12): 1285-1290.
- Williams, R., E. Ashe, and P.D. O'Hara. 2011. Marine mammals and debris in coastal waters of British Columbia, Canada. Marine Pollution Bulletin 62(6): 1303-1316.
- Wilson, C.A., A. Pierce, and M.W. Miller. 2003. Rigs and reefs: A comparison of the fish communities at two artificial reefs, a production platform, and a natural reef in the northern Gulf of Mexico. U.S. Department of the Interior, Minerals Management Service, Gulf of Mexico OCS Region. New Orleans, LA. OCS Study MMS 2003-009.
- Wilson, J. 2003. Manatees in Louisiana. Louisiana Conservationist July/August 2003: 7 pp.

- Witherington, B. 1997. The problem of photopollution for sea turtles and other nocturnal animals, pp 303-328. In: J.R. Clemmons and R. Buchholz, Behavioral Approaches to Conservation in the Wild. Cambridge University Press, Cambridge, England.
- Würsig, B., S.K. Lynn, T.A. Jefferson, and K.D. Mullin. 1998. Behaviour of cetaceans in the northern Gulf of Mexico relative to survey ships and aircraft. Aquatic Mammals 24(1): 41-50.
- Würsig, B., T.A. Jefferson, and D.J. Schmidly. 2000. The Marine Mammals of the Gulf of Mexico. College Station, TX, Texas A&M University Press.

Q ADMINISTRATIVE INFORMATION

(a) Proprietary Information

Proprietary copies of this plan contain information not available to the public and include structure maps, seismic information, cross sections, depths of wells, etc.

(b) Bibliography

- 1. Shallow Hazards Report
- 2. Fugro Geoservices, Inc. Archaeological Report
- 3. Initial EP Control No. N-9623, N-9593 and N-9428
- 4. Supplemental EP Control No. S-7848 and S-7882
- 5. Revised EP Control No. R-6450
- 6. Final Sale Packages for Gulf of Mexico, Sale Number 174 and 206